



Data sheet



BNC Straight Bulkhead Jack Receptacle

RS stock No: 5464465

| NO | DESCRIPTION | DATE |
|----|---------------------------------|-----------|
| △ | CENTER CONTACT DIRECTION MODIFY | 12.24.02 |
| △ | BACKGROUND FORMAT UPDATED | 11.11.08' |
| △ | DEL INTERFACE | 08.03.09' |

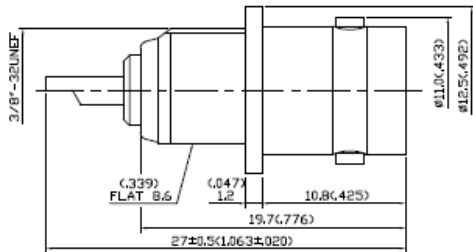

12/12/2011



MOUNTING HOLE
SCALE 3:1

APPROVED by _____ DATE: _____

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-1 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 WORKING VOLTAGE: 500 VOLTS MAX.
- 1.4 PROOF VOLTAGE: 1500 VOLTS

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C19300
- 2.3 INSULATION: TEFLON PER ASTM D1487 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

4.0 ENVIRONMENTAL

- 4.1 OPERATING TEMPERATURE RANGE: -65° C TO +105° C

| NO | DESCRIPTION | MATERIAL | Q'TY | FINISH |
|----|----------------|------------------|------|------------------|
| 7 | INSULATION | TEFLON | 1 | NONE |
| 6 | BODY | BRASS | 1 | SILVER 70 μ MIN. |
| 5 | CENTER CONTACT | BERYLLIUM COPPER | 1 | SILVER 70 μ MIN. |
| 4 | INSULATION | TEFLON | 1 | NONE |
| 3 | WASHER | BRASS | 1 | SILVER 70 μ MIN. |
| 2 | NUT | BRASS | 1 | SILVER 70 μ MIN. |
| 1 | WASHER | BRASS | 1 | SILVER 70 μ MIN. |

| DESCRIPTION | | BNC STRAIGHT BULKHEAD JACK RECEPTACLE | |
|-------------|--------------------|---------------------------------------|--------------------------|
| 製圖 | DRAWN Yoko | TOLERANCE | 品名 13-25 T.S.S |
| 檢圖 | CHECK Jase | .X ±0.2 | 規格 \ROHS COMPLIANT (500) |
| 認定 | APPROVAL Angela | .XX ±0.1 | DATE 12.02.92' |
| | | .XXX ±0.05 | 版次 A-3 |
| | | ANGLE ±5° | DWG.NO. 13-0180 |
| | | 比例 4:1 | |

