

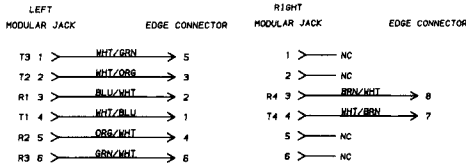

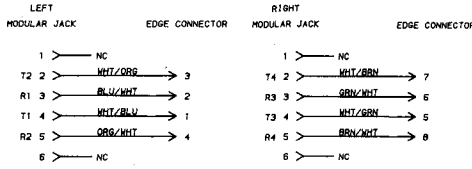













ACO Inserts

ACO Modular Jacks

3.3



Description	Wiring		Figure	Part Number
Single 8-Position Modular Jack	T568A (10BASE-T & Token Ring Compatible)	Unshielded	A	555672-X
		Shielded	B	555643-X
	T568B (10BASE-T & Token Ring Compatible)	Unshielded	C	555621-X
		Shielded	D	555669-X
Single 6-Position Modular Jack	USOC RJ61X	Unshielded	E	555625-X
	RJ11/RJ14/RJ25 Compatible	Unshielded	F	555611-X
Dual 6-Position Modular Jack	2-Pair/2-Pair	Unshielded	G	555614-X
	3-Pair/1-Pair	Unshielded	H	555617-X

X denotes faceplate color: -1 = Almond, -3 = Black, -4 = Gray, -5 = White, -6 = Electrical Ivory

OUTLETS, FACEPLATES AND ACCESSORIES