Part Number: 560123-0300
Status: Active
Overview: DuraClik™ Connector System
Description: DuraClik™ ISL Wire-to-Board Receptacle Housing, Single Row, 3 Circuits

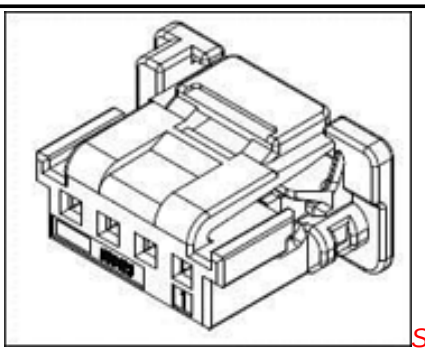

Series
image - Reference only

Documents:
Drawing (PDF)
Product Specification PS-560123-002 (PDF)
Packaging Specification PK-560123-001 (PDF)
RoHS Certificate of Compliance (PDF)

General

Product Family	Crimp Housings
Series	560123
Application	Signal, Wire-to-Board
Overview	DuraClik™ Connector System
Product Name	DuraClik™
UPC	889056009539

Physical

Circuits (maximum)	3
Color - Resin	Natural
Gender	Receptacle
Glow-Wire Compliant	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Resin	PBT
Net Weight	0.219/g
Number of Rows	1
Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface	2.00mm
Polarized to Mating Part	Yes
Ports	3
Stackable	No
Temperature Range - Operating	-40°C to +125°C

Electrical

Current - Maximum per Contact	3A

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-560123-001
Product Specification	PS-560123-002, RPS-560123-001
Sales Drawing	SD-560123-003, SD-560124-001

EU RoHS
ELV and RoHS Compliant
REACH SVHC
Contains SVHC: No
Low-Halogen Status
Not Low-Halogen

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.

Search Parts in this Series
560123Series

Mates With
502352 Right-Angle DuraClik™ Wire-to-Board Header, 560020 Vertical DuraClik™ Wire-to-Board Header

Use With
560124-0101 DuraClik™ ISL Terminal