

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [5601230801](#)  
**Status:** **Active**  
**Overview:** [DuraClik Connector System](#)  
**Description:** [DuraClik ISL Wire-to-Board Receptacle Housing, Single Row, Black, 8 Circuits](#)

**Documents:**

<a href="#">3D Model</a>	<a href="#">Packaging Specification PK-560123-001-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Test Summary 5601230400-TS (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Test Summary 5601230600-TS (PDF)</a>
<a href="#">Product Specification PS-560123-001-001 (PDF)</a>	<a href="#">Datasheet (PDF)</a>
<a href="#">Product Specification PS-560123-003-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Application Specification AS-560123-001-001 (PDF)</a>	

**General**

Product Family	Crimp Housings
Series	<a href="#">560123</a>
Application	Automotive, Signal, Wire-to-Board
Overview	<a href="#">DuraClik Connector System</a>
Product Name	DuraClik
UPC	889056288262


**Physical**

Circuits (maximum)	8
Color - Resin	Black
Gender	Receptacle
Glow-Wire Capable	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Resin	PBT
Net Weight	0.455/g
Number of Rows	1
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface	2.00mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40° to +130°C

**Material Info**

**Reference - Drawing Numbers**

Application Specification	AS-560123-001-001
Packaging Specification	PK-560123-001-001
Product Specification	PS-560123-001-001, PS-560123-003-001
Sales Drawing	SD-560123-005-001
Test Summary	5601230400-TS, 5601230600-TS

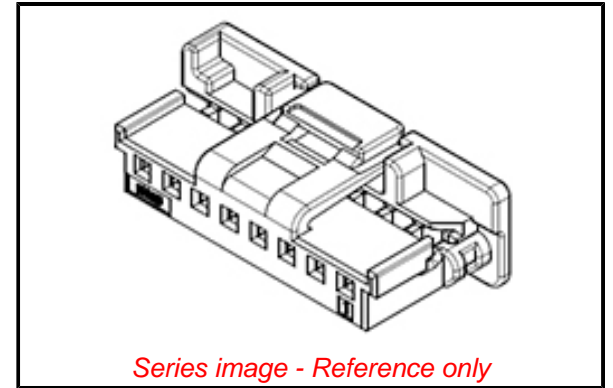

**EU ELV**

**Compliant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2020)4578-DC (25  
June 2020)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Compliant

Not Contained

**Search Parts in this Series**

[560123 Series](#)

**Mates With**

DuraClik Right-Angle Header [502352](#) <br>  
DuraClik Vertical Header [560020](#)

**Use With**

DuraClik ISL Terminal [560124](#) <br>DuraClik  
ISL Retainer [5601250800](#)