


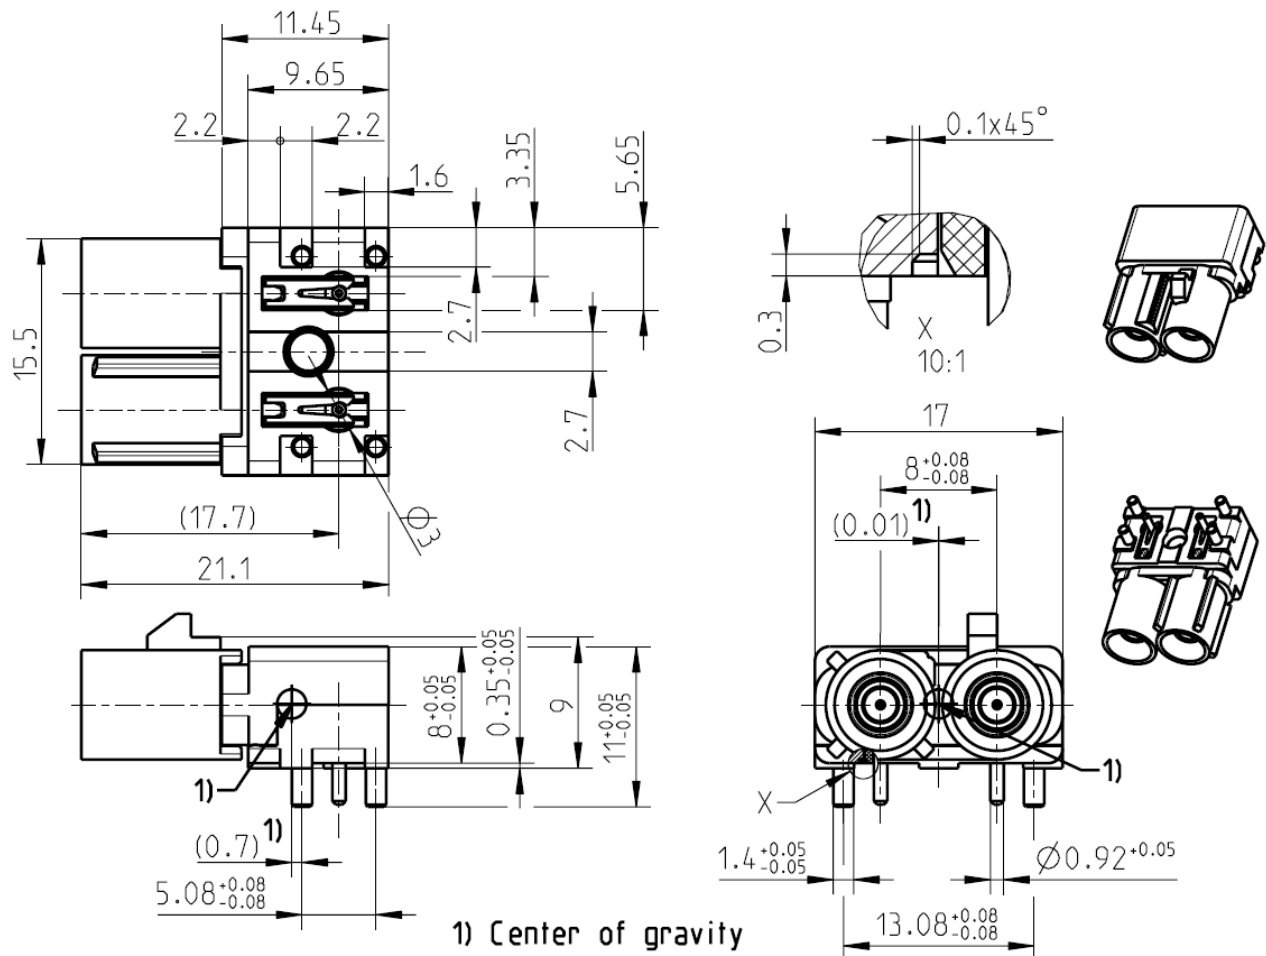

All dimensions are in mm; tolerances according to ISO 2768 m-H

Y = Part number has to be accomplished by codification

Interface

According to

DIN 72594-1

Documents

Assembly instruction

MA_59V054

PCB layout

MB_187

Tape & reel packaging

VG_75.20000

Material and plating

Connector parts

Center contact

Outer contact

Body

Dielectric

Housing

Material

Brass

Zinc alloy

Zinc alloy

PA 6.6T

PA 6T/66

Plating

AuroDur®, gold plated

Nickel, 2.5-5 µm

Tin, 2-5 µm, over Nickel 1-5µm

Electrical data

Impedance	50 Ω
Frequency	DC to 6GHz
Return loss measured on 50 Ω footprint	$\geq 24\text{dB}$ (DC to 2,4GHz) $\geq 16\text{dB}$ (2,4GHz to 4GHz)
Insertion loss	$\leq 0.1 \times \sqrt{f(\text{GHz})}$ dB
Insulation resistance	$\geq 1 \times 10^3 \text{ M}\Omega$
Center contact resistance	$\leq 5 \text{ m}\Omega$
Outer contact resistance	$\leq 5 \text{ m}\Omega$
Test voltage	750 V rms
Working voltage	335 V rms
Power current	$\leq 1 \text{ A DC}$

- Connector only, VSWR in application depends decisive on PCB layout -

Mechanical data

Mating cycles	≥ 25
Engagement force	$\leq 25 \text{ N}$
Disengagement force	$\geq 2 \text{ N}$
Retention force plastic housing	$\geq 110 \text{ N}$
Coding efficiency	$\geq 40 \text{ N}$

Environmental data

Temperature range	-40°C to 105°C
Thermal shock	DIN 72594-2 clause 6.2
Temperature and humidity	DIN 72594-2 clause 6.3
Vibration and mechanical shock	DIN 72594-2 clause 6.1
Dry heat	DIN 72594-2 clause 6.4
Soldering profile	acc. IEC 60068-2-58 group 3&4
2002/95/EC (RoHS)	compliant

Tooling

N/A

Packing

Standard	50 pcs. in blister tray, 200 pcs. on tape and reel
Weight	9.8 g/pce

Coding

Coding		Color	RAL	Part-Number
	A	black	sim. 9005	59S2AA-400A5-A
	B	white	sim. 9001	59S2AA-400A5-B
	C	blue	sim. 5005	59S2AA-400A5-C
	D	bordeauxviolet	sim. 4004	59S2AA-400A5-D
	E	green	sim. 6002	59S2AA-400A5-E
	F	brown	sim. 8011	59S2AA-400A5-F
	G	grey	sim. 7031	59S2AA-400A5-G
	H	violet	sim. 4003	59S2AA-400A5-H
	I	beige	sim. 1001	59S2AA-400A5-I
	K	curry	sim. 1027	59S2AA-400A5-K
	Z	waterblue	sim. 5021	59S2AA-400A5-Z

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Thomas Höfling	13/06/07	Thomas Höfling	07/05/12	i00	12-0397	A.Kott	07/05/12
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de					Tel.: +49 8684 18-0 Fax: +49 8684 18-499 email: info@rosenberger.de		Page 3 / 3