
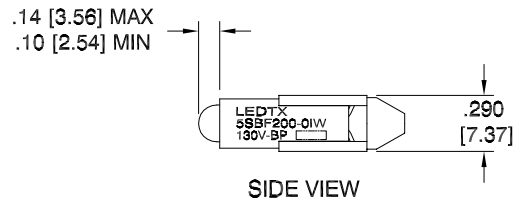
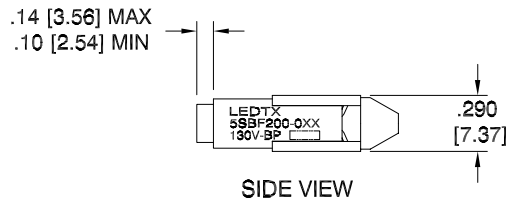
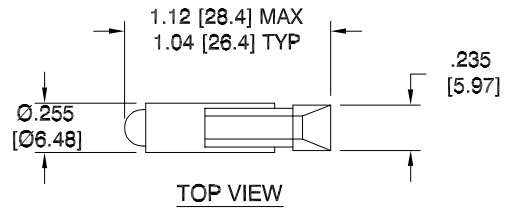


LTR	REVISION	DATE	APPD
B	052018-GP01: UPDATED TEST DATA	06-28-18	GP

**5SBF200-0IW-130B**

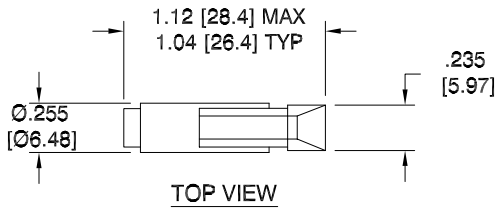

**NOTES:**

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: RYNITE
3. BASE MATERIAL: WEDGE = BAKELITE RESIN MELTS AT 200°C  
FLANGE = NICKEL PLATE
4. CONTACT POLARITY: BipolarDC (+ / -)
5. OPERATING TEMPERATURE: ~-30°C to ~+50°C

REVISION NOTIFICATION	
<input type="checkbox"/> DLC	
<input type="checkbox"/> UL/ETL	
<input type="checkbox"/> MADE IN USA	
<input type="checkbox"/> CUSTOMER _____	
<input type="checkbox"/> OTHER	
REDLINE CHECKLIST	
<input type="checkbox"/> REDLINE(YES)	
<input type="checkbox"/> DATE: _____	
<input type="checkbox"/> INITIATED BY: _____	
<input type="checkbox"/> ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>	
<input type="checkbox"/> WORK ORDER# _____	

**ELECTRICAL - OPTICAL CHARACTERISTICS (Ta = 25°C)**

5SBF200-0AG-130B	AQUA GREEN	130Vdc	0.65 W	0.005 A	0.450cd	519	-	80°
5SBF200-0ER-130B	SUPER RED	130Vdc	0.65 W	0.005 A	0.225cd	637	-	85°
5SBF200-0IW-130B	WARM WHITE	130Vdc	0.69 W	0.005 A	0.504cd		3000K	105°
5SBF200-0UY-130B	SUPER YELLOW	130Vdc	0.65 W	0.005 A	0.090cd	596	-	76°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λP nm	COLOR TEMP. (K)	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

**LED<sup>®</sup>**  
LEDTRONICS,™ INC.  
23105 KASHIWA COURT  
TORRANCE, CA 90505

**-PROPRIETARY-**  
This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5  
.XX ± .025 (UNLESS OTHERWISE STATED)  
ANGLES ± 0°,30'  
FRACT. ± 1/32

TITLE							
<b>5SBF200-0XX-130B</b>							
DWG NO	SCALE	SHEET	DATE				
5SBF200-130V-BP	1:1	1 OF 1	10-07-09				
CODE IDENT NO.	DWG BY	CHK BY	QA	MFG	R&D		
8Z410	MM 10-07-09		EE 06-29-18	LD 06-29-18	KS 06-29-18		