
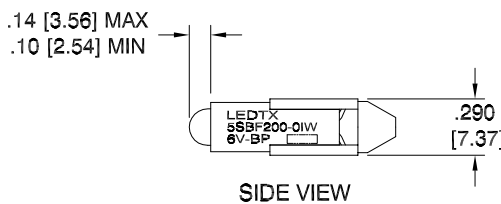
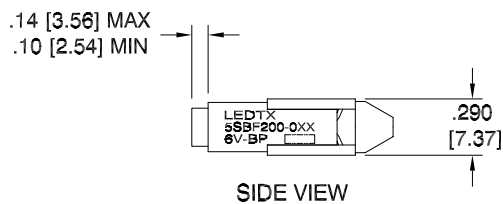
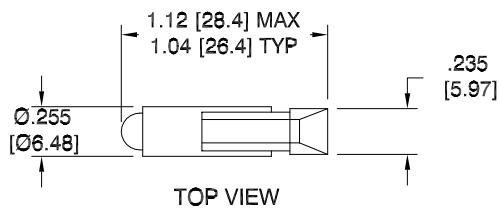


LTR	REVISION	DATE	APPD
A	052018-GP01: ADDED P/N's & UPDATED TEST DATA	06-21-18	GP

5SBF200-0IW-006B

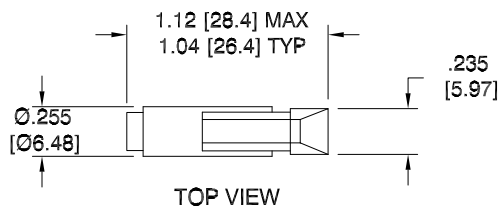

NOTES:

- ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
- SLEEVE MATERIAL: RYNITE
- BASE MATERIAL: WEDGE = BAKELITE RESIN MELTS AT 200°C
FLANGE = NICKEL PLATE
- CONTACT POLARITY: BipolarDC (+ / -)
- REPLACES INCANDESCENT: 6PSB
- OPERATING TEMPERATURE: ~-30°C to ~+50°C

REVISION NOTIFICATION	
<input type="checkbox"/> DLC	
<input type="checkbox"/> UL/ETL	
<input type="checkbox"/> MADE IN USA	
<input type="checkbox"/> CUSTOMER _____	
<input type="checkbox"/> OTHER	
REDLINE CHECKLIST	
<input type="checkbox"/> REDLINE(YES)	
<input type="checkbox"/> DATE: _____	
<input type="checkbox"/> INITIATED BY: _____	
<input type="checkbox"/> ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>	
<input type="checkbox"/> WORK ORDER# _____	

ELECTRICAL - OPTICAL CHARACTERISTICS (Ta = 25°C)

5SBF200-0AG-006B	AQUA GREEN	6Vdc	0.12 W	0.020 A	1.800cd	519	-	80°
5SBF200-0CW-006B	COOL WHITE	6Vdc	0.10 W	0.016 A	1.600cd	-	8000K	90°
5SBF200-0IW-006B	WARM WHITE	6Vdc	0.10 W	0.017 A	1.625cd	-	3000K	105°
5SBF200-0UR-006B	ULTRA RED	6Vdc	0.10 W	0.017 A	0.145cd	654	-	95°
5SBF200-0UY-006B	SUPER YELLOW	6Vdc	0.10 W	0.016 A	0.288cd	596	-	76°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λP nm	COLOR TEMP. (K)	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

LEDTRONICS, INC.
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE							
5SBF200-0XX-006B							
DWG NO	SCALE	SHEET	DATE				
5SBF200-6V-BP	1:1	1 OF 1	04-27-18				
CODE IDENT NO.	DWG BY GP	CHK BY	QA EE	MFG LD	R&D KS		
8Z410	04-27-18		06-29-18	06-29-18	06-29-18		