

4



3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	A	INITIAL RELEASE		21 NOV 14	CAS	CAS	

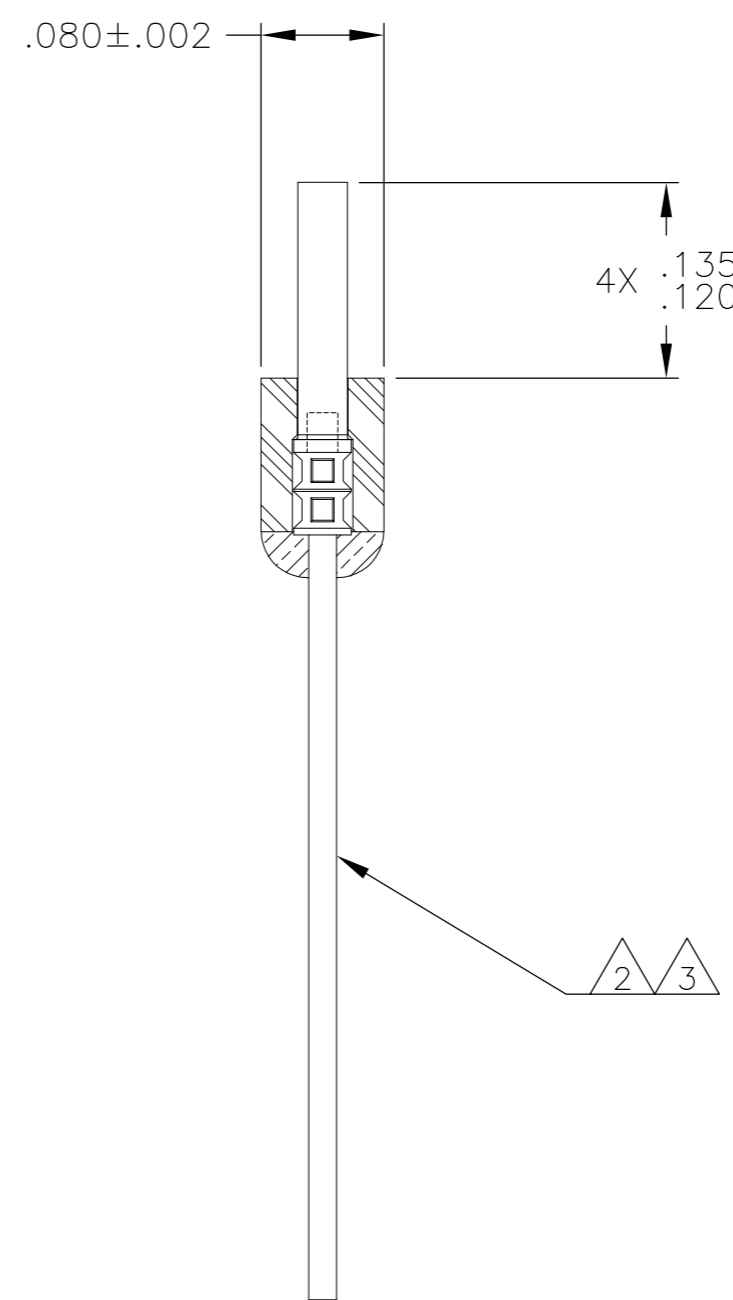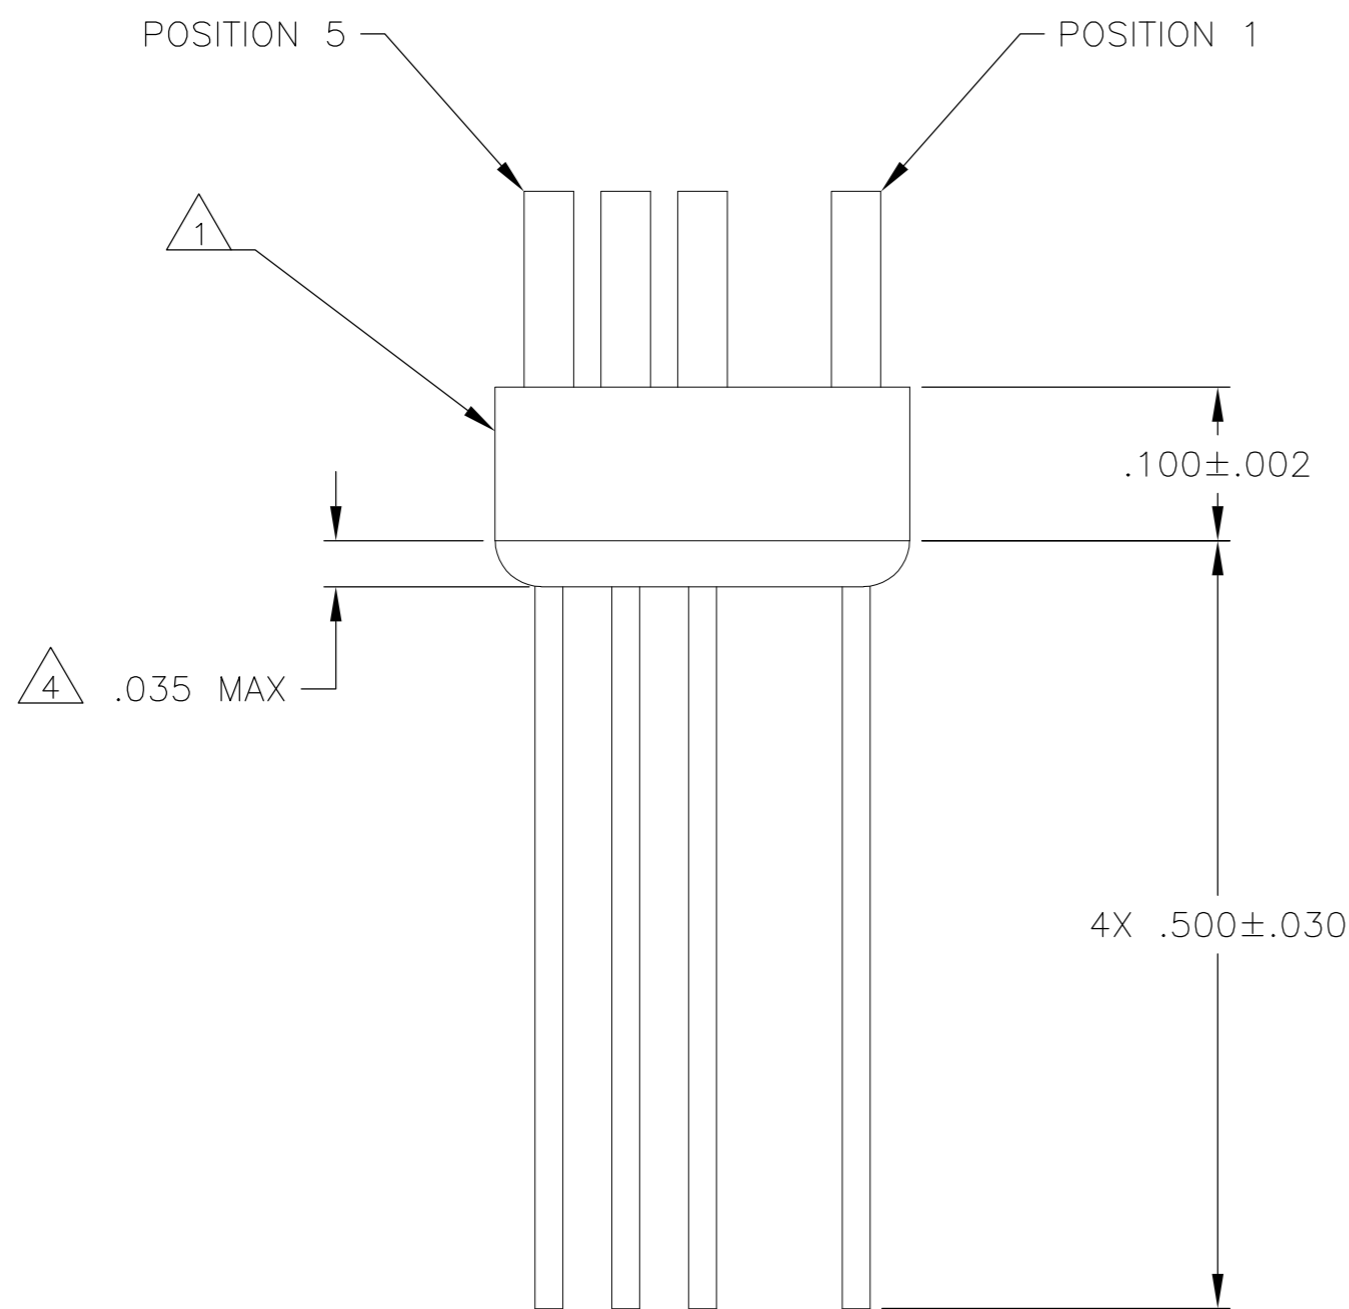

- 1 MATERIAL: DIALL PER MIL-M-14F, TYPE SDG-F
- 2 THIS CONFIGURATION TO BE TERMINATED WITH 25AWG SOLID WIRE, GOLD PLATE OVER NICKEL UNDER PLATE. POSITION 2 TO REMAIN EMPTY.
- 3 CRIMP LEADS INTO PIN CONTACTS PER MEP302-05
- 4 EPOXY: .035 MAX
- 5 REFERENCE BOEING DRAWING 414-4547, REV U

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C SCHOLL	21 NOV 14	TE TE Connectivity	
DIMENSIONS: INCHES		CHK -	APVD -		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± .01 3 PLC ± .005 4 PLC ± - ANGLES ± 2°		PRODUCT SPEC -		APPLICATION SPEC -	
MATERIAL SEE NOTES		FINISH -		WEIGHT -	RESTRICTED TO -
CUSTOMER DRAWING				SCALE 8:1	SHEET 1 of 1
SIZE A2			CAGE CODE 98278	DRAWING NO. 6-1532283-6	REV A

6-1532283-6