



3.1

Category 5e FTP Cable

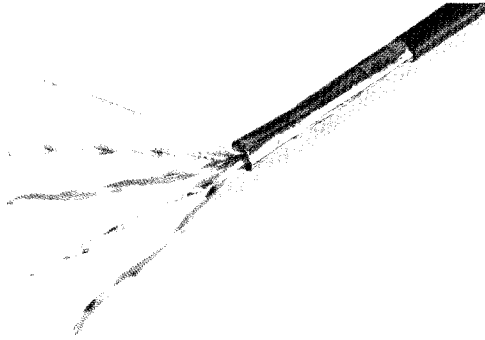


Product Facts

- :: Meets or exceeds TIA/EIA-568-B Enhanced Category 5 and ISO 11801: 2002 Class D specifications
- :: Independently verified by Intertek ETL SEMKO testing services
- :: UL & cUL Listed (CMR/CMP)
- :: Exceeds all requirements for Gigabit Ethernet
- :: 24 AWG, solid conductors



UL/NEC Ratings	Pair Count	Package	Part Number				Weight lbs/kft	Vp (%nom)	Dimensions (in)	
			White	Gray	Blue	Violet			Dielectric	Outside
CMR	4	WR	-	1499171-3	1499171-5	1-1499171-7	31	72	0.041	0.219
CMP	4	WR	1499172-1	1499172-3	1499172-5	-	29	72	0.042	0.240

Category 5E UTP Cable (350 MHz)



Product Facts

- :: Meets or exceeds TIA/EIA-568-B Enhanced Category 5 and ISO Class D 11801:2002 specifications
- :: Independently verified by Intertek ETL SEMKO testing services
- :: Performance characterized to 350 MHz
- :: 5 dB NEXT performance above Category 5e
- :: UL & cUL listed (CMR/CMP)
- :: Gigabit Ethernet zero bit error rate independently certified by Intertek ETL SEMKO
- :: Lead-free jacketing
- :: 24 AWG, solid conductors



UL/NEC Ratings	Pair Count	Package	Part Number				Weight lb/kft	Vp (%nom)	Dimension (in)	
			White	Gray	Blue	Yellow			Dielectric	Outside
CMR	4	RB	57826-2	57826-4	57826-6	57826-8	24	70	0.037	0.20
		WR	57826-1	57826-3	57826-5	57826-7				
		PB	6-57826-2	6-57826-4	6-57826-6	6-57826-8				
CMP	4	RB	57825-2	57825-4	57825-6	57825-8	22	74	0.035	0.19
		WR	57825-1	57825-3	57825-5	57825-7				
		PB	6-57825-2	6-57825-4	6-57825-6	6-57825-8				

NOTE: Highlighted part numbers are routinely stocked for shortest lead times.

TWISTED PAIR CABLING

42

For more information, call 1-800-553-0938