

197 Mildly Activated Rosin Flux

General Information

Kester 197 mildly activated rosin flux is a homogeneous solution of high quality purified Grade WW rosin in a specially blended alcohol vehicle into which a very small amount of an extremely effective activating agent has been incorporated. Kester 197 is classified as Type ROL1 flux under IPC ANSI/J-STD-004 Joint Industry Standard. Kester 197, under MIL-F-14256, was QPL approved as Type RMA.

Application

Kester 197 flux has been developed for soldering of critical electronic and electrical assemblies where a more active flux than plain rosin is required but where highly activated fluxes are considered potentially conductive. Kester 197 flux is formulated for foam fluxing applications in automatic wave solder machines. The surface tension has been adjusted so that a low air pressure will produce a very uniform head of small bubbles. This flux can also be applied by dipping, brushing or spraying methods.

Electrical Properties

Kester 197 flux has proven to be nearly as active in fluxing ability as highly activated rosin fluxes, but the flux and its residue are considerably less conductive. The low conductivity results from a minimum of ionic activating agent as shown by the very high water extract resistivity. The rosin residue is non-corrosive, non-conductive and moisture and fungus resistant. The dry rosin residue actually insulates the surface from atmospheric corrosion.

Residue Removal

Since the rosin residue is dry and practically inert after soldering, removal is usually not required. However, if necessary, the rosin residue can be completely removed with Kester 5240 Rosin Residue Remover or 5768 Bio-Kleen Aqueous Saponifier.

Physical Properties

	197 Flux	108 Thinner
Specific gravity @ 75°F (24°C)	0.896 ± 0.005	0.808 ± 0.005
Pounds per gallon	7.48	6.74
Solids content %	37	0.6
Water Extract Resistivity ohm-cm	200,000	---
Flash point (T.O.C.)	65°F (18°C)	65°F (18°C)


Flux Control

During use, the specific gravity of the flux should be checked regularly with a suitable hydrometer to assure that the solids content is maintained at the appropriate level. The evaporated solvent can be replenished by adding Kester 108 Thinner.

The nomograph below provides a quick and reliable method to determine the volume of 108 Thinner to add per gallon of 197 Flux to return the flux to the correct specific gravity.

PROCEDURE

1. Check the specific gravity of the flux with a suitable hydrometer.
2. Check the flux temperature.
3. Place a ruler or straight edge on the nomograph at the specific gravity and temperature. Where the ruler intersects the third graph is the volume of 108 Thinner to add to a gallon (3.8L) of flux.

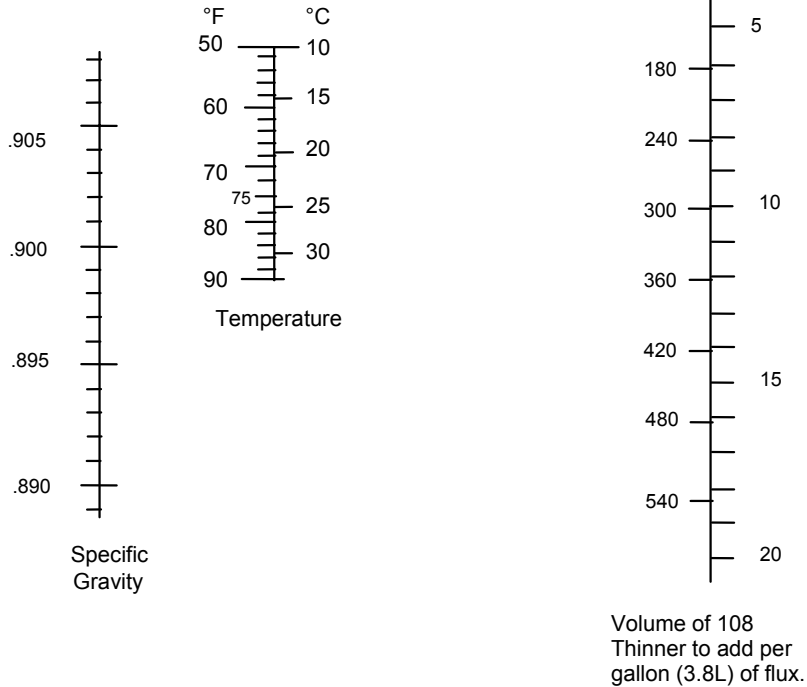

Storage & Shelf Life

Kester 197 is flammable. Store away from sources of ignition. Shelf life is 2 years from the date of manufacture when handled properly and held at 10 - 25°C (50 - 77°F).

Health & Safety

This product, during handling or use, may be hazardous to health or the environment. Read the Material Safety Data Sheet and the label before using this product.

World Headquarters: 800 W. Thorndale Avenue, Itasca, Illinois, 60143 USA
Phone: (+1) 847-297-1600 • **Email:** customerservice@kester.com • **Website:** www.kester.com

Asia Pacific Headquarters
 500 Chai Chee Lane
 Singapore 469024
 (+65) 6449-1133
 customerservice@kester.com.sg

European Headquarters
 Zum Plom 5
 08541 Neuensalz
 Germany
 (+49) 3741 4233-0
 customerservice@kester-eu.com

Japanese Headquarters
 20-11 Yokokawa 2-Chome
 Sumida-Ku
 Tokyo 130-0003 Japan
 (+81) 3-3624-5351
 jpsales@kester.com.sg

The data recommendations presented are based on tests, which we consider reliable. Because Kester has no control over the conditions of use, we disclaim any responsibility connected with the use of any of our products or the information presented. We advise that all chemical products be used only by or under the direction of technically qualified personnel who are aware of the potential hazards involved and the necessity for reasonable care in their handling. The technical information contained herein is consistent with the properties of this material but should not be used in the preparation of specifications as it is intended for reference only. For assistance in preparing specifications, please contact your local Kester office for details.