

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [63811-7200](#)
Status: **Active**
Description: Hand Crimp Tool for Flat Blade Crimp Terminal

Documents:
[RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	Application Tooling
Series	T9999
Comments	Field Repair, See Tooling Specification (PDF) Above
Function	Crimp
Geographic Area	Global
Level of Automation	Manual
More Detailed Tech Information	applicationtooling@molex.com
Product Name	PremiumGrade™
Survey	www.molex.com//review/apptool_survey.html
Tool Type	Handtool
UPC	800756681108

Physical


Net Weight 742.798/g

Material Info

Reference - Drawing Numbers

Application Tooling Documents

ATS-6381172HM, TM-638000029, TM-638000029CN, TM-638000029DE, TM-638000029FR, TM-638000029IT, TM-638000029JP, TM-638000029KR, TM-638000029MY, TM-638000029PL, TM-638000029RU, TM-638000029SK, TM-638000029SP, TM-638000029TH, TM-638000029TW, TM-638000029VN

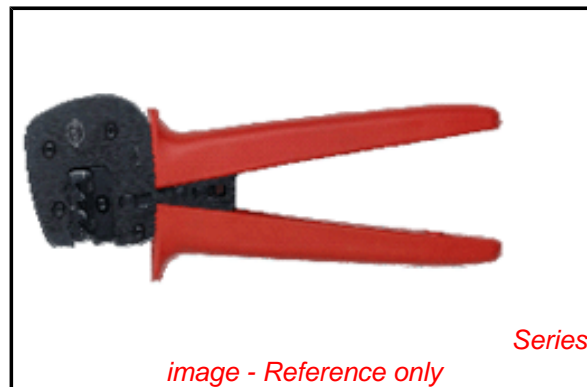

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

T9999Series

Use With

Loose Piece Terminals

Application Tooling | **FAQ**

Description	Product #
Sabre™ Crimp Terminal, Female, 14-16 AWG, 0.79mm max. Insulation Diameter, Reel Packaged, Tin (Sn) Plated Brass Contact without TPA	0433740001
Sabre™ Crimp Terminal, Male, 18 AWG, 3.30mm Max. Insulation Diameter, Reel Packaged, Tin (Sn) Plated Brass Contact	0431781002
Sabre™ Crimp Terminal, Male, 18 AWG, 3.30mm Max. Insulation Diameter, Reel Packaged, Tin (Sn) Plated Brass Contact	0431785002

AWG, 3.30mm Max.
Insulation Diameter,
Reel Packaged,
Tin (Sn) Plated
Brass Contact, Last-
Make Wipe Length,
complies with the
UL1977 finger proof
access requirement
Sabre™ Crimp 0433750001
Terminal, Female,
14-16 AWG, 3.30mm
max. Insulation
Diameter, Reel
Packaged, Tin (Sn)
Plated Brass Contact
with TPA

This document was generated on 04/30/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION