

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [63813-0600](#)  
**Status:** **Active**  
**Description:** Manual Activation and Deactivation Tool

**Documents:**  
[RoHS Certificate of Compliance \(PDF\)](#)

**General**


Product Family	Application Tooling
Series	T9999
Function	Activation, Deactivation
Geographic Area	Global
Level of Automation	Manual
More Detailed Tech Information	<a href="mailto:applicationtooling@molex.com">applicationtooling@molex.com</a>
Product Name	N/A
Survey	<a href="http://www.molex.com//review/apptool_survey.html">www.molex.com//review/apptool_survey.html</a>
Tool Type	Handtool
UPC	800753891920

**Material Info**

**Reference - Drawing Numbers**

Application Tooling Documents

ATS-638130600, TM-638000029, TM-638000029CN, TM-638000029DE, TM-638000029FR, TM-638000029IT, TM-638000029JP, TM-638000029KR, TM-638000029MY, TM-638000029PL, TM-638000029RU, TM-638000029SK, TM-638000029SP, TM-638000029TH, TM-638000029TW, TM-638000029VN

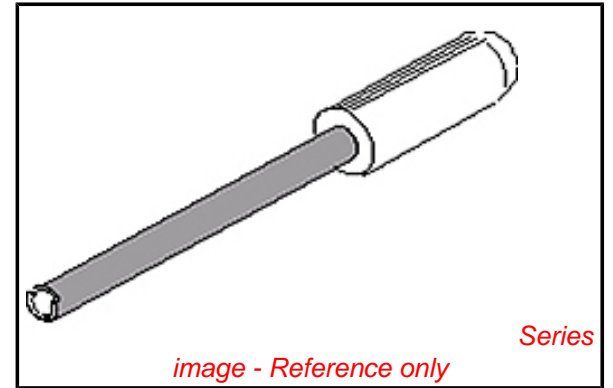

**EU RoHS**

**ELV and RoHS Compliant**

**REACH SVHC**

Not Reviewed

**Low-Halogen Status**

Not Reviewed

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

T9999Series

**Application Tooling Description**

**FAQ Product #**

Sabre™ Crimp Terminal, Male, 18 AWG, 3.30mm Max. Insulation Diameter, Reel Packaged, Tin (Sn) Plated Brass Contact	0431781002
Sabre™ Crimp Terminal, Male, 18 AWG, 3.30mm Max. Insulation Diameter, Reel Packaged, Tin (Sn) Plated Brass Contact, Last-Make Wipe Length, complies with the UL1977 finger proof access requirement	0431785002
Sabre™ Crimp Terminal, Male,	0431782002

14-16 AWG or  
double 18-20 AWG,  
4.57mm Max.  
Insulation Diameter,  
Reel Packaged, Tin  
(Sn) Plated Brass  
Contact  
Sabre™ Crimp      0431786002  
Terminal, Male,  
14-18 AWG, 4.57mm  
Insulation Diameter,  
Reel Packaged,  
Tin (Sn) Plated  
Brass Contact, Last-  
Make Wipe Length,  
complies with the  
UL1977 finger proof  
access requirement  
Sabre™ Crimp      0431784002  
Terminal, Male,  
18-20 AWG, 3.30mm  
max. Insulation  
Diameter, Reel  
Packaged, Tin (Sn)  
Plated Brass Contact

This document was generated on 04/30/2013

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**