

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [64321-1011](#)  
**Status:** **Active**  
**Overview:** CMC Sealed, Hybrid, Modular Connectors and Headers  
**Description:** .635mm, 1.50mm, 2.80mm, CMC Receptacle, 53 Circuits, Left Wire Output, Black Coding, Mat Sealed

**Documents:**

<a href="#">3D Model</a>	<a href="#">Application Specification AS-98420-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Application Specification AS-98420-001-FR (PDF)</a>
<a href="#">Product Specification PS-64321-001 (PDF)</a>	<a href="#">Application Specification AS-98420-001-SP (PDF)</a>
<a href="#">Application Specification AS-64318-002 (PDF)</a>	<a href="#">Packaging Specification PK-98995-001 (PDF)</a>
<a href="#">Application Specification AS-64318-002-FR (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Application Specification AS-64318-002-SP (PDF)</a>	

**General**

Product Family	Crimp Housings
Series	<a href="#">64321</a>
Application	Power, Wire-to-Board
Application Tooling Part Link	<a href="#">63812-1100</a>
Application Tooling Part Link	<a href="#">63824-1200</a>
Comments	* Current tested on a fully loaded connector, current for temperature increase of 40°C. Current max = 21.0A for 2.80mm Terminal (5.0mm <sup>2</sup> wire), 12.0A for 1.50mm Terminal (2.00mm <sup>2</sup> wire), 2.5A for 0.635mm Terminal (0.75mm <sup>2</sup> wire) *
More Detailed Tech Information	Sealed, high-density, power, modular connecting system for Power Train and Body Electronics applications in cars, trucks, busses
Overview	<a href="#">CMC Sealed, Hybrid, Modular Connectors and Headers</a>
Product Name	CMC
UPC	883906135164

**Physical**


Circuits (maximum)	53
Circuits Detail	5x 2.8mm, 8 x 1.5mm, 40 x 0.635mm terminals
Color - Resin	Black
Gender	Female
Glow-Wire Compliant	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Resin	Polyester
Net Weight	50.860/g
Number of Rows	5
Packaging Type	Carton
Panel Mount	No
Pitch - Mating Interface	2.54mm, 3.50mm, 7.00mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40°C to +125°C

**Electrical**

Current - Maximum per Contact	12A, 2.5A, 21A
-------------------------------	----------------

**Material Info**

**Reference - Drawing Numbers**

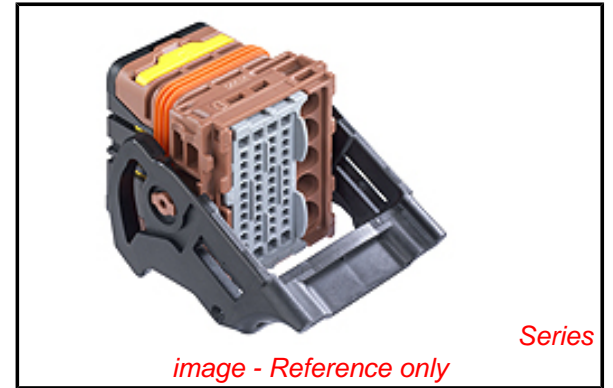

**EU RoHS**

**ELV and RoHS Compliant**  
**REACH SVHC**  
 Not Reviewed  
**Low-Halogen Status**  
 Not Reviewed

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[64321Series](#)

**Mates With**

[98997-1002](#) 53 Circuit CMC Header

**Use With**

Female Terminals [64322 CP 0.635](#), [64323 CP 1.5](#). Circuit Way Plugs [64325-1010](#), [64325-1023](#), [64325-1091](#). CMC Wire Cap [643211101](#). Header [989971002](#), [64325-1162](#), [64325-1175](#), [64325-1188](#), [64325-1196](#)

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
Unlocking Tool for CMC and	<a href="#">0638241200</a>

Application Specification

Packaging Specification

Product Specification

Sales Drawing

AS-64318-002, AS-64318-002-FR, AS-64318-002-SP,  
AS-98420-001, AS-98420-001-FR, AS-98420-001-SP  
PK-98995-001  
PS-64321-001  
SD-64321-001

CMX Receptacle  
Connector  
Continuity Test Pen 0638121100  
Assembly

This document was generated on 06/24/2013

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**