

6450873-2 ✓ ACTIVE

MULTI-BEAM | MULTI-BEAM XLE

TE Internal #: 6450873-2

Rectangular Power Connectors, Connector Assembly, Receptacle, Board-to-Board, 24 Position, 5.84 mm [.23 in] Centerline, MULTI-BEAM XLE

[View on TE.com >](#)



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Connector Assembly**

Connector & Housing Type: **Receptacle**

Connector System: **Board-to-Board**

Number of Positions: **24**

Centerline (Pitch): **5.84 mm [.23 in]**

Features

Product Type Features

Assembly Requirement	Factory Assembled
Rectangular Power Connector Type	Connector Assembly
Connector & Housing Type	Receptacle
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Mating & Unmating Configuration	Normal
Number of Positions	24
PCB Mount Orientation	Right Angle
Number of Power Positions	24
Number of Rows	1

Body Features

Wire Color (Base)	Black
-------------------	-------

Contact Features



Power Contact Base Material	Tin
Contact Underplating Material Thickness	3.43 μ m
Contact Mating Area Plating Material	Gold Flash over Palladium Nickel
Contact Underplating Material	Nickel
Contact Current Rating (Max)	50 A
Contact Retention Within Housing	Without
Contact Type	Receptacle
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	.076 μ m[2.99 μ in]

Termination Features

Termination Post & Tail Length	3.43 mm[.135 in]
Termination Method to Printed Circuit Board	Through Hole - Solder

Mechanical Attachment

Connector Mounting Type	Board Mount
-------------------------	-------------

Housing Features

Centerline (Pitch)	5.84 mm[.23 in]
Housing Color	Black
Housing Material	High Temperature Thermoplastic

Usage Conditions

Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

UL Flammability Rating	UL 94V-0
Glow Wire Rating	High Temperature Part - Not Glow Wire

Packaging Features

Packaging Method	Tray
------------------	------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC

Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JUNE 2024 (241)

Candidate List Declared Against: JUNE 2024 (241)

Does not contain REACH SVHC

Halogen Content

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 6450813-1
MBXL VERT HDR 24 LP

Also in the Series | MULTI-BEAM XLE



Rectangular Power Connectors(111)

Customers Also Bought




TE Part #1-5177986-4
0.8FH,P06H.5,100,08/Sn,TR,SC



TE Part #5748865-3
AMP III PLUG 25P RA 318 THD IN



TE Part #5-103634-5
06 MTE HDR SRRA LATCH.100CL LF

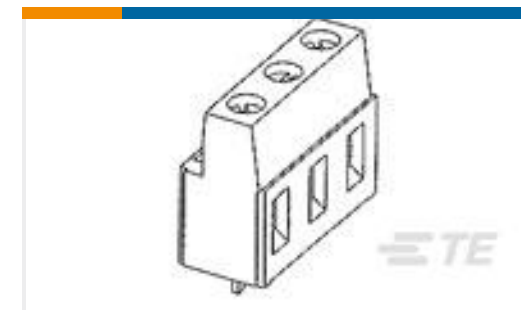


TE Part #282844-3
TERMI-BLOK PCB MOUNT 90 3P.



TE Part #1116503-2
MJ,10MM,8P,SHLD,NOPNL TABS,SN




TE Part #1676301-2
RN 0805 30K9 0.1% 10PPM 1KRL

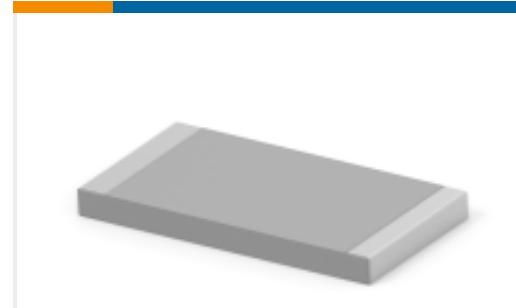


TE Part #5-2176331-5
CRGP 2512 330K 1%



TE Part #4-1419108-2
RTE44012F

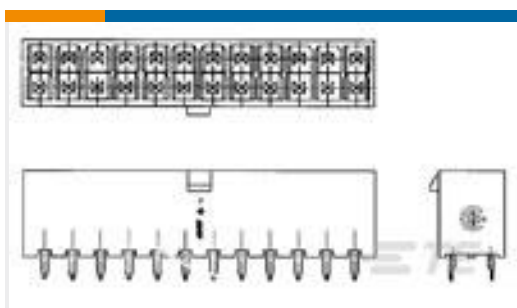

TE Part #1-1586038-2
12P VRT HDR VAL-U-LOK V0



TE Part #6450810-7
MBXL VERT HDR 1LP+32S+1LP

Documents

Product Drawings

[MBXLE R/A REC 48 LP](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_6450873-2_2_c-6450873-2-2.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_6450873-2_2_c-6450873-2-2.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_6450873-2_2_c-6450873-2-2.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications



Application Specification

English