


Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 860060

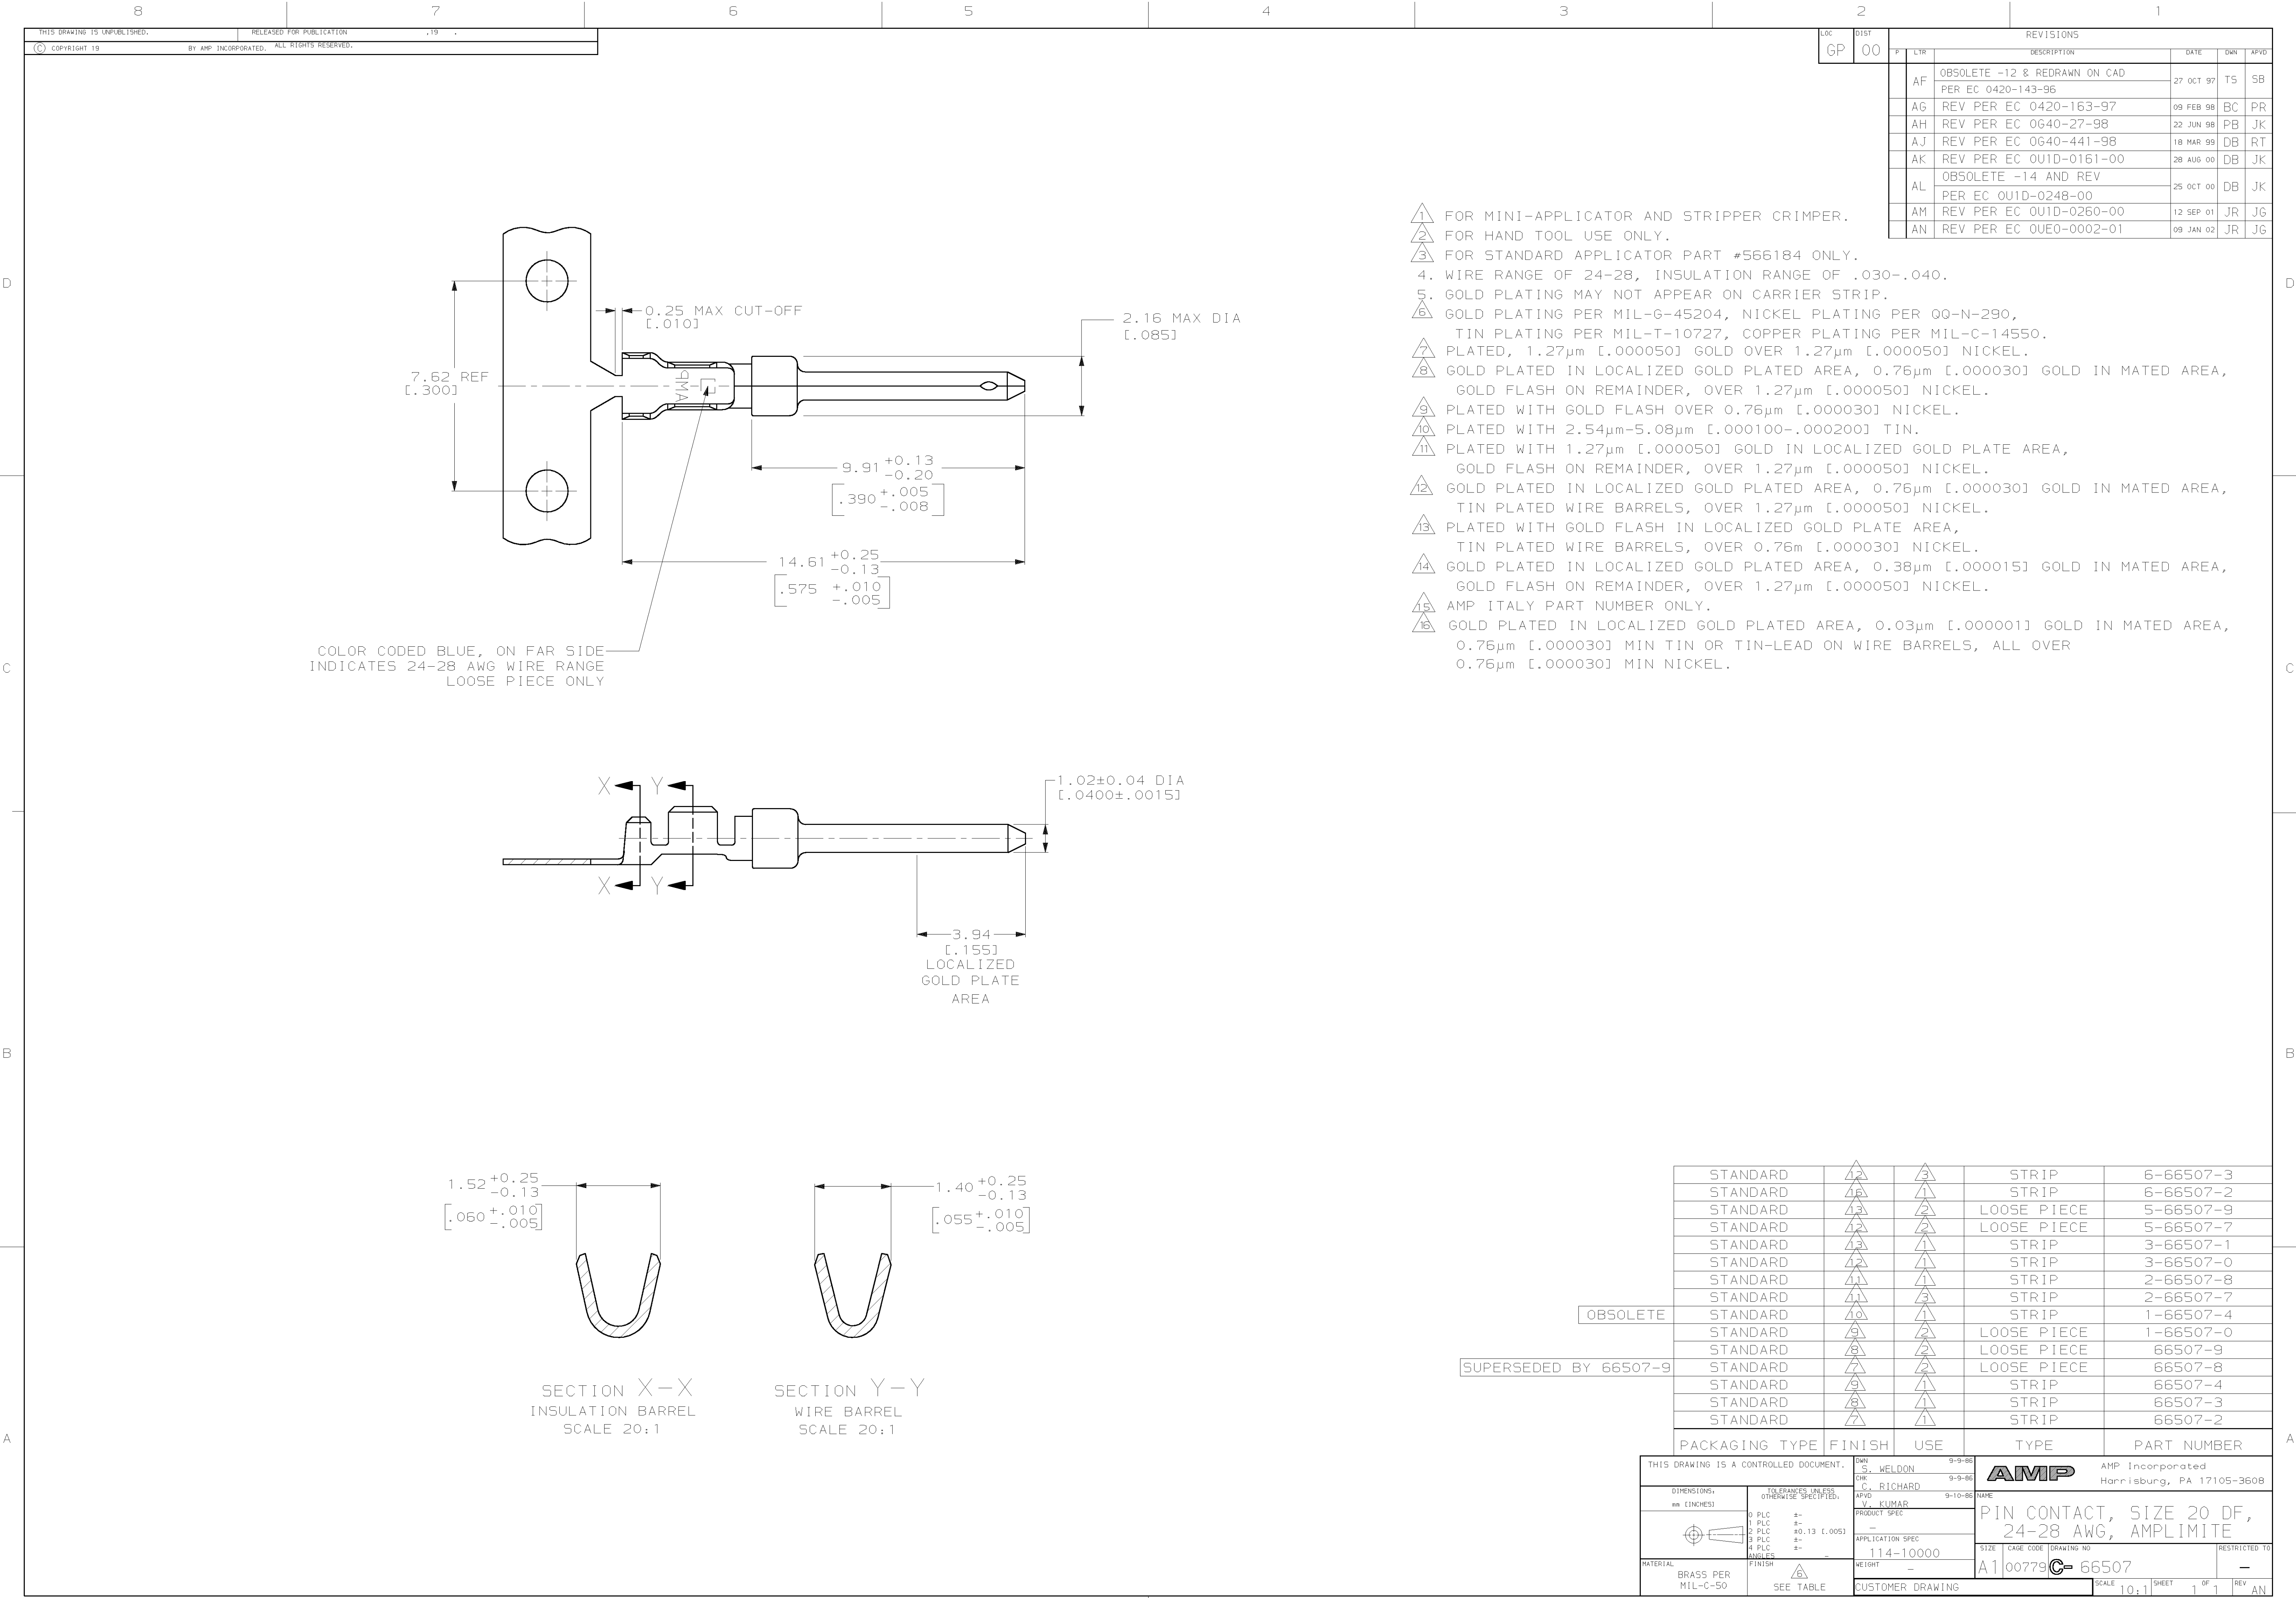

LOC		DIST		REVISIONS				
GP	00	TR	LYR	DESCRIPTION	DATE	OWN	APVD	
		AF		OBsolete -12 & REDRAWN ON CAD PER EC 0420-143-96	27 OCT 97	TS	SB	
		AG		REV PER EC 0420-163-97	09 FEB 98	BC	PR	
		AH		REV PER EC 0640-27-98	22 JUN 98	PB	JK	
		AJ		REV PER EC 0640-441-98	18 MAR 99	DB	RT	
		AK		REV PER EC 0U1D-0161-00	28 AUG 00	DB	JK	
		AL		OBsolete -14 AND REV PER EC 0U1D-0248-00	25 OCT 00	DB	JK	
		AM		REV PER EC 0U1D-0260-00	12 SEP 01	JR	JG	
		AN		REV PER EC 0UEQ-0002-01	09 JAN 02	JR	JG	

- FOR MINI-APPLICATOR AND STRIPPER CRIMPER.
FOR HAND TOOL USE ONLY.
FOR STANDARD APPLICATOR PART #566184 ONLY.
4. WIRE RANGE OF 24-28, INSULATION RANGE OF .030-.040.
5. GOLD PLATING MAY NOT APPEAR ON CARRIER STRIP.
6. GOLD PLATING PER MIL-G-45204, NICKEL PLATING PER QQ-N-290,
TIN PLATING PER MIL-T-10727, COPPER PLATING PER MIL-C-14550.
7. PLATED, 1.27µm [.000050] GOLD OVER 1.27µm [.000050] NICKEL.
8. GOLD PLATED IN LOCALIZED GOLD PLATED AREA, 0.76µm [.000030] GOLD IN MATED AREA,
GOLD FLASH ON REMAINDER, OVER 1.27µm [.000050] NICKEL.
9. PLATED WITH GOLD FLASH OVER 0.76µm [.000030] NICKEL.
10. PLATED WITH 2.54µm-5.08µm [.000100-.000200] TIN.
11. PLATED WITH 1.27µm [.000050] GOLD IN LOCALIZED GOLD PLATE AREA,
GOLD FLASH ON REMAINDER, OVER 1.27µm [.000050] NICKEL.
12. GOLD PLATED IN LOCALIZED GOLD PLATED AREA, 0.76µm [.000030] GOLD IN MATED AREA,
TIN PLATED WIRE BARRELS, OVER 1.27µm [.000050] NICKEL.
13. PLATED WITH GOLD FLASH IN LOCALIZED GOLD PLATE AREA,
TIN PLATED WIRE BARRELS, OVER 0.76µm [.000030] NICKEL.
14. GOLD PLATED IN LOCALIZED GOLD PLATED AREA, 0.38µm [.000015] GOLD IN MATED AREA,
GOLD FLASH ON REMAINDER, OVER 1.27µm [.000050] NICKEL.
15. AMP ITALY PART NUMBER ONLY.
16. GOLD PLATED IN LOCALIZED GOLD PLATED AREA, 0.03µm [.000001] GOLD IN MATED AREA,
0.76µm [.000030] MIN TIN OR TIN-LEAD ON WIRE BARRELS, ALL OVER
0.76µm [.000030] MIN NICKEL.

STANDARD	12	3	STRIP	6-66507-3
STANDARD	16	1	STRIP	6-66507-2
STANDARD	12	2	LOOSE PIECE	5-66507-9
STANDARD	12	2	LOOSE PIECE	5-66507-7
STANDARD	13	1	STRIP	3-66507-1
STANDARD	12	1	STRIP	3-66507-0
STANDARD	11	1	STRIP	2-66507-8
STANDARD	11	3	STRIP	2-66507-7
STANDARD	10	1	STRIP	1-66507-4
STANDARD	9	2	LOOSE PIECE	1-66507-0
STANDARD	8	2	LOOSE PIECE	66507-9
STANDARD	7	2	LOOSE PIECE	66507-8
STANDARD	9	1	STRIP	66507-4
STANDARD	8	1	STRIP	66507-3
STANDARD	7	1	STRIP	66507-2

SUPERSEDED BY 66507-9

PACKAGING TYPE		FINISH	USE	TYPE	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON 9-9-86	AMP Incorporated Harrisburg, PA 17105-3608		
DIMENSIONS: mm (INCHES)		CHK C. RICHARD 9-9-86	AMP Incorporated Harrisburg, PA 17105-3608		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD V. KUMAR 9-10-86	AMP Incorporated Harrisburg, PA 17105-3608		
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES		PRODUCT SPEC - APPLICATION SPEC 114-10000	PIN CONTACT, SIZE 20 DF, 24-28 AWG, AMPLIMITE		
MATERIAL BRASS PER MIL-C-50		FINISH SEE TABLE	SIZE CAGE CODE DRAWING NO RESTRICTED TO		
			A100779C66507		
			CUSTOMER DRAWING		
			SCALE 10:1 SHEET 1 OF 1 REV AN		