


product type designation

C-PLUG

C-plug, removable data storage medium For simple device replacement in case of fault, for recording configuration or configuration and application data, can be used in the following SIMATIC NET products with C-plug slot: SCALANCE XC-200, XP-200, XM-400, XR-500, M-800, W-700, SC-600 and S615

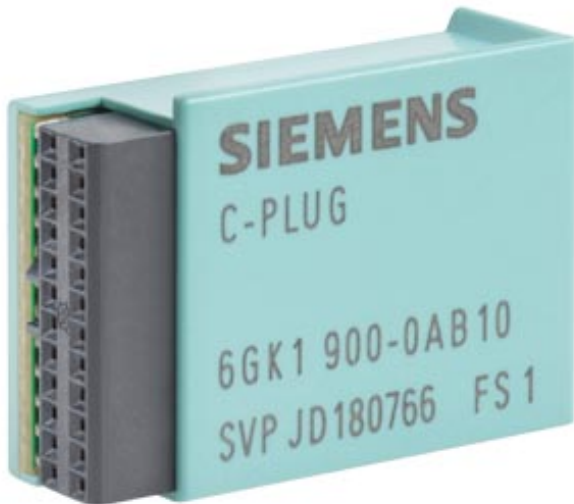

ambient conditions

ambient temperature	
<ul style="list-style-type: none"> during operation 	-40 ... +75 °C
<ul style="list-style-type: none"> during storage 	-40 ... +80 °C
<ul style="list-style-type: none"> during transport 	-40 ... +80 °C
relative humidity	
<ul style="list-style-type: none"> at 25 °C / without condensation / during operation / maximum 	95 %
protection class IP	IP20

design, dimensions and weights

width	24.3 mm
height	17 mm
depth	8.1 mm
net weight	5 g
design of the removable storage	
<ul style="list-style-type: none"> C-PLUG 	Yes
<ul style="list-style-type: none"> KEY-PLUG 	No
product feature / conformal coating	No

product features, product functions, product components / general

storage capacity 256 Mibyte

standards, specifications, approvals

reference code
• according to IEC 81346-2:2019 CFA

further information / internet-Links

Internet-Link

- to website: TIA Selection Tool <http://www.siemens.com/tia-selection-tool>
- to web page: selection aid TIA Selection Tool <http://www.siemens.com/snst>
- to the website: IWLAN <http://www.siemens.com/iwlan>
- to website: Industrial communication <http://www.siemens.com/simatic-net>
- to website: Industry Mall <https://mall.industry.siemens.com>
- to website: Information and Download Center <http://www.siemens.com/industry/infocenter>
- to website: Image database <http://automation.siemens.com/bilddb>
- to website: CAx-Download-Manager <http://www.siemens.com/cax>
- to website: Industry Online Support <https://support.industry.siemens.com>

last modified: 11/23/2020