

M12 D-CODE MALE STRAIGHT 6..8MM

Ethernet CAT5
 Male straight
 M12, 4-pole
 D-coded
 shielded
 Screw terminals
 Sealing range (cable Ø): 6...8 mm

[Link to Product](#)**Illustration**

Product may differ from Image

More Info**Form**

Form 14591

General data

Temperature range -40...+85 °C

Technical Data

Operating voltage	max. 250 V AC/DC
Operating current per contact	max. 4 A
Transfer parameters	CAT5, Class D (ISO/IEC 11801:2002), (EN 50173-1)
Transfer rate	up to 100 Mbit/s full duplex
Coding	M12, D-coded
Connection cross section	max. 0.75 mm ²
Sealing range (cable Ø)	6...8 mm
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated




Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879536639
eClass	27279221
Packaging unit	1

Sketch

The information in this brochure has been compiled with the utmost care.
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 04/21

Male

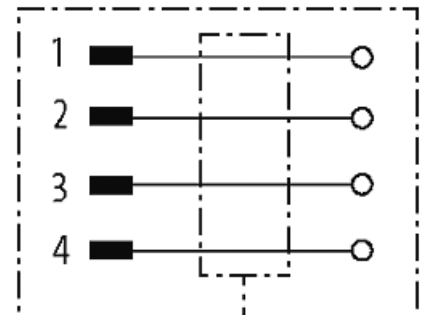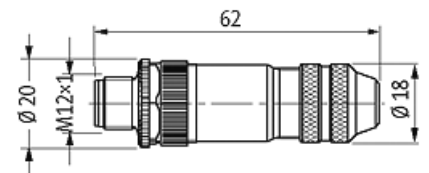

Product may differ from Image