


# Actuator

704.012.418

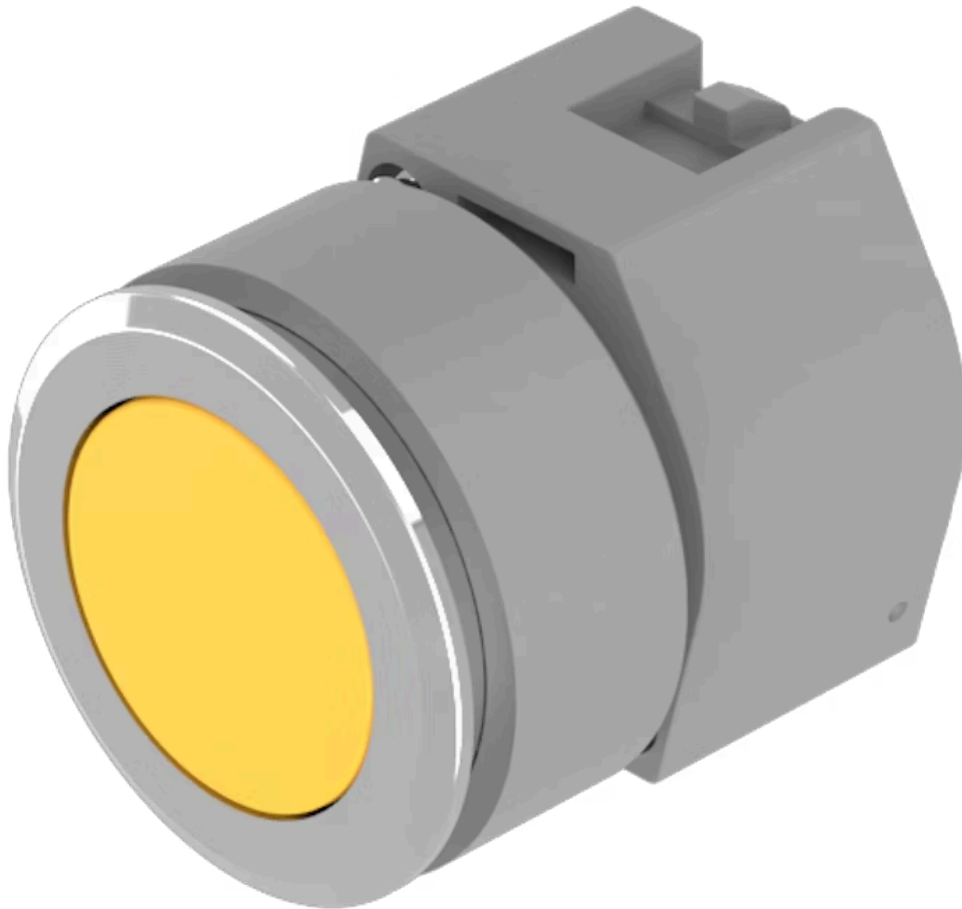

<https://eao.com/p/704.012.418>

Your product:

---



## 704.012.418 Actuator

### FRONT

<b>Front bezel colour:</b>	Nature
<b>Front bezel material:</b>	Aluminium
<b>Front form:</b>	round
<b>Front dimension:</b>	Ø 35 mm

### MOUNTING

<b>Design:</b>	flush
----------------	-------

### OPERATING-/INDICATION PART

<b>Lens shape:</b>	flush
<b>Lens colour:</b>	Yellow
<b>Lens material:</b>	Plastic
<b>Lens optics:</b>	transparent
<b>Lens illumination:</b>	non illuminative

### ELECTRICAL CHARACTERISTICS

<b>Standards:</b>	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
-------------------	---

### MECHANICAL CHARACTERISTIC

<b>Weight:</b>	0.051 kg
<b>Operating Travel:</b>	ca. 5.8 mm ± 0.2 mm
<b>Mechanical lifetime:</b>	≤3 Mio. cycles of operation

**Switching action:** Momentary  
**Operating force:** 8 N

**AMBIENT CONDITION**

**Storage temperature:** - 40 °C ... + 85 °C  
**IP Protection:** IP65 front side  
**Operating temperature:** - 40 °C ... + 55 °C


**OTHER**

**Housing material:** Plastic  
**max. number of switching elements:** 3  
**Housing colour:** Grey


**Short Description:** Actuator, Ø 35 mm, flush, non illuminative, Yellow, Plastic, transparent, round, Nature, Aluminium, anodised, Momentary

**Hints:** Max. 3 switching elements can be clipped on, The colour of anodised aluminium parts can vary due to technical production reasons

**Dimension drawings:**

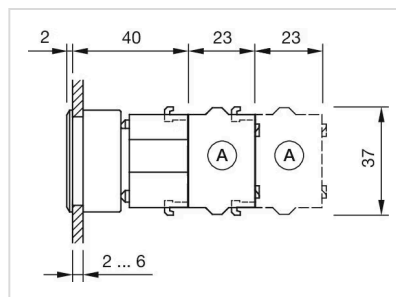

**Wiring diagrams:**

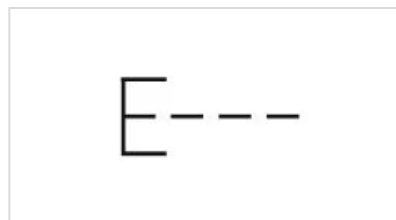

**Mounting cut-outs:**

