

Lamp block

704.950.0



<https://eao.com/p/704.950.0>

Your product:



704.950.0 Lamp block

ELECTRICAL CHARACTERISTICS

Standards: The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1/DIN EN 60947-5-1

MECHANICAL CHARACTERISTIC

Weight: 0.012 kg

Terminal: Screw terminal

Wire cross section: Max. wire cross-section 2 mm x 2.5 mm²
Skinning wire 10 mm
Max. wire cross-section of stranded cable 2 x 1.5 mm²
use stranded wires only with wire end ferrules of 10 mm length
Only one polarity is allowed on each side when wiring.

Switching positions: 2 positions

Tightening torque: Screw terminal 0.5 Nm

AMBIENT CONDITION

Shock resistance: Max. 300 m/s², pulse width 11 ms (sinusoidal EN IEC 60068-2-27)

Operating temperature: - 40 °C ... + 55 °C

Vibration resistance: Max. 100 m / s² from 10 Hz ... 500 Hz, (sinusoidal EN IEC 60068-2-6)

Climate resistance: Relative humidity, max. 95%, non-condensing

Storage temperature: - 40 °C ... + 85 °C

IP Protection: IP00

OTHER


Hints: When using the lamp block, the application guidelines must be observed.

Housing material: Plastic

Short Description:

Lamp block, Plastic, Screw terminal

Wiring diagrams:

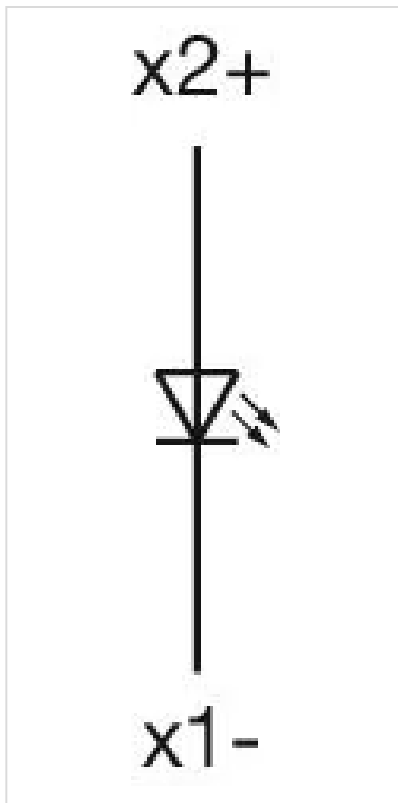

Dimension drawings:

