

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0705550005](#)  
**Status:** **Active**  
**Overview:** [SL Modular Connectors](#)  
**Description:** 2.54mm Pitch SL Header, Single Row, Right Angle, 3.05mm Pocket, Shrouded, with Press-fit Plastic Peg, 6 Circuits, Tin (Sn) Plating

**Documents:**

|  |   |
|--|---|
| <a href="#">3D Model</a>                                 | <a href="#">Product Specification PS-70541-001 (PDF)</a>        |
| <a href="#">3D Model (PDF)</a>                           | <a href="#">Packaging Specification PK-70873-0015-001 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>                            | <a href="#">Test Summary TS-70541-100-001 (PDF)</a>             |
| <a href="#">Product Specification PS-70400-001 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>            |

**Agency Certification**

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**


|                |                                       |
|----------------|---------------------------------------|
| Product Family | PCB Headers                           |
| Series         | <a href="#">70555</a>                 |
| Application    | Signal, Wire-to-Board                 |
| Overview       | <a href="#">SL Modular Connectors</a> |
| Product Name   | SL                                    |
| UPC            | 800753597525                          |

**Physical**

|                                |                                |
|--------------------------------|--------------------------------|
| Breakaway                      | No                             |
| Circuits (Loaded)              | 6                              |
| Circuits (maximum)             | 6                              |
| Color - Resin                  | Black                          |
| Durability (mating cycles max) | 25                             |
| Flammability                   | 94V-0                          |
| Glow-Wire Capable              | No                             |
| Guide to Mating Part           | Yes                            |
| Lock to Mating Part            | Yes                            |
| Material - Metal               | Brass, Phosphor Bronze         |
| Material - Plating Mating      | Tin                            |
| Material - Plating Termination | Tin                            |
| Material - Resin               | High Temperature Thermoplastic |
| Net Weight                     | 1.419/g                        |
| Number of Rows                 | 1                              |
| Orientation                    | Right Angle                    |
| PC Tail Length                 | 3.30mm                         |
| PCB Locator                    | Yes                            |
| PCB Retention                  | Yes                            |
| PCB Thickness - Recommended    | 1.60mm                         |
| Packaging Type                 | Tube                           |
| Pitch - Mating Interface       | 2.54mm                         |
| Plating min - Mating           | 3.810µm                        |
| Plating min - Termination      | 3.810µm                        |
| Polarized to Mating Part       | Yes                            |
| Shrouded                       | Fully                          |
| Stackable                      | No                             |
| Temperature Range - Operating  | -40° to +105°C                 |
| Termination Interface: Style   | Through Hole                   |

**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 3.0A |
|-------------------------------|------|

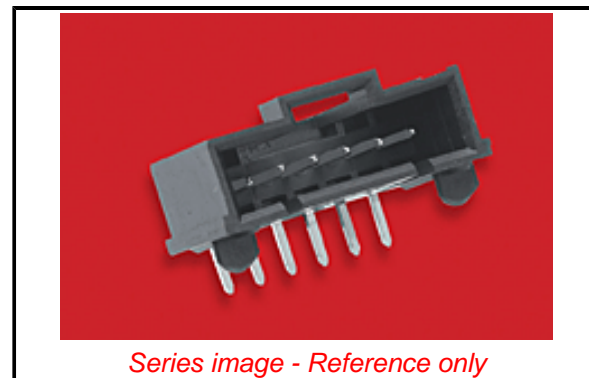

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per - ED/71/2019 (16 July 2019)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

**Search Parts in this Series**

[70555](#) Series

**Mates With**

SL Crimp Housing [70066](#) Option N, [70066](#) Option G, [70430](#) Option G, [70400](#) Option G

Voltage - Maximum 250V

**Solder Process Data**

Duration at Max. Process Temperature (seconds) 003

Lead-free Process Capability WAVE

Max. Cycles at Max. Process Temperature 001

Process Temperature max. C 245

**Material Info**

Engineering Number A-70555-0005

**Reference - Drawing Numbers**

Packaging Specification PK-70873-0015-001

Product Specification PS-70400-001, PS-70541-001

Sales Drawing 705550000-SD-000

Test Summary TS-70541-100-001

This document was generated on 01/18/2020

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**