



ORDERING INFORMATION—Single Shaft Switches

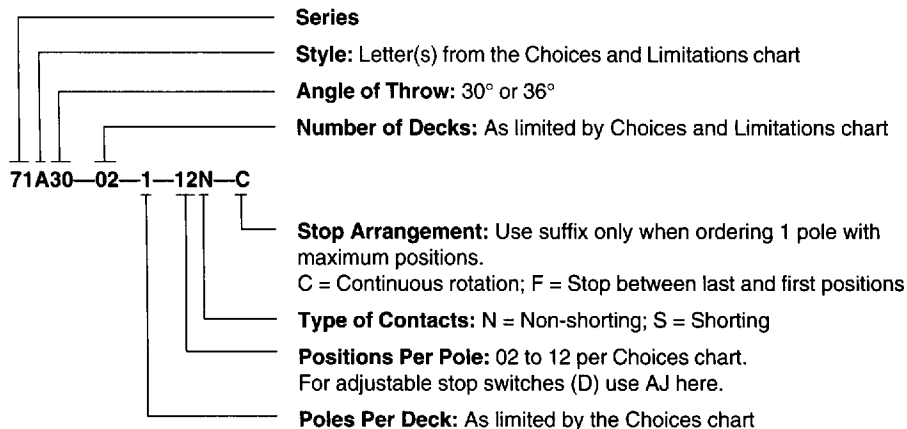

ORDERING INFORMATION—Concentric Shaft Switches

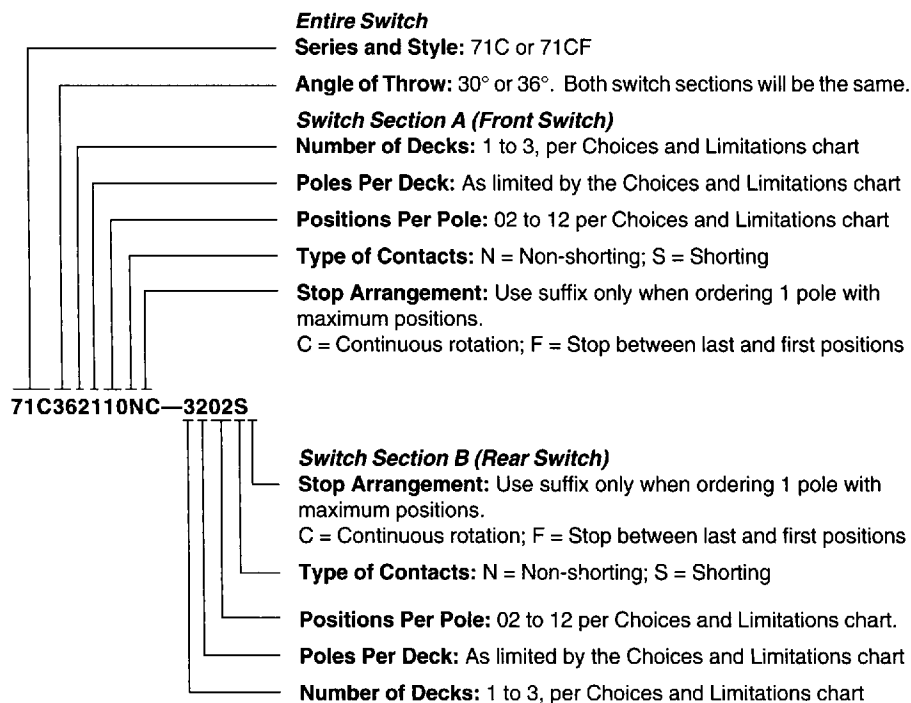


Available from your local Grayhill Distributor
 For prices and discounts, contact a Local Sales Office, an authorized local Distributor, or Grayhill.

ECONOMICAL, 1/4 AMP ROTARY SWITCHES

SERIES 71—CONCENTRIC SHAFTS

FEATURES


- Two Switches in the Panel Space of a Single Shaft Rotary

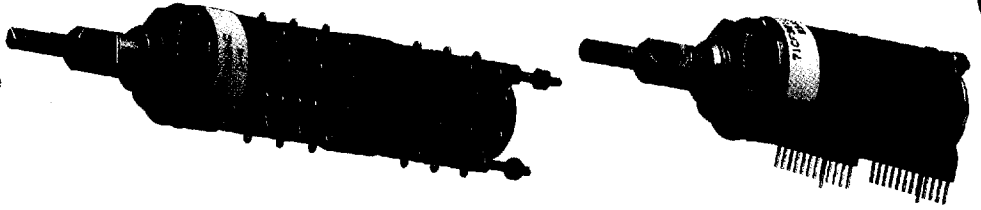

DIMENSIONS

In inches (and millimeters)


Solder Lug Terminals—Style C

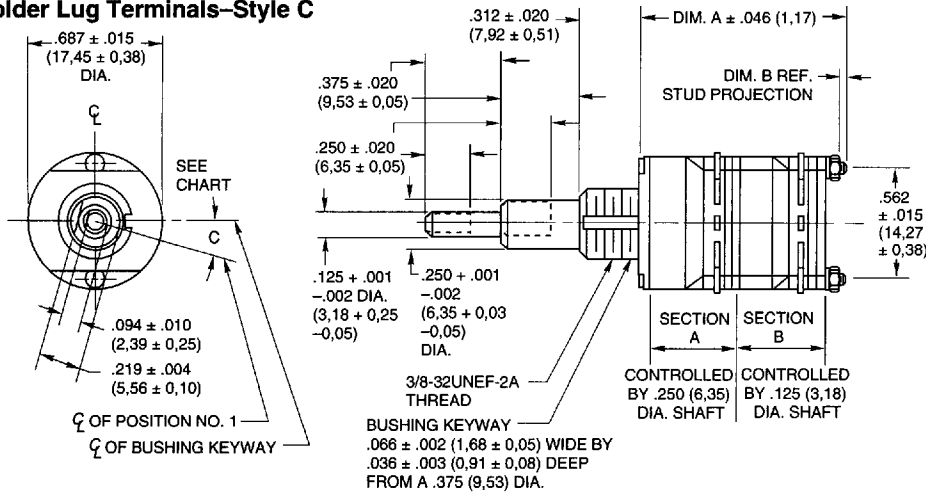


Rear Views

30° and 36° Angle of Throw may be interposed on either shaft diameter.

30° Angle of Throw

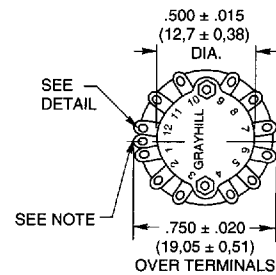


36° Angle of Throw

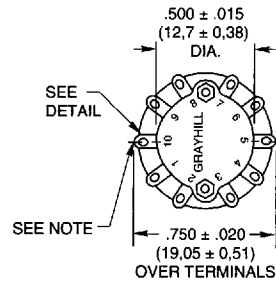

Note: Common location for a single pole per deck switch. For common location on multi-pole switches see circuit diagrams.

No. of Decks		Dimension A	Dimension B	Approx. Weight Grams
Sec. A	Sec. B			
1	1	1.415 (35,94)	.032 (0,81)	24
2	1	1.633 (41,49)	.032 (0,81)	26
3	1	2.131 (54,13)	.312 (7,92)	28
1	2	1.633 (41,49)	.032 (0,81)	26
2	2	2.131 (54,13)	.312 (7,92)	28
3	2	2.349 (59,66)	.312 (7,92)	30
1	3	2.131 (54,13)	.312 (7,92)	28
2	3	2.349 (59,66)	.312 (7,92)	30
3	3	2.567 (65,20)	.312 (7,92)	32

Terminal Detail

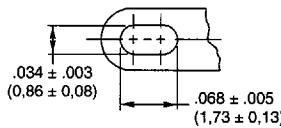

Angle C is 15° in 12 position switches and 36° in 10 position switches.


Grayhill part number and date code marked on detent cover label. Customer part number marked on request.

CIRCUIT DIAGRAMS—Solder Lug Terminals


Switch is Viewed From Shaft End and Shown in Position No. 1.

Note: All common terminals are located above base terminals as shown.

30° Angle of Throw

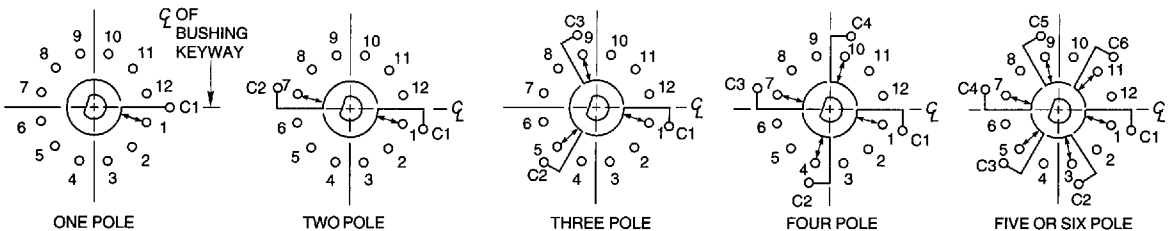

36° Angle of Throw

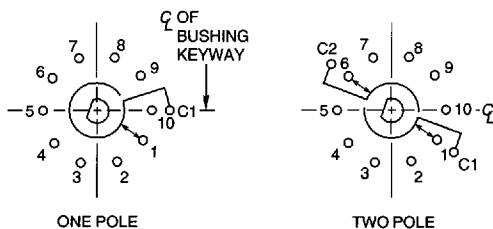

ADD-A-POT SWITCHES

Contact Grayhill for Series 71 Concentric Add-A-Pot or Add-A-Switch type switches.

See pages F-37 through F-42 for specifications, accessories and ordering information.

ECONOMICAL, 1/4 AMP ROTARY SWITCHES

SPECIFICATIONS

Military Qualification MIL-S-3786/39

The military style of the Series 71 rotary switch is qualified to MIL-S-3786/39. Complete electrical rating information is listed on the following page. The Series 71 rotary switch qualification includes the 30° and the 36° angles of throw, in .125" (3,18) and .250" (6,35) diameter shafts, with solder lug terminals and printed circuit terminals, in sealed and unsealed style switches. Standard variations such as shaft and/or bushing length, etc. that do not affect the switch performance can also be marked as qualified product. Contact Grayhill for complete details.

Dimensionally the military style is the same as the standard style with the exception of the PC version of 3 or 4 decks; a spacer deck between decks 2 and 3 adds another deck length to the switch without increasing the number of operative decks.

Another difference in the standard and military styles is the mounting hardware. Ordered as options with a standard style switch these items are included with the military style switch: non-turn washer with solder lug style, and a non-turn washer plus a mounting bushing washer with the PC terminal style.

Complete specification drawings are available from GRAYHILL, Inc. for the standard military qualified products. Military qualified Series 71 rotary switches may be ordered by the "M" number listed in MILITARY Specification Sheet/39 or by GRAYHILL part number. All qualified switches will be marked to the specification.

Military Shaft and Panel Seal

A shaft and panel seal is available to provide water-tight mounting of the Series 71 standard military style rotary switches. Sealing is accomplished by an O-ring shaft seal and a panel seal washer. Panel seal dimension differences are shown in the dimensional drawings. When the panel seal is compressed, dimensions are approximately the same as an unsealed switch. If the non-turn washer supplied with the switch is used, it should not be allowed to extend entirely through the panel when mounting a sealed switch. However, the bushing may be used as a non-turn device instead. Switches are provided with a double flat bushing in styles which include the letter A, and with a bushing which has a keyway in the styles which include the letter B.

SPECIFICATIONS—Materials and Finishes

Materials and Finishes Standard Style

Cover: Diallyl per Mil-M-14 except for 71 BT (see bushing).

Base and Deck Separator: Diallyl per Mil-M-14

Rotor Mounting Plate: Thermoplastic

Bushing: Zinc casting, cadmium plated per ZZ-P-416, Class 2, Type II.

Rear Support Plate: Stainless steel

Shaft, Stop Plates, Stop Arm (71BT):

Reinforced thermoplastic

Shaft, Stop Pins, Stop Arm (All Others):

Stainless steel

Detent Rotor: Reinforced thermoplastic for

71BT; phenolic per MIL-M-14 for all others

Detent Balls: Steel, nickel plated

Detent Springs: Tinned music wire

Rotor Contact: Silver alloy and beryllium

copper

Base Contacts, Common Plate, and

Terminals: Brass, Gold plate .000005"

minimum over Silver plate .00005" over

Nickel .00002".

Front Support Plate (71 BT only):

Tempered steel, tin/lead plated.

Interdeck Seal (71 BT Only): Silicone

Throughbolts and Nuts, and Shaft

Extension: Brass, unplated

Mounting Hardware: One mounting nut and

one internal tooth lockwasher are supplied with

each switch. For switches with A in the style

description, the nut is .062" (1,57) thick by .312"

(7,92) across flats. For switches with B or C in the

style description, the nut is .094" (2,39) thick by

.562" (14,27) across flats. Nuts are brass, cad-

mium plated per QQ-P-416, Class 2, Type II.

Materials and Finishes

Military Qualified

Cover, Base, and Deck Separator: Diallyl per

MIL-M-14

Rotor Mounting Plate: Thermoplastic

Bushing: Zinc, Cadmium plated per QQ-P-416,

Class 2, Type II

Shaft, Shaft Extension, Stop Arm, Stop Pins,

Rear Support Plate Through Bolts and Nuts:

Stainless Steel Passivated

Detent Balls: Steel, Nickel plated

Detent Springs: Tinned Music Wire

Rotor Contact: Silver Alloy and Beryllium

Copper

Base Contacts, Common Plate, and Termi-

nals: Brass, Gold plate .000005" minimum

over Silver plate .00005" over Nickel .00002".

Detent Rotor: Phenolic per MIL-M-14.

Mounting Hardware: One mounting nut and

one internal tooth lockwasher are supplied with

each Series 71 switch. For switches with

Style A in the description, the nut is .062" (1,57)

thick by .312" (7,92) across flats. For switches

with Style B or C in the description, the nut is

.094" (2,39) thick by .562" (14,27) across flats.

Nuts are Brass, Cadmium plated per QQ-P-

416 Class 2, Type II.

Additional Hardware: Each switch is sup-

plied with a non-turn washer to use if desired.

Additionally, each PC mount switch is sup-

plied with a mounting bushing washer (see PC

Mount Accessory). For switches with Style A in

the description, non-turn washer is Stainless

Steel passivated; for switches with Style B in

the description, non-turn washer is Brass, Cad-

mium plated. Mounting bushing washer (PC

Mount Accessory) is Brass, Cadmium plated.

For dimensions of non-turn washers see page

F-40.

SPECIFICATIONS—Electrical Ratings, Others





Electrical Ratings

General

Charts: Charts shown are for non-shorting (break before make) contacts. Measurements were made at 25°C and 68% relative humidity. The load life curves show the number of rotational cycles which can be expected for the voltage, current and type of load. Thus, for a standard style switch with a 300 milliamperere 115 Vac resistive load, the expected life is 15,000 cycles. Reducing the load to 200 milliamperes increases the life to 25,000 cycles. Life limiting or failure criteria are listed in the rating sections which follow.

Cycles: A cycle is a 360° rotation and a return through all switch positions to the starting position.

Voltage: As listed in charts.

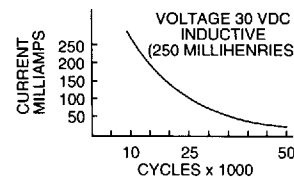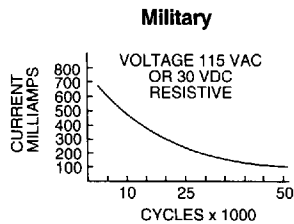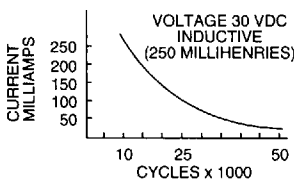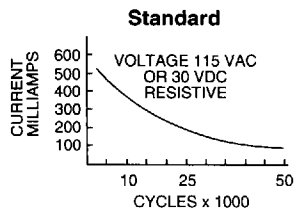

Electrical Ratings

Standard Style

Curves are based on the following failure criteria:
Contact Resistance: 50 milliohms maximum (20 milliohms initially).

Insulation Resistance: 1,000 megohms minimum between terminals and shaft. (50,000 megohms initially).

Voltage Breakdown: 500 Vac minimum between mutually insulated parts.

Current Rating: These switches will carry 4 amperes with a maximum contact temperature rise of 20°C. If the life limiting characteristics are less critical than those shown above, if elevated temperatures or reduced pressures are involved, GRAYHILL can predict the switch life for the application.

Meet the Following Requirements of MIL-S-3786: Moisture Resistance: Medium and High Shock; Vibration (10 to 2,000 cps); Thermal Shock (-65°C to 85°C); Salt Spray, Explosion; and Stop Strength (10 in-lb).

Electrical Ratings

Military Style

Curves are based on the following failure criteria:
Qualified to the following MIL-S-3786/39 circuit values: (also see standard style description.) The Series 71 has been tested to meet the requirements of MIL-S-3786, Style SR39, the majority of which are listed here. At 85°C approximately 68% relative humidity and sea level pressure, the switches have been tested to make and break the following loads, as stated in MIL-S-3786/39: 125 milliamperes at 28 Vdc resistive; 75 milliamperes at 115 Vac resistive.

The switches have also been tested at reduced barometric pressure (70,000 feet), 25°C at approximately 68% relative humidity to make and break the following loads as stated in MIL-S-3786/39: 50 milliamperes, 28 Vdc resistive; 20 milliamperes, 115 Vac resistive. When tested to the above loads at stated conditions, the Series 71 switches meet the following life-limiting criteria after 25,000 cycles of operation in accordance with MIL-S-3786/39.

Contact Resistance: 50 milliohms maximum after life.

Insulation Resistance: 1,000 megohms minimum between terminals and shaft.

Dielectric Strength: 500 Vac (atmospheric pressure) and 350 Vac (reduced pressure) between mutually insulated parts.

The Series 71 also meets the requirements of MIL-S-3786/39 for moisture resistance, stop strength, rotational torque, vibration (10 through 2,000 cps), medium and high shock, salt spray, explosion, thermal shock (-65°C to 85°C), and terminal pull. When tested at sea level, 25°C and 68% relative humidity with failure criteria of 50 milliohms maximum contact resistance and 500 Vac breakdown voltage, these switches will make and break 250 milliamps at 28 Vdc inductive (250 millihenries) 500 milliamps at 28 Vdc resistive; 500 milliamps at 115 volts Vac, 60 hertz resistive, for 10,000 cycles of operation.

Additional Characteristics Standard and Military Styles

Rotational Torque: 4-32 ounce-inches, (28-230 N•mm) depending on the number of poles per deck and the number of decks.

Contacts: Shorting or non-shorting wiping contacts with over 100 grams of contact force.

Shaft Flat Orientation: Opposite first position pole no. 1 (See Circuit Diagrams).

Terminals: Switches are provided with full circle of terminals regardless of the number of active positions.

Extended Studs: Switches of 6 or more decks (or concentric switches of 4 or more) have longer studs and extra stud nuts for recommended double end mounting. Stud hole size is 1/16" diameter for #0-80 NF-2A thread.

Stop Strength: 10 pound-inches.

Mounting Bushing Strength: 10 pound-inches.

STANDARD OPTIONS


Intermixing of shorting/non-shorting, RFI grounding, and shielding.

See pages F-9 and F-10.

ECONOMICAL, 1/4 AMP ROTARY SWITCHES

ADJUSTABLE STOPS

Set and Reset Stops to Limit Rotation Form, Fit, Function Equivalent to Fixed Stop Styles

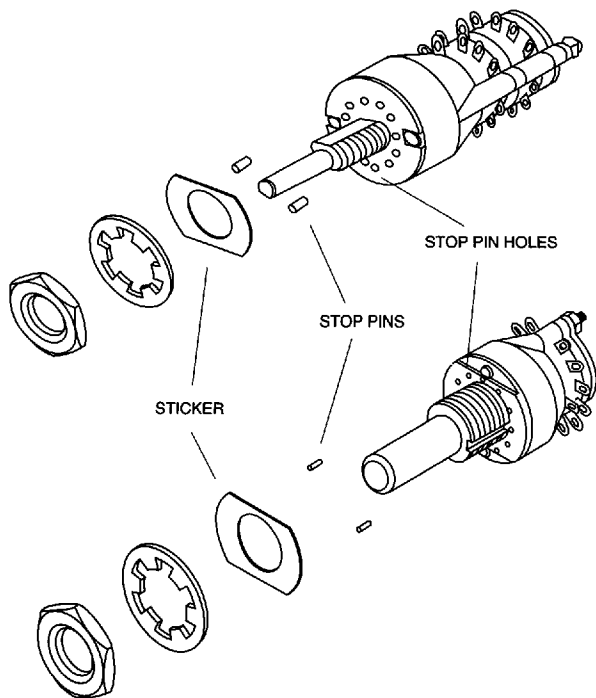

The adjustable stop Series 71 rotary switches allow you to change the number of positions per pole. Simply remove and relocate stop pins in the holes in the front of the switch. The pins are held in place by a self adhesive sticker which fits over the front plate.


This feature is available in the Series 71 single shaft standard switches with either 1/8" or 1/4" diameter shafts with either PC or solder lug terminals. It is not available in military qualified or concentric shaft styles.

All dimensions, ratings and characteristics are the same as the fixed stop equivalent. The chart shown here describes the adjustable stop style substitutions for the fixed stop styles. Although Series 71 is not an exact dimensional equivalent of the fixed stop styles of Series 8 and 9, it most nearly represents a functional substitution.

Fixed Stop Style	Adjustable Stop Substitution
8A	71AD
9A	71AD
71A	71AD
71AF	71ADF
71B	71BD
71BF	71BDF
71E	71ED
71EF	71EDF

For more adjustable stop information, see page F-6. For ordering information, see page F-42.

SHAFT AND PANEL SEAL

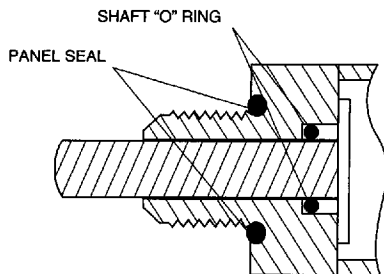

The shaft is sealed by an O-ring inside the bushing. The panel is sealed by an O-ring at the base of the bushing.

The seals do not alter the dimensions as shown in the drawings when the switch is mounted.

The panel seal is silicone rubber. The shaft seal is an O-ring per MIL-P-5516B.

ACCESSORIES FOR 1/4 AMP ROTARY SWITCHES

ACCESSORIES—Non-Turn Washers In inches (and millimeters)


1/8" and 1/4" Diameter Shaft Switches

The bushing of the Series 71 switch is designed so the switch will not turn if the panel has been cut to fit the exact bushing shape. The bushing for the 1/8" diameter shaft switch has a double flat; the 1/4" diameter shaft switch has a keyway in the bushing. An alternate means of keeping the switches from turning is to mount them with optional, non-turn washers.


Part number 50J1066 is made of Stainless Steel. It is supplied with military switches with Style A in the description. When ordered for standard product, a like number of switches must be ordered.

Part number 12C1087-1 is Brass, Cadmium plated and may be ordered for standard product.


Part number SHH694-5 is Stainless Steel washer supplied with all military style switches with Style B in the description.

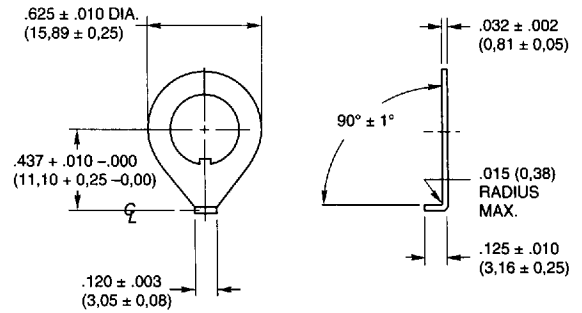

PART NO. 12C1087-1
STANDARD

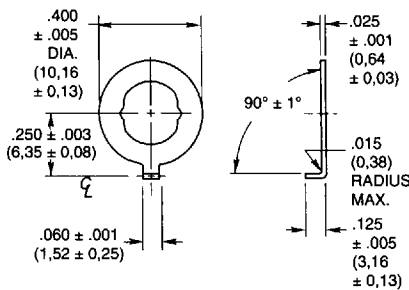

PART NO. 50J1066
MILITARY AND STANDARD
FOR 1/8" DIAMETER SHAFT

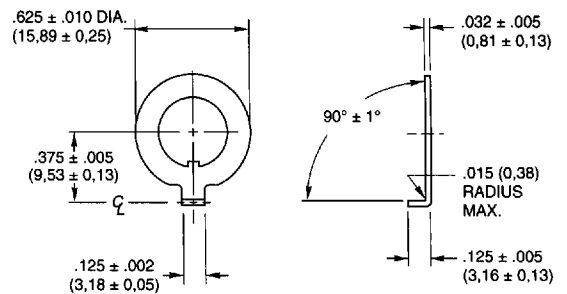

PART NO. SHH694-5
MILITARY
FOR 1/4" DIAMETER SHAFT

4 mm Diameter Shaft Switches


Non-Turn Washer

For styles E, ED, EF and EDF.

Mounting bushing washer provides non-turn feature.

302 Stainless Steel.

Part No. 71 J1103. Contact Grayhill for price.

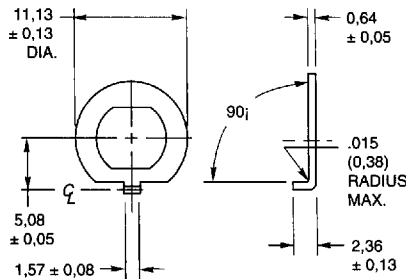

ECONOMICAL, 1/4 AMP ROTARY SWITCHES

CHOICES AND LIMITATIONS—Series 71

A = 1/8" Diameter Shaft

B = 1/4" Diameter Shaft

E = Metric Mount Shaft & Bushing

D = Adjustable Stops

S = Shaft and Panel Seal

F = PC Mount Terminals

T = PC Mount Terminals and Process Sealed Switching Decks & Bushing; no panel seal

M = Military

C = Concentric Shaft

2 Switches with same Style and Angle of Throw, one behind the other.

Limits below apply to either switch section (A or B).

All switches without F or T have solder lugs

Basic Style	Style Choices With S/P Seal	Adj. Stop	Angle of Throw	No. Of Decks	Poles Per Deck	Positions Per Pole ¹	Shorting Or Non-Shorting
A B E	AS BS ES	AD BD ED	30°	01 thru 12 01 thru 08 01 thru 05 01 thru 04 01 thru 03 01 or 02	1 2 3 4 5 ⁵ 6 ⁵	02 thru 12 ³ 02 thru 06 02 thru 04 02 or 03 02 02	N or S N or S N or S N or S N or S N or S
			36°	01 thru 12 01 thru 08	1 2	02 thru 10 ³ 02 thru 05	N or S N or S
AF BF EF	ASF BSF ESF	ADF BDF EDF	30°	01 thru 12 01 thru 08	1 2	02 thru 12 ³ 02 thru 06	N or S N or S
			36°	01 thru 12 01 thru 08	1 2	02 thru 10 ³ 02 thru 05	N or S N or S
BT	—	—	36°	01 thru 05 01 thru 05	1 2	02 thru 10 ³ 02 thru 05	N or S N or S
MA MB	MAS MBS	—	30°	01 thru 05 ⁴ 01 thru 05 ⁴ 01 thru 05 ⁴ 01 thru 04 ⁴ 01 thru 02 ⁴	1 2 3 4 6	02 thru 12 ³ 02 thru 06 02 thru 04 02 or 03 02	N or S N or S N or S N or S N or S
			36°	01 thru 05 ⁴ 01 thru 05 ⁴	1 2	02 thru 10 ³ 02 thru 05	N or S N or S
MAF MBF	MASF MBSF	—	30°	01 thru 04 ^{2,4} 01 thru 04 ^{2,4}	1 2	02 thru 12 ³ 02 thru 06	N or S N or S
			36°	01 thru 04 ^{2,4} 01 thru 04 ^{2,4}	1 2	02 thru 10 ³ 02 thru 05	N or S N or S
C	—	—	30°	01 thru 03 01 thru 03 01 or 02 01 01 01	1 2 3 4 5 6	02 thru 12 ³ 02 thru 06 02 thru 04 02 or 03 02 02	N or S N or S N or S N or S N or S N or S
			36°	01 thru 03 01 thru 03	1 2	02 thru 10 ³ 02 thru 05	N or S N or S
CF	—	—	30°	01 thru 03 01 thru 03	1 2	02 thru 12 ³ 02 thru 06	N or S N or S
			36°	01 thru 03 01 thru 03	1 2	02 thru 10 ³ 02 thru 05	N or S N or S

¹ For Adjustable Stop styles (with the letter D), use AJ instead of number of positions when ordering.

² Military Qualified PC mount switches of 3 or 4 operative decks have an additional spacer deck after deck 2. Use total decks to calculate length;

but use only the number of *operative* decks when creating the part number.

³ For 1-pole switches with maximum positions, specify Fixed stop after last position or Continuous rotation when ordering. (Note: 1 p, 71BT, 10 positions, is available only as Continuous).

⁴ In addition to qualified types (Solder lug—5 decks; PC mount—4 decks), Grayhill can provide switches with additional decks in the materials of the 'M' style. Contact Grayhill.

⁵ Switches in 30° throw with 5 or 6 poles per deck are not available with adjustable stops.