R75MI3120DQ30J

aka 75MI3120DQ30J

Capacitor, film, 0.12 uF, +/-5% Tol, -55/+105C, General Purpose, 400V@85C, Lead Spacing=15 mm

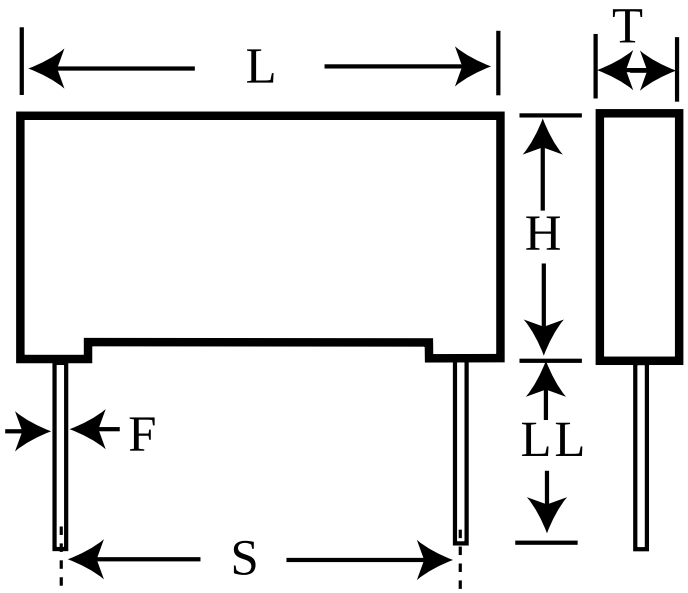

Dimensions (mm)

ID	Dimension	Tolerance
L	18	+0.3
H	12	+0.1
T	6	+0.2
S	15	+/-0.4
LL	18.5	nom
F	0.8	+/-0.05

Specifications

Manufacturer:	KEMET
Capacitance:	0.12 uF
Temperature Range:	-55/+105C
Rated Temperature:	85C
Voltage @ rated temp:	400V
Voltage AC:	220VAC
Tolerance:	+/-5%
Body Type:	Radial Box
Construction:	Wound
Application:	General Purpose
Sub Application:	Pulse
Dissipation Factor @ 1 kHz:	0.05%
Dissipation Factor @ 10 kHz:	0.08%
Insulation Resistance:	100 GOhm
Inductance:	10 nH
Maximum dVdT:	900v/us
Maximum K0:	240000V^2/us
Package Kind:	Ammo
Package Quantity:	680

IntelliData

© 2006-2012 IntelliData.net

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.