


# Data Sheet | Item Number: 787-722

Power supply; Eco; 1-phase; 24 VDC output voltage; 5 A output current; DC-OK LED; 4,00 mm<sup>2</sup>

<https://www.wago.com/787-722>

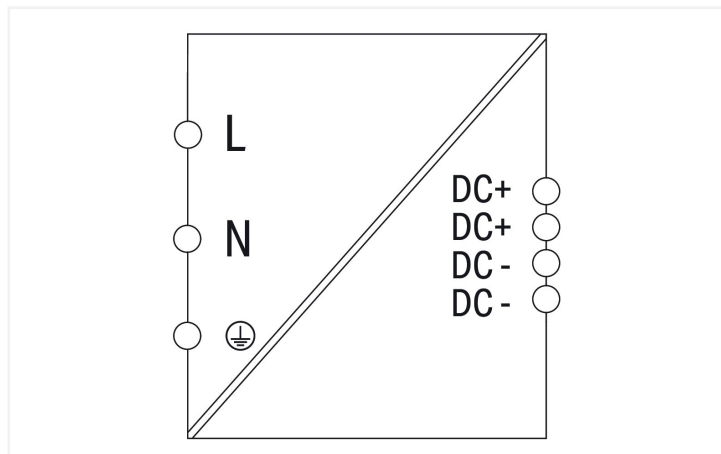

## Features:

- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per UL 61010-1; PELV per EN 60204

## Technical data

Input	
Phases	1
Nominal input voltage $U_{i, \text{nom}}$	1 x AC 110 ... 240 V
Input voltage range	1 x AC 100 ... 264 V
Nominal mains frequency range	47 ... 63 Hz; 0 Hz
Input current $I_i$	$\leq 0.7 \text{ A (230 VAC)}$ ; $\leq 1.6 \text{ A (115 VAC)}$
Power factor correction (PFC)	Active

Output	
Nominal output voltage $U_{o, \text{nom}}$	DC 24 V (SELV)
Default Setting	DC 24 V
Nominal output current $I_{o, \text{nom}}$	5 A (24 VDC)
Nominal output power	120 W
Deviation	$\leq 1 \%$
Overload behavior	Constant power (in overload range: $1.15 \dots 1.4 \times I_{o, \text{nom}}$ ); Shutdown and automatic restart in the event of a short circuit

Signaling and communication	
Signaling	1 x Overload LED (red) 1 x LED DC OK (green)
Operation status indicator	Green LED (24 VDC OK) Red LED (overload)

Efficiency/power losses	
Power loss $P_l$	$\leq 19.5 \text{ W (230 VAC; nominal load)}$
Power loss (max.) $P_{l(\text{max.})}$	23.5 W (110 VAC / 24 VDC; 5.5 A)
Efficiency (typ.)	86 % (230 VAC)

Circuit protection	
Internal fuse	F 3.15 A / 250 VAC
Backup fusing (recommended)	Circuit breaker: 10 A, 16 A; Tripping characteristic: B or C

### Safety and protection

Isolation voltage (pri.-sec., AC)	3000 V
Isolation voltage (pri.-PE, AC)	1500 V
Protection class	I
Protection type	IP20; per EN 60529
Overtoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes

### Connection data

Connection type 1	Input/output
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 745 Series
Solid conductor	0.08 ... 4 mm <sup>2</sup> / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 4 mm <sup>2</sup> / 28 ... 12 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Note (conductor cross-section)	12 AWG: THHN, THWN

### Physical data

Width	75 mm / 2.953 inches
Height	92 mm / 3.622 inches
Depth from upper-edge of DIN-rail	136 mm / 5.354 inches

### Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

### Material data

Fire load	4.8 MJ
Weight	850 g

### Environmental requirements

Ambient temperature (operation)	-10 ... +60 °C
Ambient temperature (storage)	-25 ... +85 °C
Relative humidity	10 ... 96 % (no condensation permissible)
Derating	-4 %/K (> 40 °C; 230 VAC)
Climatic category	3K3 (per EN 60721)

**Standards and specifications**

Conformity marking	CE; UKCA
Standards/specifications	EN 61010-1 EN 61204-3 UL 61010-1 SEMI F47 UL 121201 EN IEC 61010-2-201 UL 61010-2-201

**Commercial data**

Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 9.0	EC002540
ETIM 8.0	EC002540
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4045454908188
Customs tariff number	85044083900

**Environmental Product Compliance**

RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Bulgaria)	c5cda720-be2e-42e5-9f2a-5ee3811607c4
SCIP notification number (Czech Republic)	36f49618-4b21-4699-af60-f1fc5941c014

**Approvals / Certificates**

**General approvals**      **Declarations of conformity and manufacturer's declarations**



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03078
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
MFD for SEMI F47 WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

**Downloads**

**Environmental Product Compliance**

Compliance Search			
Environmental Product Compliance 787-722			↓

**Documentation**

Bid Text			
787-722	12.07.2019	xml 6.85 KB	↓
787-722	12.07.2019	docx 21.09 KB	↓

Instruction Leaflet			
CCC Ex (Additional information)	26.04.2023	pdf 127.27 KB	↓
Primary Switch Mode Power Supply ECO-Power	V 2.2.10 22.07.2024	pdf 229.55 KB	↓

**CAD/CAE-Data**

CAD data	
2D/3D Models 787-722	↓

CAE data	
EPLAN Data Portal 787-722	↓
WSCAD Universe 787-722	↓
ZUKEN Portal 787-722	↓

**1 Compatible Products**

**1.1 Optional Accessories**

**1.1.1 Tool**

**1.1.1.1 Operating tool**



[Item No.: 210-720](#)  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

[Item No.: 210-769](#)  
SCREWDRIVER; green