
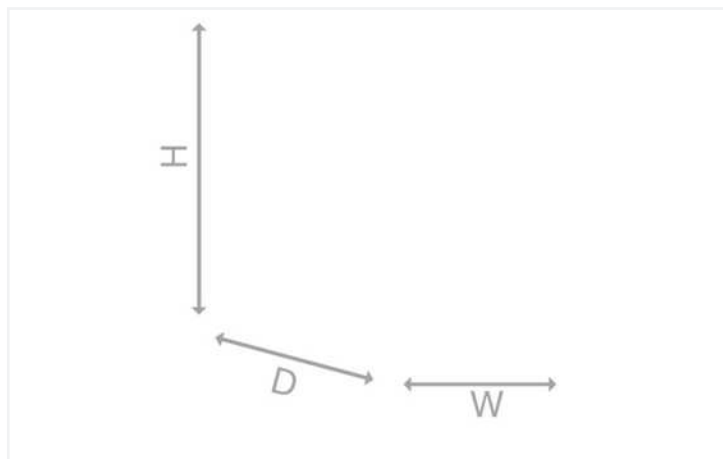


Data Sheet | Item Number: 787-734

Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 20 A output current; DC OK contact; 6,00 mm²

<https://www.wago.com/787-734>

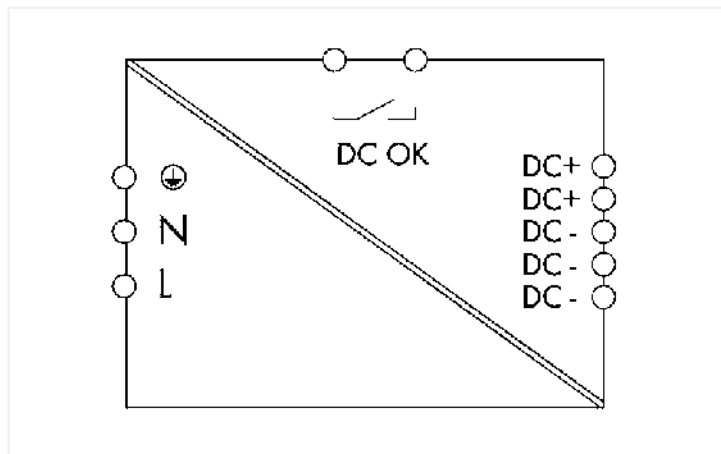

Features:

- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- Fast and tool-free termination via lever-actuated PCB terminal blocks
- Bounce-free switching signal (DC OK) via optocoupler
- Parallel operation
- Electrically isolated output voltage (SELV) per UL 60950-1; PELV per EN 60204

Technical data

Input		Output	
Phases	1	Nominal output voltage $U_{o, nom}$	DC 24 V (SELV)
Nominal input voltage $U_{i, nom}$	1 x AC 110 ... 240 V	Output voltage range	DC 22 ... 28 V (adjustable)
Input voltage range	1 x AC 85 ... 264 V; DC 130 ... 373 V	Default setting	DC 24 V
Nominal mains frequency range	47 ... 63 Hz; 0 Hz	Nominal output current $I_{o, nom}$	20 A (24 VDC)
Input current I_i	≤ 3 A (230 VAC); ≤ 6.3 A (115 VAC)	Nominal output power	480 W
Discharge current	≤ 2 mA	Deviation	≤ 1 %
Inrush current	≤ 30 A	Residual ripple	≤ 100 mV (Peak-to-peak)
Power factor	≥ 0.94 (230 VAC); ≥ 0.98 (115 VAC)	Overload behavior	Constant power (in overload range: 1.15 ... 1.4 x $I_{o, nom}$); Shutdown and automatic restart in the event of a short circuit
Power factor correction (PFC)	active		
Mains failure hold-up time	≥ 20 ms (230 VAC)		

Signaling and Communication

Signaling	1 x LED DC OK (green) 1 x Overload LED (red) 1 x DC OK signal output (optocoupler as make contact; max. 31.2 V; 20 mA)
Operation status indicator	Green LED (24 VDC OK) Red LED (overload)

Efficiency/power losses

Power loss P_I	≤ 65 W (230 VAC; nominal load)
Power loss (max.) $P_{I(max)}$	107 W (110 VAC / 24 VDC; 23 A)
Efficiency (typ.)	90 %

Circuit protection

Internal fuse	T 10 A / 250 VAC
Backup fusing (required)	An external DC fuse is required for the DC input voltage.
Backup fusing (recommended)	Circuit breaker: 10 A, 16 A; Tripping characteristic: B or C

Safety and protection

Isolation voltage (pri.-sec.)	DC 4.242 kV
Isolation voltage (pri.-PE)	DC 2.2 kV
Isolation voltage (sec.-PE)	DC 0.7 kV
Isolation voltage (sec.-signal)	DC 0.7 kV
Protection class	I
Protection type	IP20; per EN 60529
Resistance to reverse feed	\leq DC 29 V
Overtoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	> 250,000 h (per IEC 61709)

Connection data

Connection type 1	Input/signaling
Connection technology	Push-in CAGE CLAMP®
WAGO connector	WAGO 2706 Series
Solid conductor	0.5 ... 6 mm ² / 20 ... 10 AWG
Fine-stranded conductor	0.5 ... 6 mm ² / 20 ... 10 AWG
Strip length	11 ... 12 mm / 0.43 ... 0.47 inches
Connection type 2	Output
Connection technology 2	Push-in CAGE CLAMP®
WAGO connector 2	WAGO 2716 Series
Solid conductor 2	1.5 ... 16 mm ² / 16 ... 6 AWG
Fine-stranded conductor 2	1.5 ... 16 mm ² / 16 ... 6 AWG
Strip length 2	12 ... 13 mm / 0.47 ... 0.51 inches

Physical data

Width	115 mm / 4.528 inches
Height	136 mm / 5.354 inches
Depth from upper-edge of DIN-rail	144 mm / 5.669 inches

Mechanical Data

Mounting type	DIN-35 rail
---------------	-------------

Material Data

Fire load	0 MJ
Weight	2120 g

Environmental requirements

Ambient temperature (operation at U_N)	-25 ... +70 °C
Surrounding air temperature (storage)	-25 ... +85 °C
Relative humidity	≤ 95% (no condensation permissible)
Derating	See instruction manual

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 62368-1 EN 61204-3 EN 61000-6-2 EN 61000-6-3 UL 60950-1 UL 508

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4050821495291
Customs tariff number	85044083900

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC Brjansker Zertifizierungs- stelle	TP TC 004/2011,TP TC 020/2011	EAC RU C-DE.AM02. B.00089_19
UL Underwriters Laboratories Inc.	UL 508	E255817
UL Underwriters Laboratories Inc.	UL 60950-1	E255815

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-734



Documentation

Bid Text

787-734	12.07.2019	xml 7.06 KB	
787-734	12.07.2019	docx 21.31 KB	

Instruction Leaflet

Primary Switch Mode Power Supply ECO-Power	V 1.6 21.12.2020	pdf 370.91 KB	
--	---------------------	------------------	--

CAD/CAE-Data

CAD data

2D/3D Models 787-734



CAE data

EPLAN Data Portal 787-734	
WSCAD Universe 787-734	
ZUKEN Portal 787-734	

1 Compatible Products

1.1 Optional Accessories

1.1.1 Tool

1.1.1.1 Operating tool



Item No.: 210-769
SCREWDRIVER, green