

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0787950001](#)
Status: **Active**
Overview: Serial Attached SCSI (SAS) Connectors
Description: 1.27mm Signal Pitch, 0.80mm SCSI Pitch, 1.27mm Power Pitch SAS-3 Receptacle, Vertical, Surface Mount, with Side Solder Tabs, 1.60mm PCB Thickness, 29 Circuits, with Cap, 44.60mm Length, 5.00mm Width, Embossed Tape on Reel, Lead-Free

Documents:

3D Model	Application Specification AS-78795-001-001 (PDF)
3D Model (PDF)	Packaging Specification PK-78795-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-78795-001-001 (PDF)	

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	I/O Connectors
Series	78795
Application	Board-to-Board
Component Type	Receptacle
Electrical Model	Yes
Overview	Serial Attached SCSI (SAS) Connectors
Product Name	SAS 12G, SAS-3
Type	N/A
UPC	887191377131

Physical

Circuits (Loaded)	29
Circuits Detail	Signal 14, Power 15
Color - Resin	Black
Durability (mating cycles max)	500
Flammability	94V-0
Gender	Female
Keying to Mating Part	Yes
Lock to Mating Part	None
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	1.571/g
Number of Rows	2
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Embossed Tape on Reel
Panel Mount	No
Pitch - Mating Interface	0.80mm, 1.27mm
Pitch - Termination Interface	0.80mm, 1.27mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	0° to +55°C

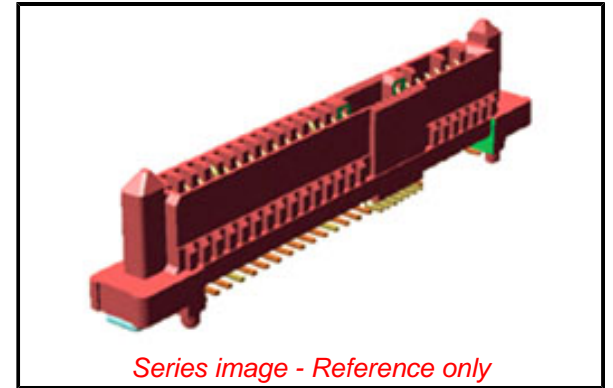

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Contained Per -
D(2020)4578-DC (25
June 2020)
perfluorooctanoic acid
decamethylcyclotrasiloxane
disodium 3,3'-[[1,1'-
biphenyl]-4,4'-
diylbis(azo)
diisopentylphthalate
1,2-diethoxyethane
dibutyltin dichloride
1,3-propanesultone
ammoniumpentadecafluorooctanoate
2-ethylhexyl 10-
ethyl-4,4-dioctyl-7-
oxo-8-oxa-3,
2-(2H-benzotriazol-2-
yl)-4,6-
ditertpentylphenol
2-(2H-benzotriazol-2-
yl)-4-(tert-butyl)-6-
(sec-b
1,2-
Benzenedicarboxylic
acid, dihexyl ester,
bra
diisohexyl phthalate
1,2-
benzenedicarboxylic
acid, dipentylester,
bra
n-pentyl-
isopentylphthalate
Boric acid
Nonadecafluorodecanoic
acid (PFDA) and its
sodiu

China RoHS

Termination Interface: Style
Waterproof / Dustproof

Surface Mount
No

Electrical

Current - Maximum per Contact 1.5A
Voltage - Maximum 30V

Solder Process Data

Duration at Max. Process Temperature (seconds) 010
Lead-free Process Capability REFLOW
Max. Cycles at Max. Process Temperature 001
Process Temperature max. C 260

Material Info

Reference - Drawing Numbers

Application Specification AS-78795-001-001
Electrical Model Document EE-78795-001
Packaging Specification PK-78795-001
Product Specification PS-78795-001-001
S-Parameter Model SP-78795-001
Sales Drawing SD-78795-001

Tris(4-nonylphenyl,
branched and linear)
phosphi
Perfluorobutane
sulfonic acid (PFBS)
and its sal
Pyrene
Dodecachloropentacyclo[12.2.1.16,9.02,13.05,10]o
Perfluorononan-1-
oic acid
(2,2,3,3,4,4,5,5,6,6,7
Methylhexahydrophthalic
anhydride
reaction mass of
2-ethylhexyl 10-
ethyl-4,4-dioct
Perfluorohexane-1-
sulphonic acid and its
salts
Lead sulfochromate
yellow
strontium chromate
bis(2-methoxyethyl)
ether
pentazinc chromate
octahydroxide
1,2-dimethoxyethane
1,2-bis(2-
methoxyethoxy)ethane
bis(pentabromophenyl)
ether
cadmium oxide (non-
pyrophoric)
cadmium sulphide
orange lead
lead
cadmium
lead dinitrate
lead oxide sulfate
pentalead tetraoxide
sulphate
dioxobis(stearato)trilead
Lead titanium
zirconium oxide
lead cyanamidate
Sulfurous acid, lead
salt, dibasic
[phthalato(2-)]dioxotrilead
benzo[a]pyrene
4-aminoazobenzene
dihexyl phthalate
(DnHP)
ethylene thiourea
di-n-pentyl phthalate
(DPP)

Halogen-Free Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

78795 Series

Mates With

SAS / SATA plug

This document was generated on 10/21/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION