


Product description	Female cable connector, Contacts: 4, unshielded, moulded on the cable, IP65, PVC, black, 4 x 0.25 mm², Snap-in version, 5 m
-	-
Area	series 718
Part no.	79 3386 45 04


Illustration



Scale drawing

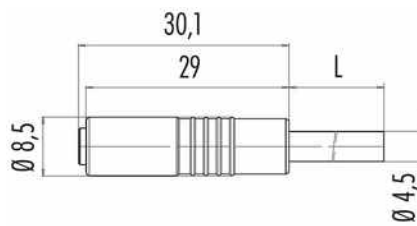

Contact arrangement (Plug-in side)

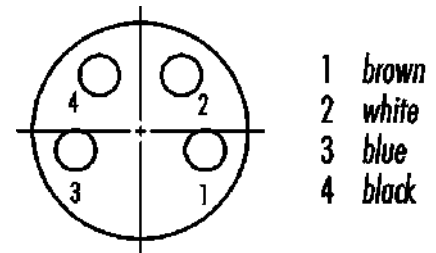

Technical data

General features

Part no.	79 3386 45 04
Connector design	Female cable connector
Cable length	5 m
Version	Connector socket straight
Connector locking system	snap-in
Termination	moulded on the cable
Degree of protection	IP65
Cross-sectional area	0.25 mm ² / AWG 24
Temperature range from/to	-25 °C / 70 °C
Mechanical operation	> 100 Mating cycles
Additional information	Snap-in version
Weight (g)	156.00
Customs tariff number	85444290

Electrical parameters

Rated voltage	60 V
Rated impulse voltage	1500 V
Rated current (40 °C)	4.0 A
Pollution degree	3
Overvoltage category	II
Insulating material group	II
EMC compliance	unshielded

Material

Housing material	PUR
Contact body material	PUR
Contact material	CuSn (bronze)
Contact plating	Au (gold)

Product description	Female cable connector, Contacts: 4, unshielded, moulded on the cable, IP65, PVC, black, 4 x 0.25 mm ² , Snap-in version, 5 m
-	-
Area	series 718
Part no.	79 3386 45 04

REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	78fe6a88-e3a2-4e25-b321-785471f7a363

Classifications

eCl@ss 11.1	27-06-03-11
ETIM 9.0	EC002638

Declarations of conformity

Low Voltage Directive	2014/35/EU (EN 60204-1:2018;EN 60529:1991)
RoHS Directive	2011/65/EU (EN 50581:2012)

Cable data - Structure of the cable

Cable diameter	4.5 mm
Cross section	4 x 0.25 mm ²
Sheath material	PVC
Single-lead insulation	PVC
Single-lead structure	32 x 0.10 mm
Cable color	black

Cable data - Electrical properties

Conductor resistance	79.9 Ω/Km (20°C)
----------------------	------------------

Cable data - Mechanical properties

Bending radius, fixed cable	≥ 5 x Ø
Bending radius, moving cable	≥ 10 x Ø
Bending cycles	> 5 million

Cable data - Thermal properties

Temperature range cable in move from/to	-5 °C / 70 °C
Temperature range cable fixed from/to	-25 °C / 70 °C

Cable data - Other features

Halogen free	no
--------------	----

Product description	Female cable connector, Contacts: 4, unshielded, moulded on the cable, IP65, PVC, black, 4 x 0.25 mm², Snap-in version, 5 m
-	-
Area	series 718
Part no.	79 3386 45 04

Security notices

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP67 and IP68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.