


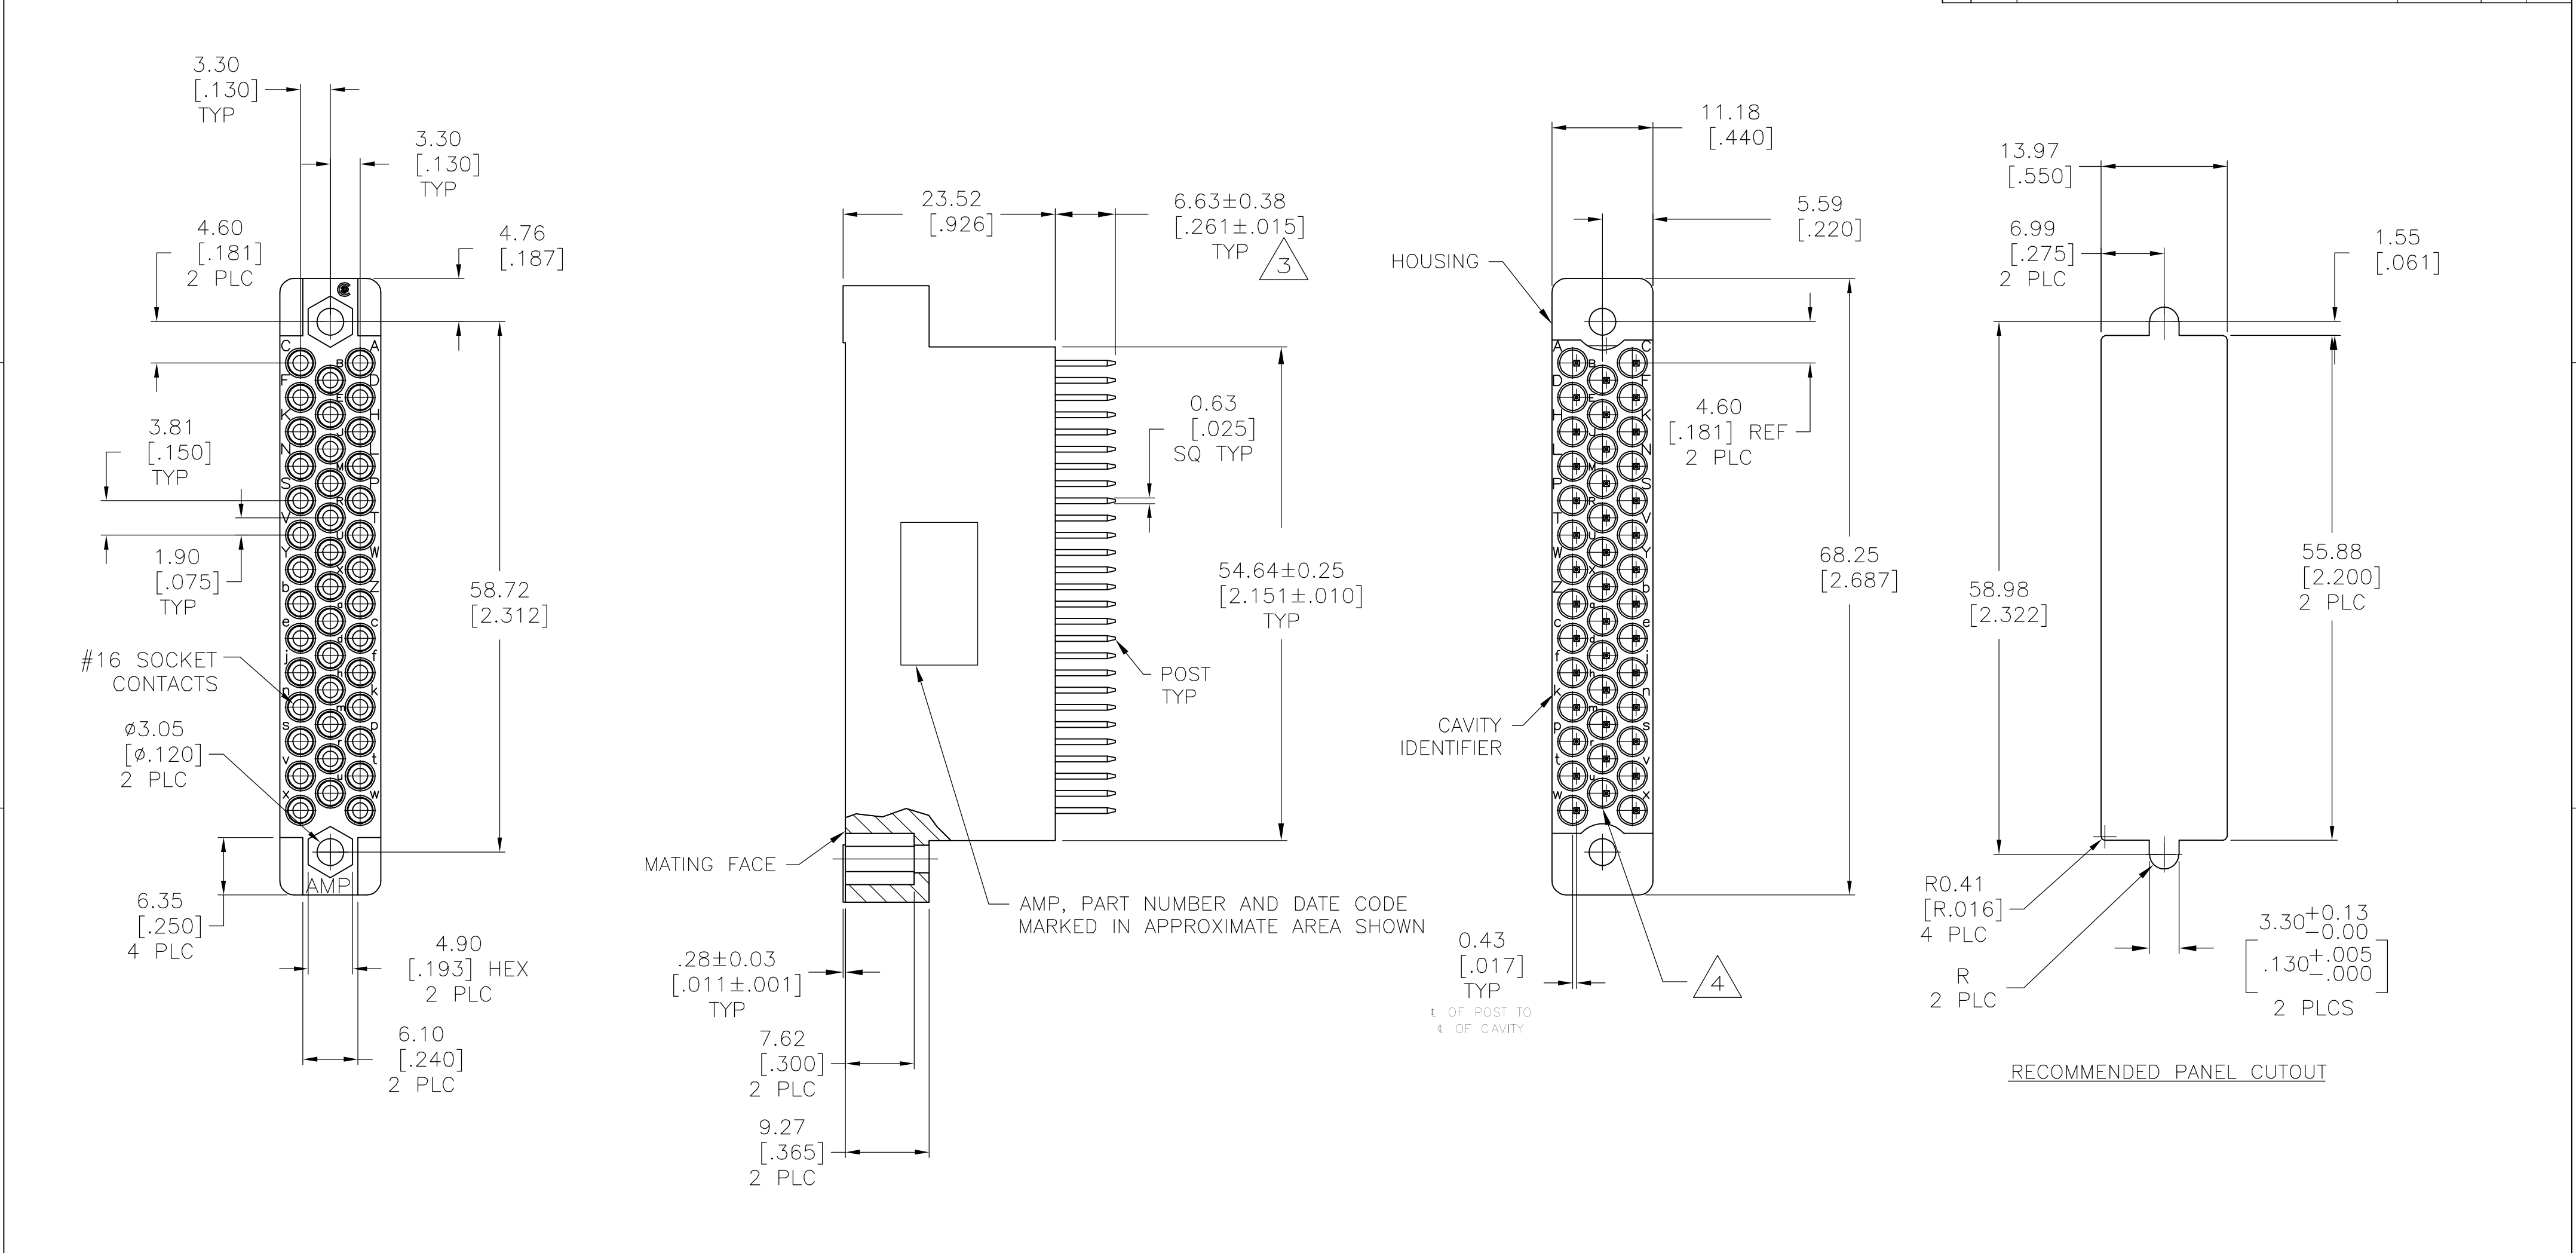

1

HOUSING: DIALLYL PHTHALATE, BLUE.
CONTACT BODY & POST: BRASS.
CONTACT SPRING: STAINLESS STEEL.

2

CONTACT BODY: 0.76µm [.000030] MIN GOLD INTERNALLY FOR A LENGTH OF 5.08[.200] MIN FROM MATING END,
GOLD FLASH ON THE REMAINDER OVER 0.76µm[.000030] MIN NICKEL.
CONTACT POST: 2.54µm [.000100] MIN TIN-LEAD OVER 2.54µm[.000100] MIN COPPER.

3

WHEN CONTACT IS FULLY SEATED FORWARD.

4

CONTACTS NOT LOADED IN MIDDLE ROW.

5

CONTACT BODY: 0.76µm [.000030] MIN GOLD INTERNALLY FOR A LENGTH OF 5.08[.200] MIN FROM MATING END,
GOLD FLASH ON THE REMAINDER OVER 0.76µm[.000030] MIN NICKEL.
CONTACT POST: 2.54µm [.000100] MIN TIN OVER 2.54µm[.000100] MIN COPPER.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

MATERIAL
1

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± 0.13 [.005]
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH -

DWN
S SCHLEGEL
5/15/02

CHK
H. SAID
5/15/02

APVD
H. SAID
5/15/02

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

tyco
Electronics

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

RCPT. ASSEMBLY, 41 POSITION,
POSTED, M SERIES

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=796885

RESTRICTED TO
-

SCALE
2:1

SHEET
1 of 1

REV
C1