

BSE SERIES / TRACK MOUNT SOCKET

Built to MIL-DTL-12883

FEATURES

- Track mounted

APPLICATIONS


- Aerospace
- Ground Vehicle

GENERAL CHARACTERISTICS

- Weight 0.045 lbs (20.41g) Max.
- Materials
 - Body Material: Polyetherimide
 - Grommet Material: Silicone Rubber
 - Bracket Material: 17-7 ph cres passivated in accordance with SAE AMS QQ-P-35
- Plating: Sulfamate nickel in accordance with SAE-AMS-QQ-N-290, 100 μ in. min.
- Finish: Shot peen, in accordance with AMS-S-13165
- Maximum Holding Force: 3 Lbs (13.34 N)

ENVIRONMENTAL CHARACTERISTICS


- Temperature Range: -70°C to +125°C

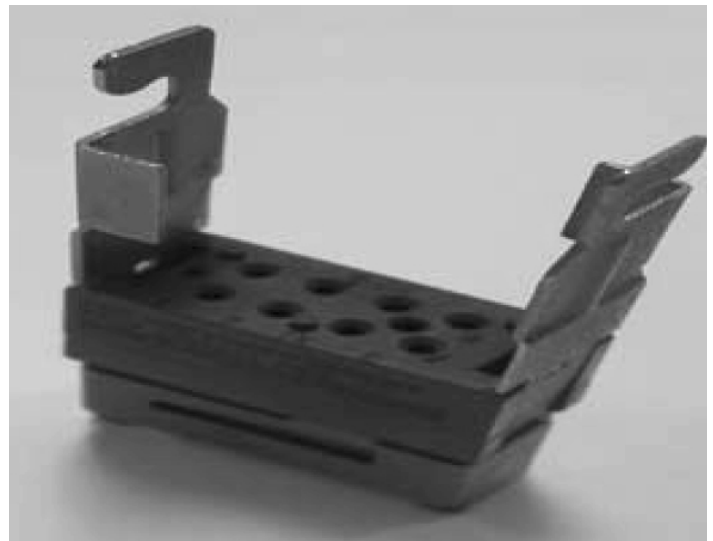

BSE Series / Track Mount Socket

Built to MIL-DTL-12883

PART NUMBERING

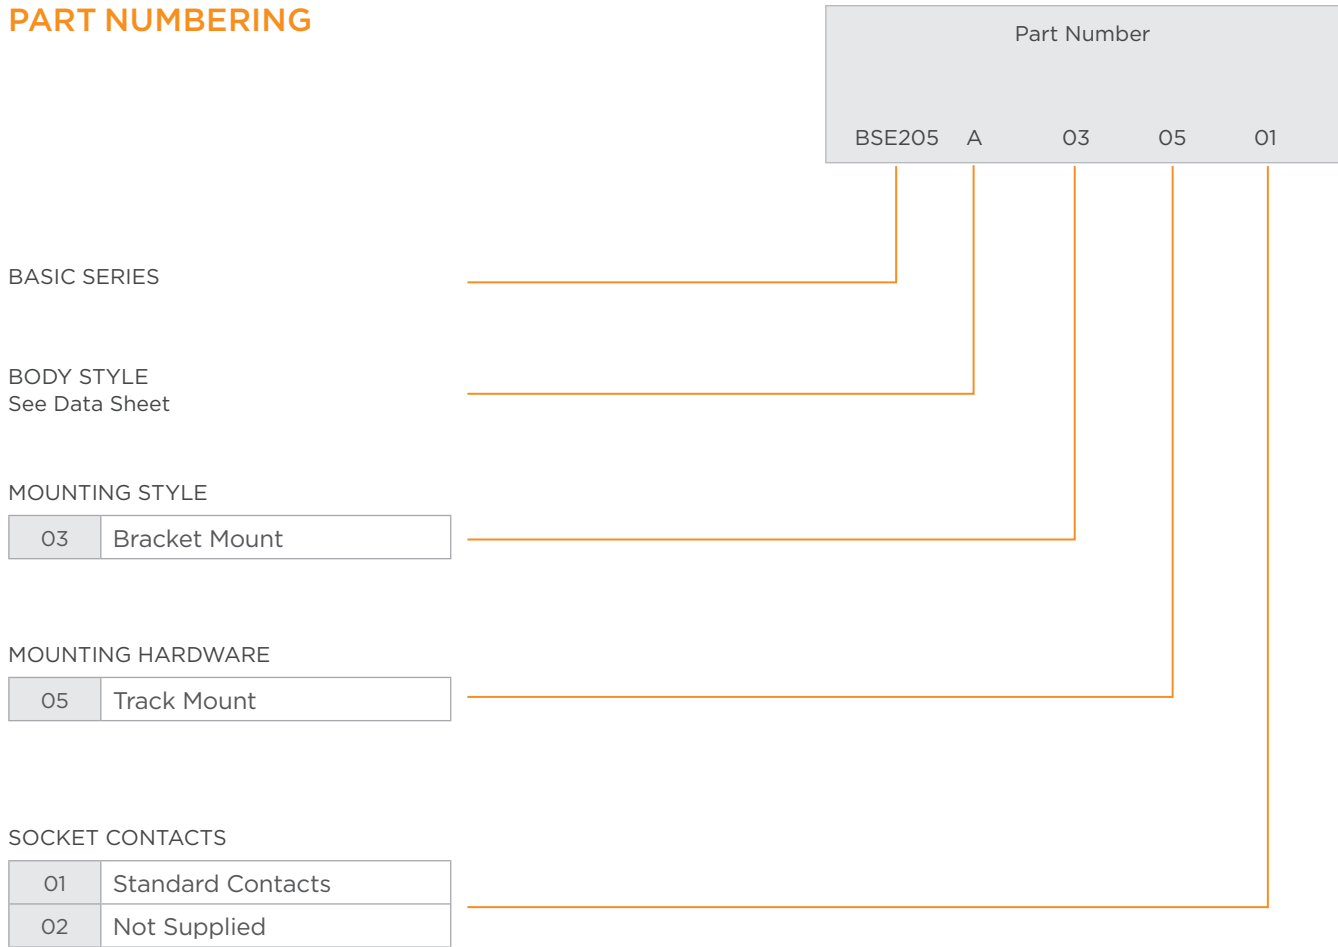

CONTACT INFORMATION

Socket Type	Number of Terminal Contacts	Terminal Contacts	Number of Ground Contacts	Ground Contacts
BSE205	8	M39029/57-357	1	M39029/57-354
BSE405	14	M39029/57-357	1	M39029/57-357
BSE210	8	M39029/57-358	1	M39029/57-354
BSEL210	6 3	M39029/57-358 M39029/57-354	1	M39029/57-354
BSE410	14	M39029/57-358	1	M39029/57-358
BSEL410	12 3	M39029/57-358 M39029/57-357	1	M39029/57-357
BSE325	9 2	M39029/57-359 M39029/57-358	1	M39029/57-357

BSE Series / Track Mount Socket


Built to MIL-DTL-12883

CONTACT INFORMATION (CONTINUED)

Designation	Mating End Size	Wire Barrel Size	Basic Crimping Tool	Positioner Tool	Insertion Tool	Removal Tool
M39029/57-354	22	22	M22520/7-01	M22520/2-06	M81969/14-01	M81969/14-01
M39029/57-357	20	20	M22520/1-01	M22520/1-04	M81969/14-02	M81969/14-02
M39029/57-358	16	16	M22520/1-01	M22520/1-04	M81969/14-03	M81969/14-03
M39029/57-359	12	12	M22520/1-01	M22520/1-04	M81969/14-04	M81969/14-04


BSE205

For use with E205 and ETV2 Series Relays

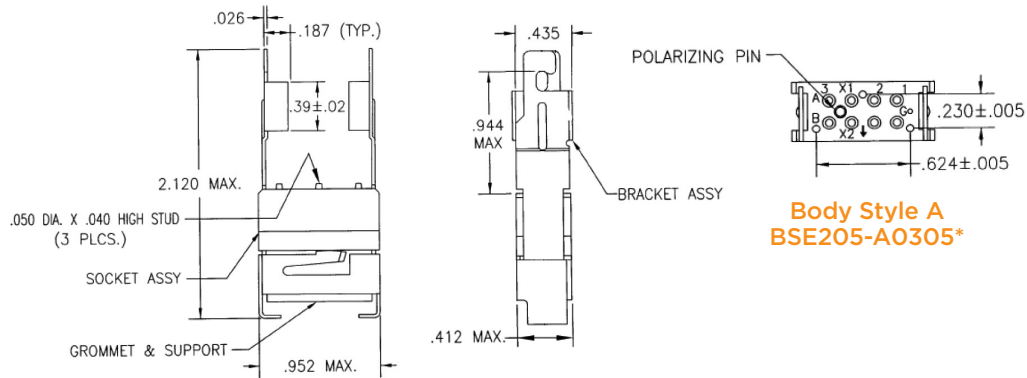

BSE405

For use with E405 and ETV4 Series Relays

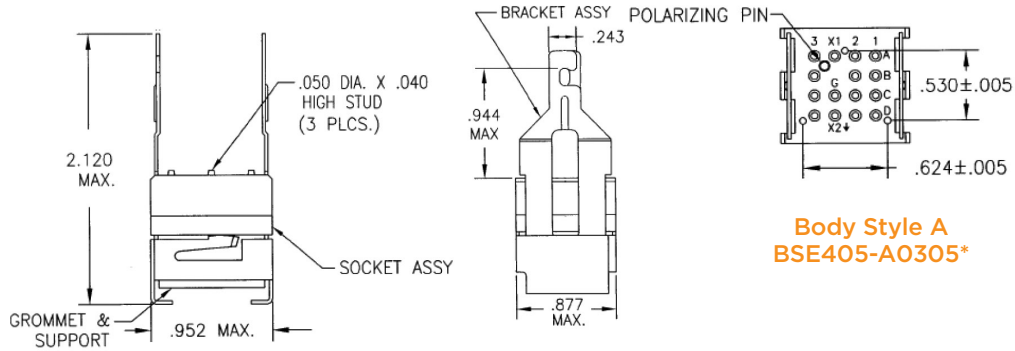


BSE Series / Track Mount Socket

Built to MIL-DTL-12883


BSE210, BSEL210

For use with E210, E215, EL210, and EL215 Series Relays

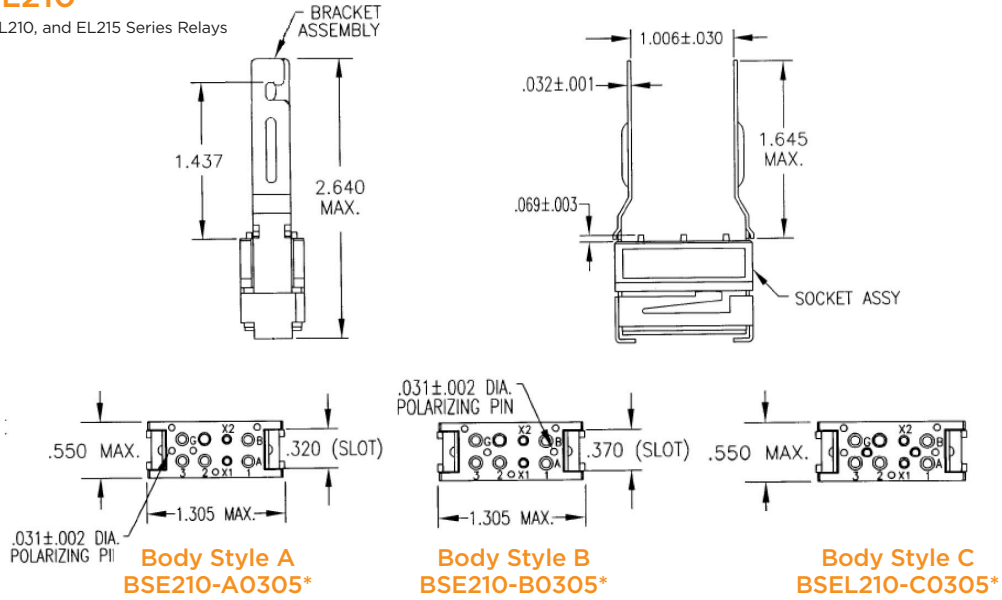


BSE410, BSEL410

For use with E410, ES410, EA410, E415, ES415, EA415, EL410, ELS410, ELR410, EL415, ELS415, and ELR415 Relays with Mounting Code 4 and Terminal Style M or K

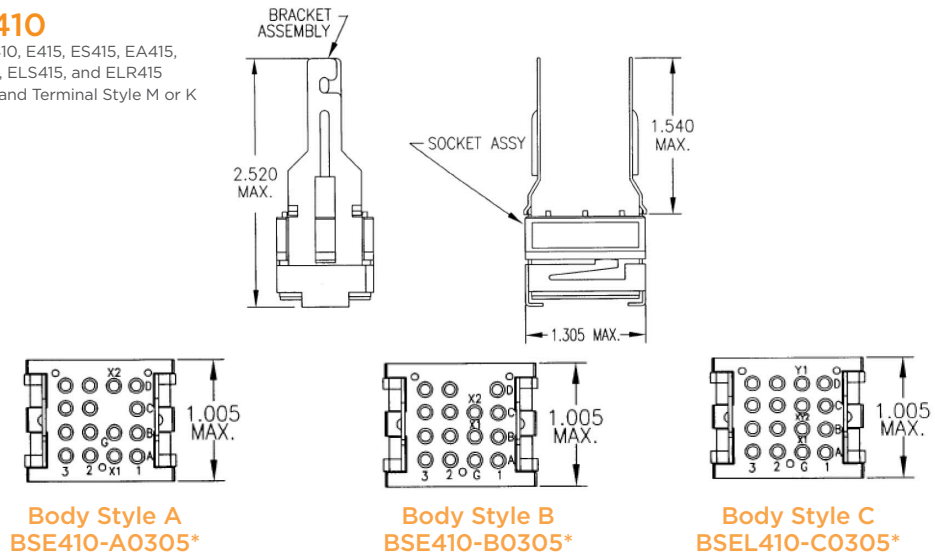

BSE325

For use with E325 Series Relays

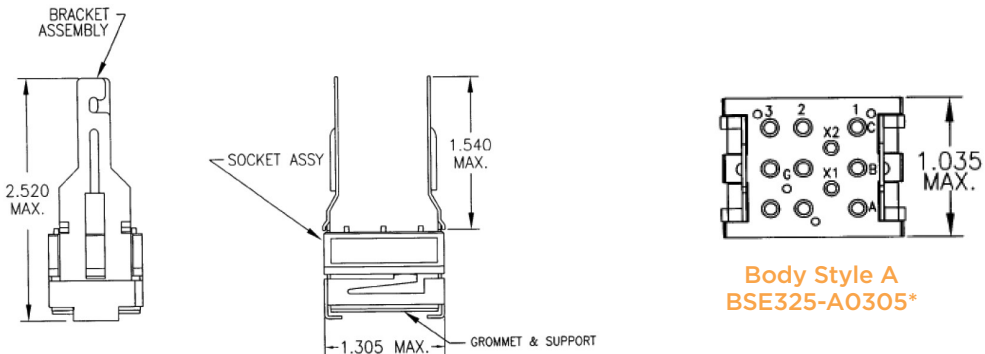

Connect With Us

We make it easy to connect with our experts and are ready to provide all the support you need. Visit te.com/support to chat with a Product Information Specialist.

te.com/dri-relays

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

©2024 TE Connectivity. All Rights Reserved.

adm-dri-bse-ds-en-0824 10/24