

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [82-24-7706](#)
Status: **Active**
Description: 2.54mm Pitch Round Conductor Flat Cable - 24 AWG (7 x 32) Stranded, Tinned, 6 Circuits, Reel 30.48m Length

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR61126
 UL E61522

General

Product Family Cable
 Series [24226](#)
 Crimp Quality Equipment Yes
 Geographic Area Asia
 Product Name Ribbon
 UPC 800753512306

Physical

Cable Length 30.48m
 Circuits (Loaded) 6
 Insulation PVC
 Net Weight 1134.600/g
 Packaging Type Reel
 Pitch - Termination Interface 2.54mm
 Temperature Range - Operating -20°C to +105°C
 Wire Size AWG 24
 Wire/Cable Type (7x32) Stranded, Tinned

Electrical


Current - Maximum per Contact N/A
 Voltage - Maximum 300V

Material Info

Old Part Number 24226-06-100B

Reference - Drawing Numbers

Sales Drawing SD-24226-001

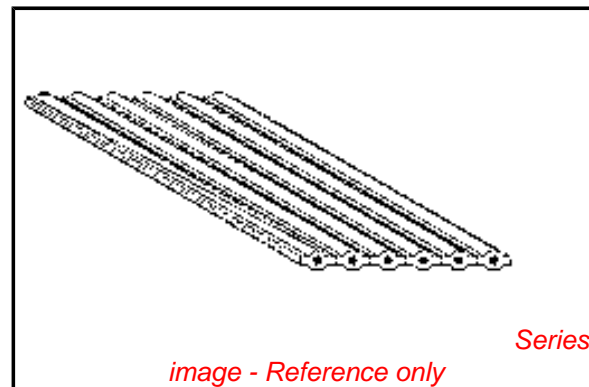

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[24226Series](#)

Use With

70400 C-Grid SL™ IDT Connector Assembly. 70475 SL™ IDT Connector Assembly. 7720 KK® IDT Double Cantilever Contact