


826468-8 Product Details

[Live Product Chat](#)

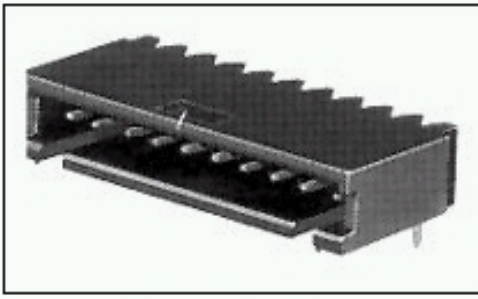

826468-8

TE Part Number: 826468-8

[Active](#)

[Add to Part List](#)

.100 inch AMPMODU Headers

[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Header
- Header Type = Shrouded
- Number of Rows = Single
- Number of Positions = 8
- Mating Post Length = 6.70 mm

[View all Features](#) | [Find Similar Products](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)
- ▶ [Request Samples](#)

NEW!

Documentation & Additional Information

Documents are temporarily unavailable. We are working hard to correct the problem. Please try again later.

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Header
- [Number of Positions](#) = 8
- [Mount Angle](#) = Right Angle
- [PCB Retention Feature](#) = No
- [Surface Mount Compatible](#) = Yes
- [Board Standoff](#) = Without
- [Mounting Ears](#) = Without
- [Mating Connector Lock](#) = With
- [Mating Connector Lock Type](#) = Detent Latching
- [Housing Style](#) = Open End / Open End
- [Post Size \(mm \[in\]\)](#) = 0.64 [.025]
- [Profile](#) = Standard

Mechanical Attachment:

- [Mating Post Length \(mm \[in\]\)](#) = 6.70 [0.264]
- [Panel Attachment](#) = Without

Termination Related Features:

- [Termination \(Solder\) Post Length \(mm \[in\]\)](#) = 3.20 [0.126]
- [Solder Tail Contact Plating](#) = Tin over Nickel

Body Related Features:

- [Header Type](#) = Shrouded
- [Number of Rows](#) = Single
- [Centerline, Matrix \(mm \[in\]\)](#) = 2.54 [.100]
- [Selectively Loaded](#) = No
- [Mount Type](#) = PC Board

Contact Related Features:

- [Contact Mating Area Plating Material](#) = Gold (5) over Nickel
- [Contact Shape](#) = Round
- [Contact Material](#) = Phosphor Bronze

Housing Related Features:

- [Housing Material](#) = Polyester
- [Housing Color](#) = Black
- [Housing Flammability Rating](#) = UL 94V-0

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C, Reflow solder capable to 245°C, Reflow solder capable to 260°C, Pin-in-Paste capable to 245°C, Pin-in-Paste capable to 260°C
- [RoHS/ELV Compliance History](#) = Always was RoHS compliant

Conditions for Usage:

- [High Temperature Housing](#) = Yes
- [Operating Temperature \(°C\)](#) = -55 - +105

Operation/Application:

- [High Speed Serial Data Connector](#) = No

Other:

- [Brand](#) = AMP

[Provide Website Feedback](#) | [Need Help?](#)