


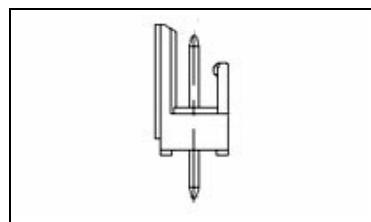

## 828548-2 Product Details

[Share](#) [Print](#) [Email](#)


**828548-2**

### .100 inch AMPMODU Headers

Always EU RoHS/ELV Compliant (Statement of Compliance)

#### Product Highlights:

- Connector
- Header Type = Shrouded
- 2 Positions
- Mating Post Length = 5.20 mm
- Number of Rows = 1

[View all Features](#)

#### Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

TE Internal Number: 828548-2

Active

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

### Documentation & Additional Information

Documents are temporarily unavailable. We are working hard to correct the problem. Please try again later.

#### Additional Information:

- [Product Line Information](#)

#### Related Products:

- [Tooling](#)

### Product Features (Please use the Product Drawing for all design activity)

#### Product Type Features:

- Product Type = Connector
- Mount Angle = Vertical
- PCB Mount Retention = Without
- Board Standoff = With
- Mating Connector Lock = With
- Mating Connector Lock Type = Detent Latching
- Profile = Standard

#### Mechanical Attachment:

- Mounting Ears = Without
- Panel Mount Retention = Without

#### Termination Features:

- Termination Post Length (mm [in]) = 2.90 [0.114]

#### Dimensions:

- Mating Post Length (mm [in]) = 5.20 [0.205]

#### Body Features:

- Header Type = Shrouded
- Selectively Loaded = No
- Mount Type = Printed Circuit Board

#### Contact Features:

- Contact Plating, Mating Area, Material = Tin
- Contact Base Material = Phosphor Bronze

#### Housing Features:

- Housing Material = PBT - GF
- Housing Style = Open End / Open End

#### Configuration Features:

- Number of Positions = 2
- Number of Rows = 1
- Surface Mount Compatible = No

#### Industry Standards:

- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant
- UL Flammability Rating = UL 94V-0

#### Conditions for Usage:

- High Temperature Housing = No

#### Operation/Application:

- High Speed Serial Data Connector = No

#### Packaging Features:

- Packaging Quantity = 2,500/Box

#### Other:

- Brand = AMP
- Comment = AMP-QUICK Header

[Feedback](#)

### Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)
- [AODA Accessibility Policy](#)
- [AODA Multi-Year Accessibility Plan](#)

### Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

### Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

### Keep Me Informed



