

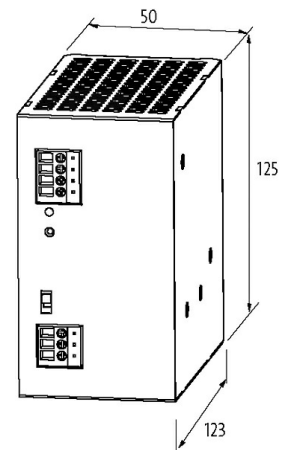
**ECO-RAIL-2 POWER SUPPLY 1-PHASE,**

IN: 90 ... 132 VAC / 173 ... 264 VAC OUT: 24V/5ADC

INPUT: 100...240 V AC

OUTPUT: 23...28 V DC

Current: 5 A

[Link to Product](#)**Illustration**

Product may differ from Image

**Approvals****General data**

Standards	IEC 61010-2-201, EN 61204-3, EN 61000-3-2
Relative humidity	20...90%, no condensation
Protection	IP20
Efficiency	87% (115 V AC); 88% (230 V AC)

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 04/21

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Connection	Screw terminals
Mounting method	DIN-rail mountable TH35 (EN 60715)
Dimensions H×W×D	125×50×123 mm
Temperature range	0...+40 °C, ...+55 °C derating (storage temperature -20...+85 °C)
<b>Output</b>	
Output voltage	24 V DC ±1%; 23...28 V adjustable
Output current	5 A (+40 °C); 4 A (+55 °C)
Mains failure bridging time	min. 45 ms (115 V AC); min. 45 ms (230 V AC)
Ripple	max. 10 mV eff/rms
Spikes	max. 50 mV ss/pp
Unit protection	short-circuit and overload protected
LED display	LED (green) for output voltage
Parallel usage/serial usage	no/yes (max. 2 units)
<b>Input</b>	
Input voltage	100...240 V AC
Input current	2.4 A (100 V AC); 1.2 A (240 V AC)
Inrush current after 1 ms	max. 20 A (230 V AC)
Frequency	50...60 Hz
Input fuse (internal)	5 A (T)
<b>Commercial data</b>	
country of origin	CN
customs tariff number	85044082
EAN	4048879694476
eClass	27049002
Packaging unit	1