


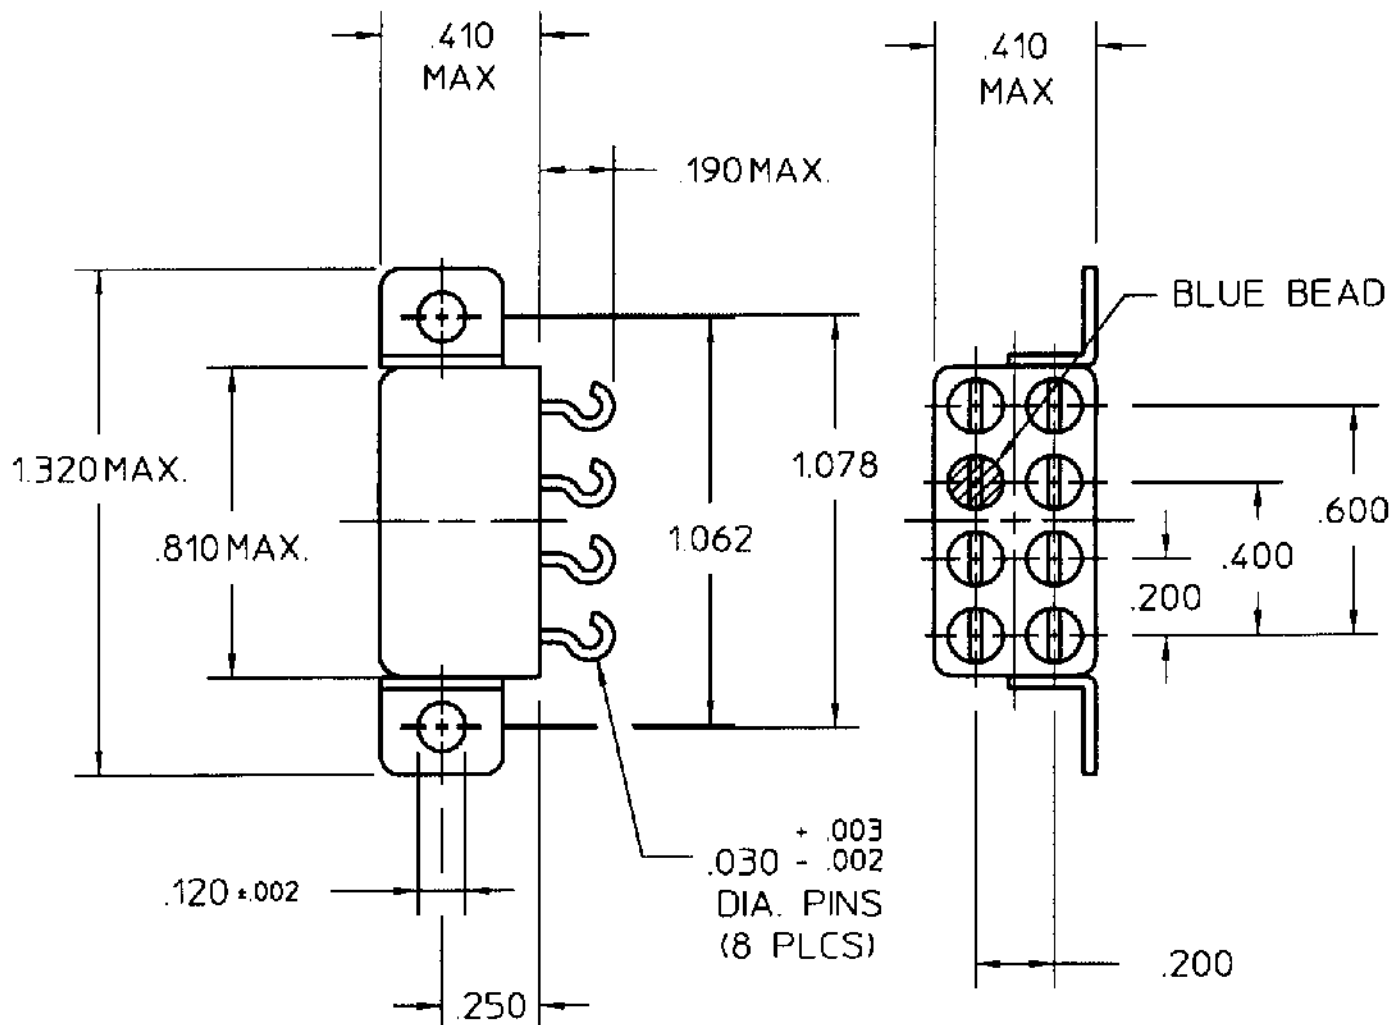


REV. 1 4/1/97

COIL: @ +25° C
 RESISTANCE 700 OHMS ± 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.5 VDC
 MUST RELEASE 1.5 VDC

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 ± 1 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: _____

CUSTOMER DATA SHEET

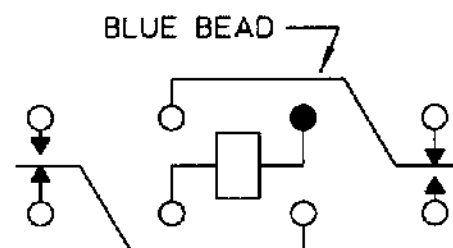

CONTACT RATING: RESISTIVE 5A LAMP
 400mA, INDUCTIVE 1.875 AMP (200mH)
 28VDC 100,000 OPERATIONS (LAMP & IND.)
 EXTRAPOLATED FROM RES. 5A RATING

DR. R.B. 1/24/95 CK 4/1/97

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. C. I. I. STD.
 CUST. NO. _____

TYPE HFW5A RELAY

HFW5A1131K00