


Product description	M8 female panel mount connector, Contacts: 4, unshielded, dip-solder, IP67, M12x1.0, front mounting
Area	M8 series 718
Order number	86 6518 1100 00004


Illustration




Conductor layout

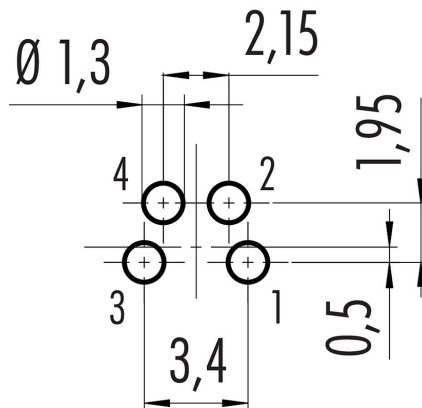

Scale drawing

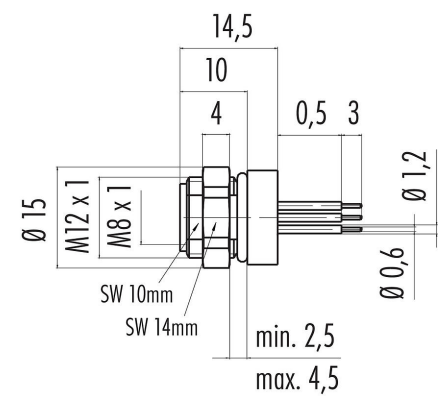

Contact arrangement (Plug-in side)

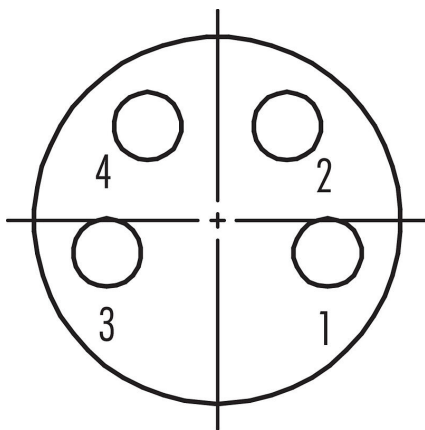

You can find the assembly instructions on the next page.

Technical data

General features

Order number	86 6518 1100 00004 Alternative order number: 09 3390 186 04
Notice	Please note that, due to the change from the old to the new order number, there may be deviations in the technical specifications. For questions about product details, please use the 'Contact Customer Service' form on the right.

Product description	M8 female panel mount connector, Contacts: 4, unshielded, dip-solder, IP67, M12x1.0, front mounting
Area	M8 series 718
Order number	86 6518 1100 00004

Connector design	female panel mount connector
Version	connector female straight
Connector locking system	screw
Termination	dip-solder
Degree of protection	IP67
Temperature range from/to	-40 °C / 85 °C
Mechanical operation	> 100 Mating cycles
Weight (g)	12.23
Customs tariff number	85369010

Electrical parameters

Rated voltage	60 V
Rated impulse voltage	1500 V
Rated current (40 °C)	4 A
Pollution degree	3
Overvoltage category	II
Insulating material group	II
EMC compliance	unshielded

Material

Housing material	CuZn (Brass nickel plated)
Contact body material	PA black
Contact material	CuSn (bronze)
Contact plating	Au (gold)
Contact length	0.5 mm
REACH SVHC	CAS 7439-92-1 (Lead)
SCIP number	8a2ca6a0-0c4e-44cc-bf09-35529b9d1eb7

Classifications

eCl@ss 11.1	27-44-01-09
ETIM 7.0	EC003569

Product description	M8 female panel mount connector, Contacts: 4, unshielded, dip-solder, IP67, M12x1.0, front mounting
Area	M8 series 718
Order number	86 6518 1100 00004

Security notices

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.