



DIMENSIONS

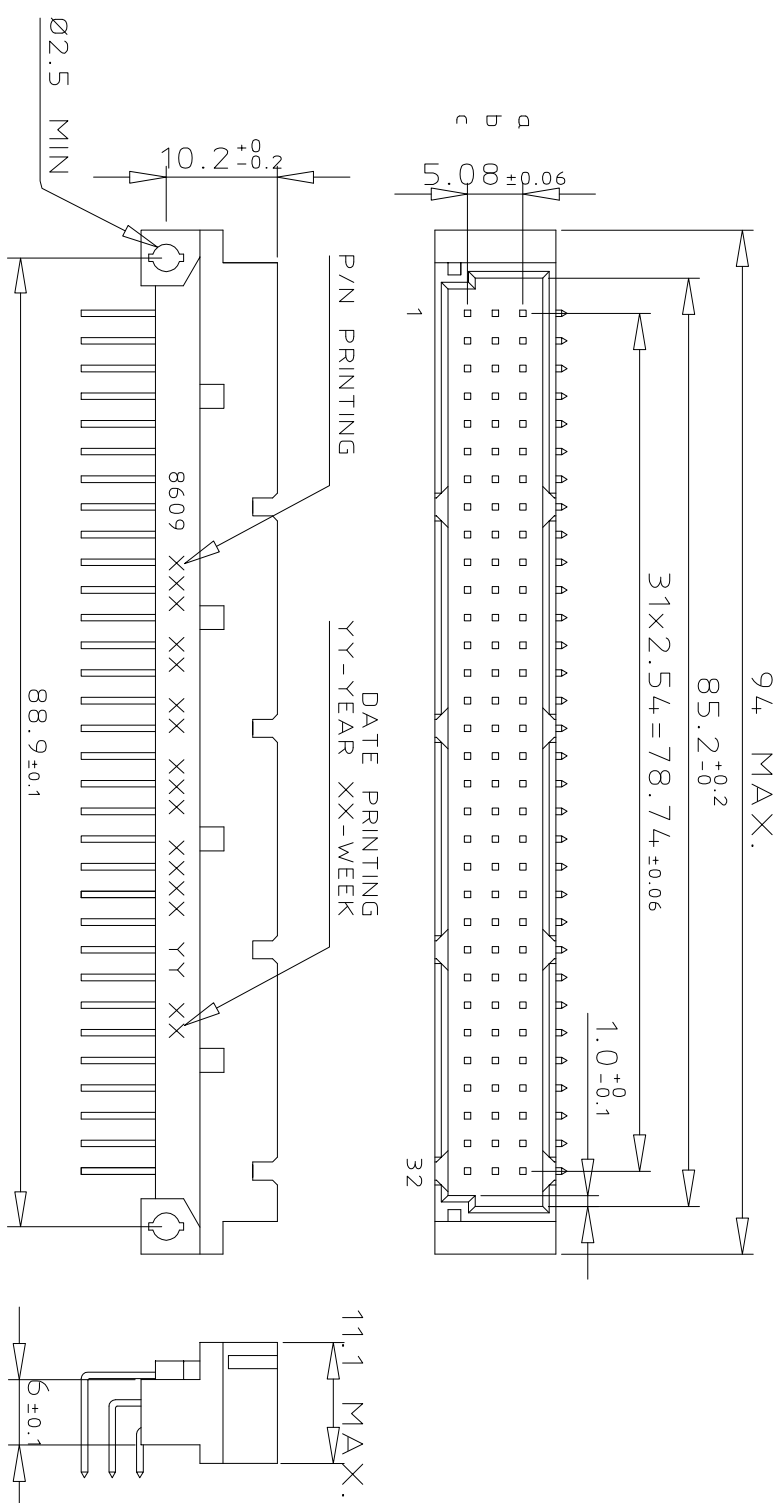


TERMINATION

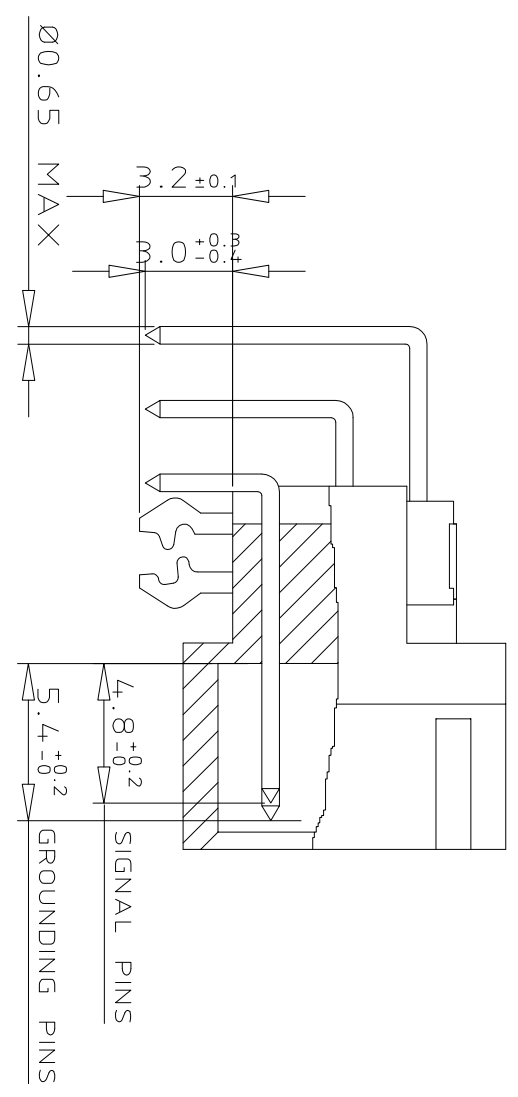

ORDERING INFORMATION

SERIES	8609	3	63	7	1	13	7	5	0	NDLF	
ROWS FITTED WITH CONTACTS	Row a	b	c								
NO. OF CONTACTS				63							
TYPE OF INSULATOR	3 ROW MALE INSULATOR										
METHOD OF MOUNTING	STANDARD MOUNTING - STYLE C										
TERMINATION	ANGLED SPILL										
OPTIONS	NO. OPTION WITH HARPOONS										
PERFORMANCE CLASS	DIN 41612 CLASS 3										
	DIN 41612 CLASS 2										
	DIN 41612 CLASS 1										
	AS PER MIL C 55302 / JSS 50808										
PITCH PER ROW	MIXED PITCH										
LEAD FREE VERSION SPL CONTACTS LOADING	NDLF										

CONTACT ARRANGEMENT

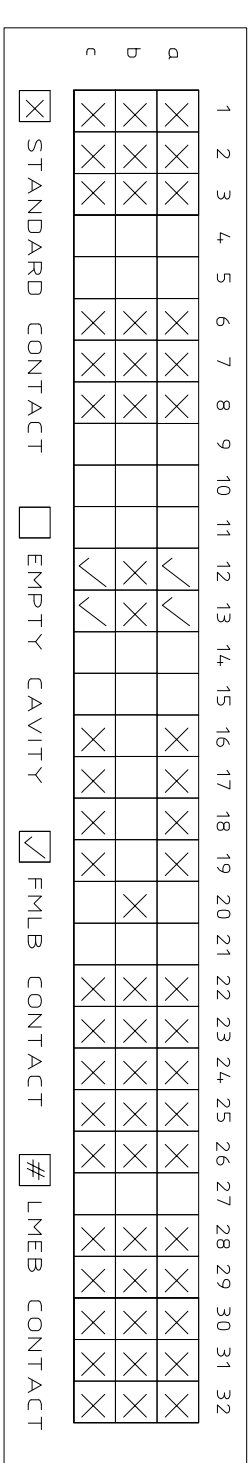

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	

STANDARD CONTACT
 EMPTY CAVITY
 FMLB CONTACT
 LMEB CONTACT

GENERAL CHARACTERISTICS & ROHS INFO
 REFER DRAWING C-8609-0000A

mot'l. code	SEE DRAWING C-8609-0000A	surface	ISO 1302	tolerance	ISO 406	ISO 1101	projection	product family	8609
tr	ecn	no	dr	ddte	tolerances unless otherwise specified		mm scale 3:2	title	DIN STANDARD HEADER
A	105-0166	MINI	2005-09-22	angles	0.X	±0.1		ANGLED SPILL DIN 41612 STYLE C	
B	105-0283	MINI	2005-12-31	linear	0.XX	±0.1			
C	106-0064	MINI	2006-06-01	0*2*	0.XXX	±0.1	scdce 3:2		
D	107-0111	KR	2007-09-05	dr	MINI	K	V	2005-09-22	
E	108-0146	KR	2008-10-21	engr	RAKHEE	G		2005-09-22	
		chr			KESAVAN	R		2008-10-21	
		pppd			KESAVAN	R		2008-10-21	
sheet	revision	E							
index	sheet	1							



dwg no C-8609-2055 sheet 1 of 1 size A3
 type Product Customer Drawing