




SIZE	Part Num.	Threading
25	8655MHRA2501LF	UNC 4.40
25	8655MHRA2502LF	M3

NOTES:

Material and finish: Zinc die-cast  
nickel plated  
Cable strain relief: Steel fibre reinforced  
Polycarbonate (UL94V-0)  
for EMI/RFI screening  
Jackscrew: Metal, threading according table  
Temperature range: -40°C to 120°C  
Cable diameter: 4.0 to 13.0mm  
Attenuation factor: >40 dB between 30MHz  
and 1 GHz  
Packaging: Bulk, in box of 100 P/N  
Covers screwing force (max): 100Ncm  
Jackscrew screwing force (max): 75 Ncm



NOTE:RoHS INFORMATIONS

-The "LF" product meets European union Directives  
and other country regulations as described in  
GS-22-008.  
-The product is not intended to be exposed to a  
manufacturing solder process.  
-Packaging spec: see GS-14-920.

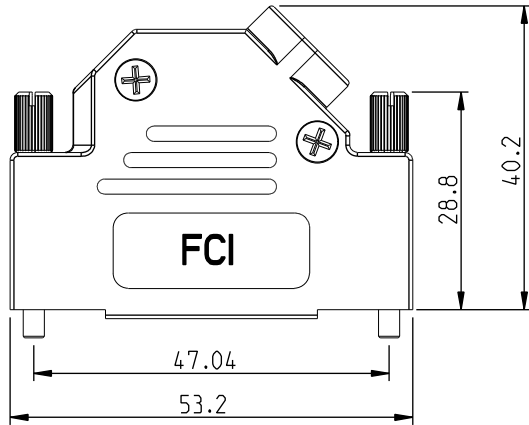

VERSION SCREW M3

DESIGNATION	REP.	09	15	25	37
COVER BOTTOM	1			1	
JACKSCREW	2	1		2	
STRAIN RELIEF	3			2	
COVER TOP	4			1	
SCREW POZIDRIVE	5			2	

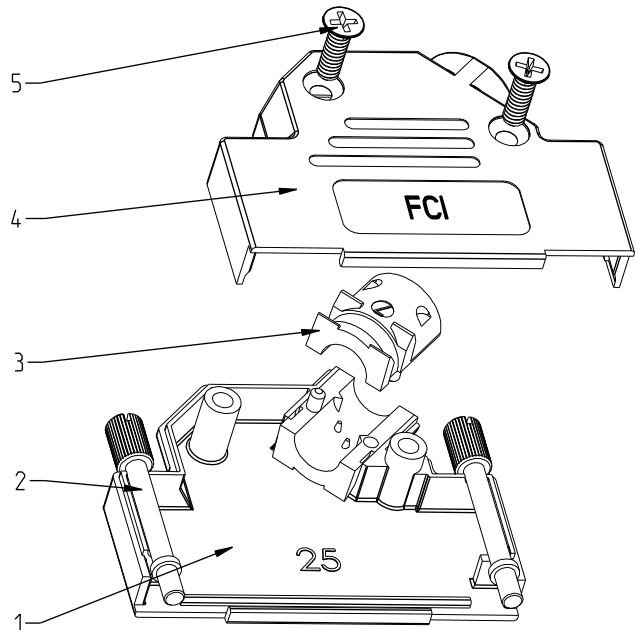



rev	ecn no	dr	date
A	LS05-0086	MPE	2005/10/15
B	LS06-0084	LGO	2006/06/20
C	LS07-0096	LGO	2007/04/04
D	F09-0223	LSA	2009/11/24
E	F09-0236	LSA	2009/12/22
-	-	-	-
-	-	-	-

www.fciconnect.com		surface	tolerance std	projection	mm
		ISO 1302	ISO 406 ISO 1101		
TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	BART.S	2005/10/15	ANGULAR	0.x	±/
Eng	LENOIR.M	2005/10/15	LINEAR	0.xx	±/
Chr	LEGARE.P	2005/10/15	0° ±/°	0.xxx	±/
Appr	LEGARE.P	2005/10/15	Product family	D-SUB HOODS	Spec ref
FCj		Title		D-SUB METAL SHELLS	
		ANGLED		10061512C	
catalog no		8655MHRAxx0xLF		sheet 1 of 3	


Copyright FCI.

SIZE	Part Num.	Threading
09	8655MHRA0901LF	UNC 4.40
09	8655MHRA0902LF	M3

SIZE	Part Num.	Threading
15	8655MHRA1501LF	UNC 4.40
15	8655MHRA1502LF	M3

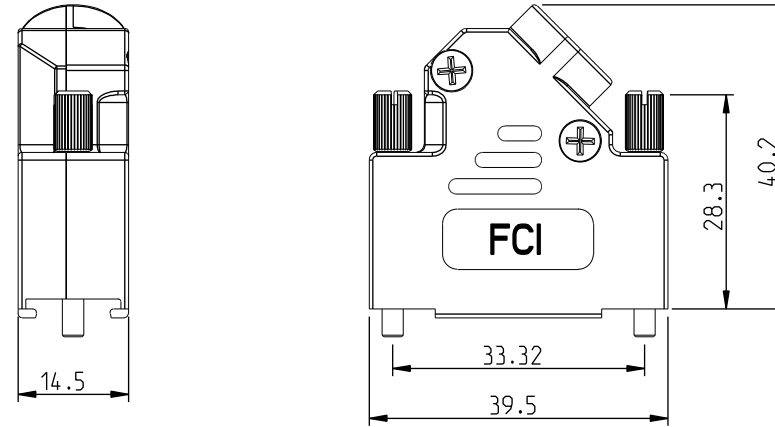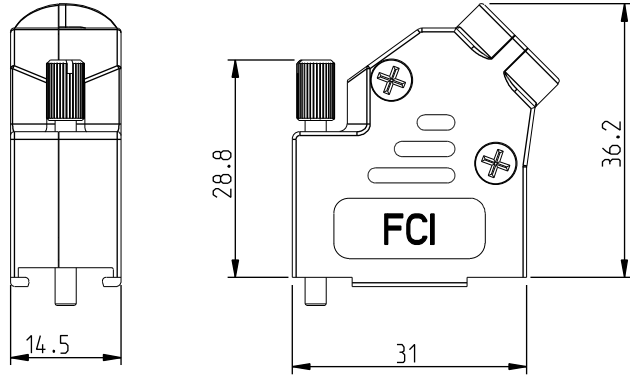

SIZE	Part Num.	Threading
37	8655MHRA3701LF	UNC 4.40
37	8655MHRA3702LF	M3

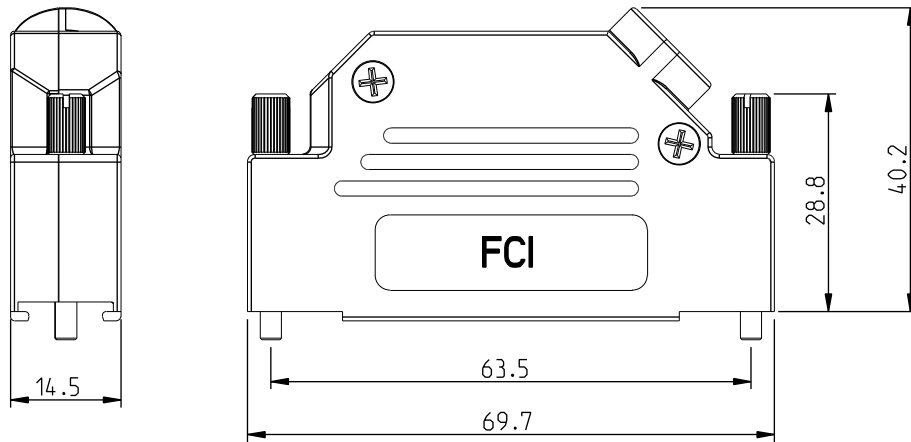


Copyright FCI.


www.fciconnect.com		Surface ISO 1302	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	BART.S	2005/10/15	ANGULAR	0.x ±/
Eng	LENOIR.M	2005/10/15	LINEAR	0.xx ±/
Chr	LEGARE.P	2005/10/15	0° ±/°	0.xxx ±/
Appr	LEGARE.P	2005/10/15	Product family	D-SUB HOODS
size				A3
Scale				3:2
ECN				F09-0223
Spec ref				
Title		D-SUB METAL SHELLS		Rev.
ANGLED		8655MHRAxx0xLF		E
catalog no		10061512C		sheet 2 of 3

## CABLING INSTRUCTIONS


1- Use two halves of strain relief, different sizes can be mixed (Ø4, 5, 7 or 9)

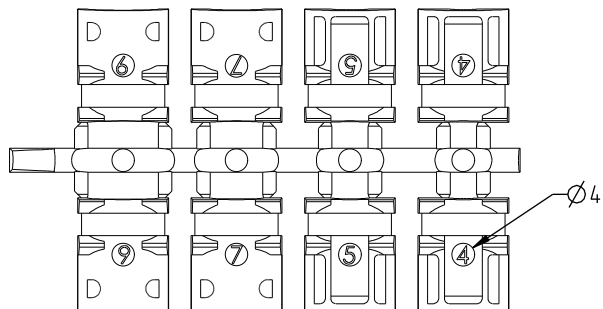


2- Strip cable 18mm and shape to two pigtails

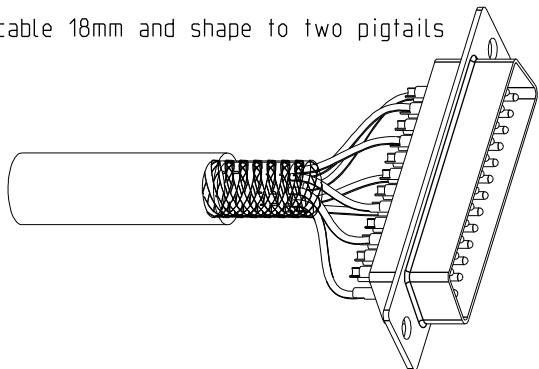


3- Attach the strain relief around the cable

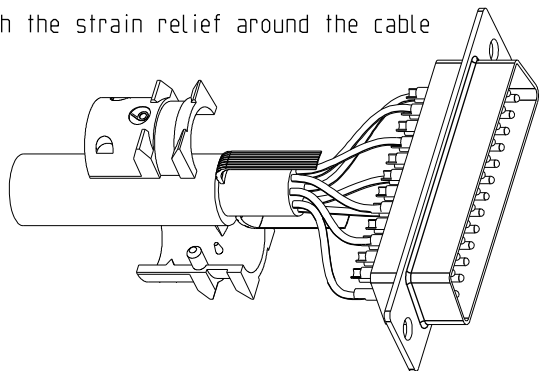


4- Bend cable shielding back on outside of strain relief

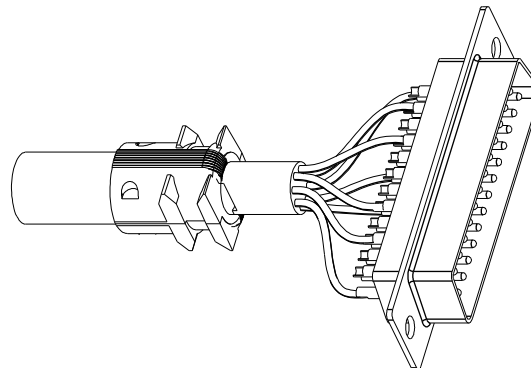

5- Mount connector and cable into the backshell

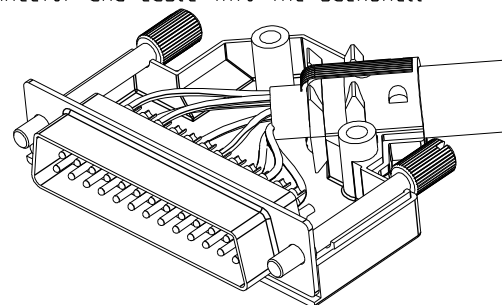

6- Assemble the other half screwing force: 100 Ncm

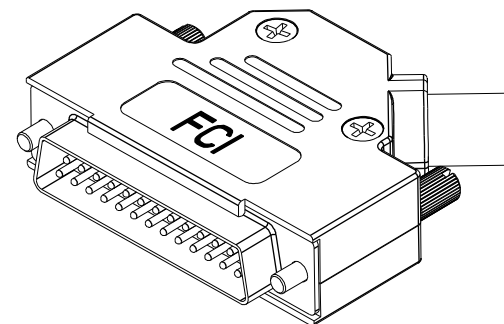

Copyright FCI.

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	BART.S	2005/10/15	ANGULAR	0.x	±/
Eng	LENOIR.M	2005/10/15	LINEAR	0.xx	±/
Chr	LEGARE.P	2005/10/15	0° ±/°	0.xxx	±/
Appr	LEGARE.P	2005/10/15	Product family	D-SUB HOODS	Spec ref
		title		Rev.	
		D-SUB METAL SHELLS		10061512C	
		ANGLED		E	
		catalog no		8655MHRAx0xLF	
				sheet 3 of 3	