


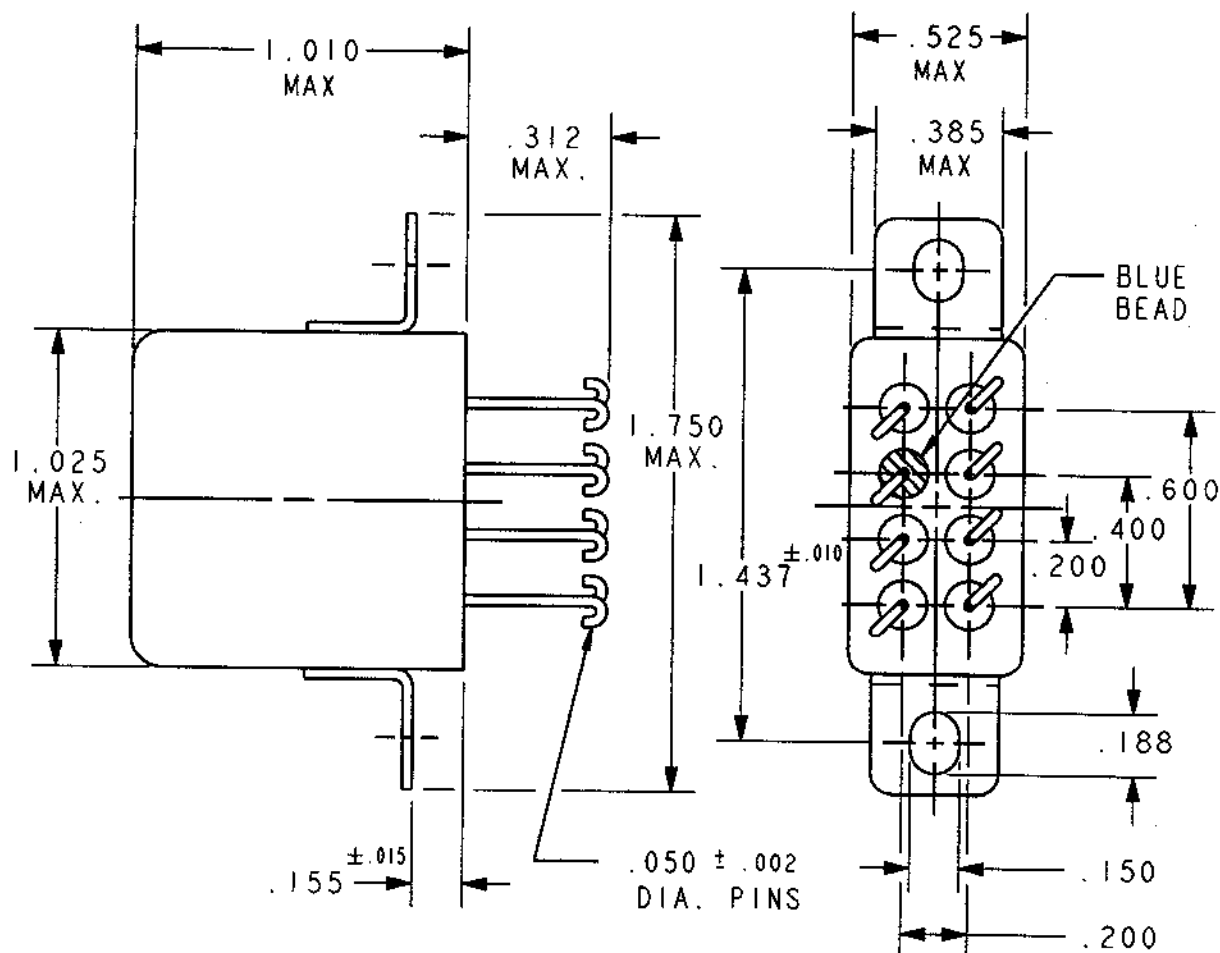


REV. 2
DCO 102710

COIL: @ 25°C
 RESISTANCE 170 OHMS ±10%
 NOMINAL VOLTAGE 18.0 VDC
 MUST OPERATE 9.7 VDC
 MUST RELEASE 5.4 VDC MAX, 1.2 VDC MIN

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 50 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 15 MS MAX.
 OPERATE BOUNCE 5 MS MAX.
 RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

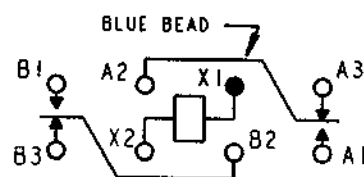

TERMINAL VIEW

CONTACT RATING: 10 AMPS 28 VDC
 5 AMPS 115 VAC/400 Hz RESISTIVE
 50,000 OPERATIONS

DR. BSH 8/17/01 CK. TLG 8-17-01

CII Technologies
 advanced control electronic solutions

CUST. QPL
 CUST. NO. M5757/23-037 REV.

"07" RELAY

B07D632BZ2-0353