

VSPC 1CL 5VDC

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com



Analogue signal/current loop (CL) protection includes the following signals:

- Signals from current loops (analogue measurements of sensors over long distances) 4 – 20 mA, 0 – 20 mA etc.
- Two-wire, three-wire and four-wire, without a common reference potential
- e.g. level indication signals from voltage sensors (analogue measurements of sensors over short distances) 0 – 10 V, PT 100 etc. ; e.g. temperature measurement
- Pluggable arrester, with interruption-free and impedance-neutral plug-in and pull-out
- Can be tested with the V-TEST testing device
- Version with floating-earth PE connection used to avoid differences in potential
- Can be used in compliance with the IEC 62305 (D1, C1, C2 and C3) installation standard
- Integrated PE foot safely discharges up to 20 kA (8/20 μ s) and 2.5 kA (10/350 μ s) to the PE
- Colour coding of the voltage levels for fast identification on the panel
- Safety function through coding elements for different voltage levels

General ordering data

| | |
|------------|--|
| Version | Surge protection for instrumentation and control, without warning function / function indicator, $U_P(L/N-PE) < 800$ V |
| Order No. | 8924420000 |
| Type | VSPC 1CL 5VDC |
| GTIN (EAN) | 4032248696055 |
| Qty. | 1 pc(s). |

VSPC 1CL 5VDC
Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com
www.weidmueller.com
Technical data
Dimensions and weights

| | | | |
|------------|---------|-----------------|------------|
| Depth | 69 mm | Depth (inches) | 2.717 inch |
| Height | 90 mm | Height (inches) | 3.543 inch |
| Width | 17.8 mm | Width (inches) | 0.701 inch |
| Net weight | 39 g | | |

Temperatures

| | | | |
|---------------------|----------------|-----------------------|----------------|
| Storage temperature | -40 °C...80 °C | Operating temperature | -40 °C...70 °C |
| Humidity | 5...96 % | | |

Probability of failure

| | | | |
|-----------------|-------------|-----------------------------------|---------|
| SIL PAPER | SIL Paper | SIL in compliance with IEC 61508 | 3 |
| MTTF | 2,537 Years | SFF | 95.67 % |
| λ_{ges} | 45 | PFH in $1 \cdot 10^{-9}$ per hour | 1.95 |

Rated data UL

| | | | |
|----------------------|---------|----------------|---------------------|
| Certificate No. (UL) | E311081 | UL certificate | UL 497b Certificate |
|----------------------|---------|----------------|---------------------|

CSA protection data

| | | | |
|-------------------------------|------|---------------------------------|-----------|
| Gas group C | IIB | Gas group D | IIA |
| Gas groups A, B | IIC | Input voltage, max. U_i | 6.4 V |
| Internal capacity, max. C_i | 1 nF | Internal inductance, max. L_i | 0 μ H |

General data

| | | | |
|--------------------------|--|---------------------------|-------------------------|
| Colour | orange | Design | Terminal, miscellaneous |
| Optical function display | No | Protection degree | IP20 |
| Segment | Measurement - Monitoring - Setting | UL 94 flammability rating | V-0 |
| Version | without warning function / function indicator | protected current loops | 1 |

Insulation coordination acc. to EN 50178

| | | | |
|--------------------|---|------------------------|-----|
| Pollution severity | 2 | Surge voltage category | III |
|--------------------|---|------------------------|-----|

VSPC 1CL 5VDC

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

Technical data

Rated data IEC / EN

| | | | |
|---|-------------------------------|---|-----------------------|
| Discharge current I_{\max} (8/20 μ s) GND-PE | 10 kA | Discharge current I_{\max} (8/20 μ s) wire-PE | 10 kA |
| Discharge current I_{\max} (8/20 μ s) wire-wire | 10 kA | Discharge current I_n (8/20 μ s) GND-PE | 2.5 kA |
| Discharge current I_n (8/20 μ s) wire-PE | 2.5 kA | Discharge current I_n (8/20 μ s) wire-wire | 2.5 kA |
| Fuse | 0.5 A | Lightning test current, I_{imp} (10/350 μ s) GND-PE | 2.5 kA |
| Lightning test current, I_{imp} (10/350 μ s) Wire-PE | 2.5 kA | Lightning test current, I_{imp} (10/350 μ s) wire-wire | 2.5 kA |
| Max. continuous voltage, U_c (DC) | 6.4 V | Number of poles | 1 |
| Overload - failure mode | Modus 2 | Protection level U_p (typ.) | < 800 V |
| Protection level on output side Wire-PE 1kV/ μ s, typically | 450 V | Protection level on output side Wire-wire 1 kV/ μ s, typically | 12 V |
| Protection level on output side Wire-wire 8/20 μ s, typically | 12 V | Protection level, U_p GND - PE | 650 V |
| Protection level, U_p wire - PE | 450 V | Protection level, U_p wire - wire | 12 V |
| Pulse-reset capacity | ≤ 20 ms | Rated current I_N | 450 mA |
| Rated voltage (DC) | 5 V | Requirements category acc. to IEC 61643-21 | C1, C2, C3, D1 |
| Signal transmission properties (-3 dB) | 730 KHz | Signalling contact | No |
| Standards | IEC 61643-21, HART-compatible | Surge current-carrying capacity C1 | < 1 kA 8/20 μ s |
| Surge current-carrying capacity C2 | 5 kA 8/20 μ s | Surge current-carrying capacity C3 | 100 A 10/1000 μ s |
| Surge current-carrying capacity D1 | 2.5 kA 10/350 μ s | Voltage type | DC |
| Volume resistance | 2.20 Ω | | |

Further details of approvals

GOST certificate GOST-Zertifikat

Connection data

Type of connection Pluggable in VSPC BASE

Ratings IECEx/ATEX/cUL

cUL certificate cUL Certificate

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC000943 | ETIM 7.0 | EC000943 |
| ETIM 8.0 | EC000943 | ECLASS 9.0 | 27-13-08-07 |
| ECLASS 9.1 | 27-13-08-07 | ECLASS 10.0 | 27-13-08-07 |
| ECLASS 11.0 | 27-13-08-07 | ECLASS 12.0 | 27-17-90-90 |

VSPC 1CL 5VDC

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

Technical data

Tender specification sheets

| | | | | |
|--------------------|--|---------------------|--|---|
| Long specification | Surge protection plug for use in connection with the base element VSPC BASE 1CL for one floating-ground driven paired cable. Two-stage protection circuit consisting of coarse protection, decoupling resistors and fine protection between the signal wires and coarse common mode voltage protection to earth. Mechanical identification of the plug to the base element according to the switching type and rated voltage. Optical identification of the protected plug based on the type of protected switching and the voltage level. Protected plug with coding pin and counter-profile for the base element. It is possible to mark the plug. | Short specification | www.weidmueller.com | Surge protection plug for base element VSPC BASE 1 CL FG, transverse voltage coarse and fine protection for one floating-ground powered paired cable, coarse common mode voltage protection to earth. Version: 5 V DC |
|--------------------|--|---------------------|--|---|

Environmental Product Compliance

| | |
|------------|--------------------------------------|
| REACH SVHC | Lead 7439-92-1 |
| SCIP | 71e97bb7-979f-4330-94c0-20c629bb05e3 |

Important note

| | |
|---------------------|--|
| Product information | Mode 2: State where the voltage-limiting part of the SPD was short-circuited due to a very low impedance within the SPD. The line is inoperable, but the measuring equipment is still protected by means of a short-circuit. |
|---------------------|--|

Approvals

Approvals



| | |
|-----------------------|------------|
| ROHS | Conform |
| UL File Number Search | UL Website |
| Certificate No. (UL) | E311081 |

Downloads

| | |
|---|--|
| Approval/Certificate/Document of Conformity | SIL Paper EU Konformitätserklärung / EU Declaration of Conformity |
| Engineering Data | CAD data – STEP |
| Engineering Data | WSCAD |
| User Documentation | Beipackzettel / Instruction sheet |
| Catalogues | Catalogues in PDF-format |
| Brochures | |

Creation date December 30, 2022 1:45:44 PM CET

Catalogue status 16.12.2022 / We reserve the right to make technical changes.

Data sheet

VSPC 1CL 5VDC

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold


Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

Drawings

Electric symbol

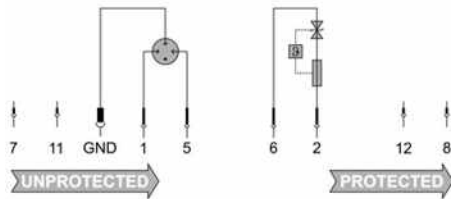

Circuit diagram

| Cate- gory | Testing pulse | Surge voltage | Surge current | Pulse | Type |
|---------------|--------------------------|---------------------------------|----------------------------------|-------|--|
| C1 | Quick- rising edge | 0.5 - 2 kV with 1.2/50 µs | 0.25 - 1 kA mit 8/20 µs | 300 | Surge voltage arrester |
| C2 | Quick- rising edge | 2 - 10 kV with 1.2/50 µs | 1 - 5 kA mit 8/20 µs | 10 | Surge voltage arrester |
| C3 | Quick- rising edge | ≥ 1 kV with 1 kV/µs | 10 - 100 A mit 10/10000 µs | 300 | Surge voltage arrester |
| D1 | High power | ≥ 1 kV | 0.5 - 2.5 kA mit 10/350 µs | 2 | Arrester for lightning current and surge voltages |

Discharge capacity

