

REV.	SPECIFICATION	ECN NO.	APPD.
R1			

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Shell: Copper Alloy.

Back Cover: Metal.

Electrical Characterstics:

Voltage Rating: AC 30V.

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 500V for 1 minute.

Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -55C~+85°C.





Mechanical Characteristics:

Mating Force: 35N Max.


Unmating Force: 10N Max.

Durability: 1500 Cycles.

***RoHS Compliant**

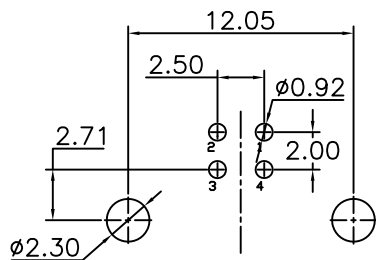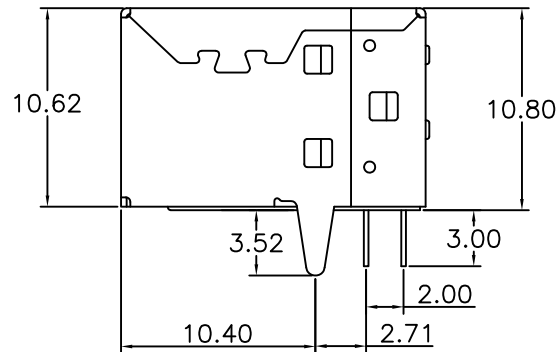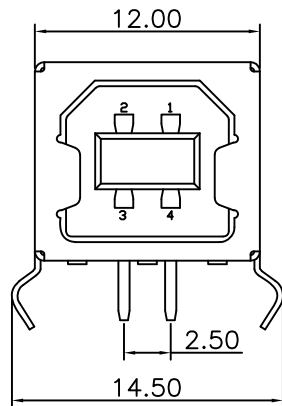

P.C. Board Layout



8968-B 04 C 00 R x 2 A
Series Position C: Selective 00: G/F R: Right W: White 2: Type 2 A: Tray
Gold Plated 30: 30 μ" Angle B: Black Package

Tolerances	Dwg No.	8968D00029		Title: 8968 Series USB B Type		 OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
x = ±0.50	Projection					P/N: 8968-B04C00Rx2A			
.x = ±0.30	Unit	mm	Scale	1:1	SHEET 1/1 Ver.No. A2				
.xx = ±0.25	Drawn By	Vic Lyu01/21'16		785					