

Instrument isolating terminal thermoplast Screw terminal on both sides with test socket, 8mm, Sz. 6

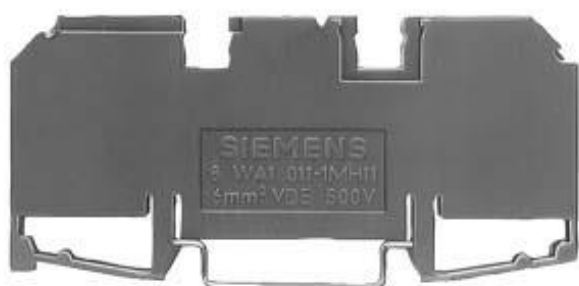






Figure similar

Model	
Product brand name	ALPHA
Type of longitudinal separation	sliding
Type of lateral separation	without
Design of terminal / Terminal levels internally linked	No
General technical data	
Insulation material	thermoplastic
Terminal contact spacing	8 mm
Operating voltage / rated value	600 V
Protection class	
Combustibility class acc. to UL 94	V2
Main circuit	
Operating current / rated value	35 A
Appearance	
Color	beige

Product details	
Product component	
<ul style="list-style-type: none"> • required / connection plate 	No
<ul style="list-style-type: none"> • Test socket 	Yes
Number	
Number of terminal levels	1
Number of terminal points / per terminal level	2
Connections	
Connectable conductor cross-section / solid	
<ul style="list-style-type: none"> • minimum 	6 mm ²
<ul style="list-style-type: none"> • maximum 	6 mm ²
Connectable conductor cross-section / stranded	
<ul style="list-style-type: none"> • minimum 	1.5 mm ²
<ul style="list-style-type: none"> • maximum 	6 mm ²
Connectable conductor cross-section / finely stranded	
<ul style="list-style-type: none"> • with core end processing / minimum 	6 mm ²
<ul style="list-style-type: none"> • with core end processing / maximum 	6 mm ²
<ul style="list-style-type: none"> • without core end processing / minimum 	6 mm ²
<ul style="list-style-type: none"> • without core end processing / maximum 	6 mm ²
Type of electrical connection	
<ul style="list-style-type: none"> • 1 	screw-type terminal
<ul style="list-style-type: none"> • 2 	screw-type terminal
Position / of the terminal	lateral
Mechanical Design	
Height / with lowest-profile installation	33 mm
Length	83 mm
Mounting type	DIN rail 35 mm
Material / of the insulating body	Thermoplast
Environmental conditions	
Ambient temperature / during operation	
<ul style="list-style-type: none"> • minimum 	-25 °C
<ul style="list-style-type: none"> • maximum 	55 °C
Certificates	

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval	other
 CSA	 UR	 EG-Konf.	Miscellaneous	 BUREAU VERITAS
				Environmental Confirmations

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WA1011-1MH15>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WA1011-1MH15>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WA1011-1MH15

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>