
Data Sheet | Item Number: 770-645

Lockout cap; 5-pole; for cutouts; Plastic; black

https://www.wago.com/770-645

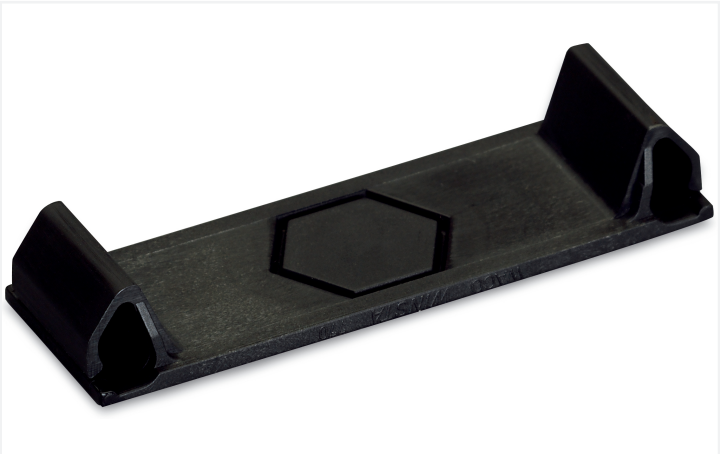

Color: ■ black

Cover *WINSTA*® MIDI 5-pole

The cover from the *WINSTA*® MIDI product line guarantees you the maximum flexibility in electrical installation. You can rely on the quality of WINSTA® components from WAGO for your electrical installation accessories too. *WINSTA*® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is found in a broad range of individual products you can use for quick, easy, flexible, and secure installation.

WINSTA® MIDI solutions for your electrical installation – protected against mismating and maintenance-free

The WINSTA® Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and therefore faster, more reliable, and error-free. Using this pre-assembled system decreases time spent on assembly and errors during installation at the construction site. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismating from WAGO.

- simple circuits
- convenient installation and commissioning

Notes

General safety information	**NOTICE: Observe installation and safety instructions!** 1. Only to be used by a qualified electrician or by a person electrically instructed for the task (EIP per DIN VDE 0105-100). 2. Do not install while energized or under load. 3. Use only for its intended purpose. 4. Observe applicable national regulations, standards and directives. 5. Observe the technical specifications of the products. 6. Ensure correct polarity assignment. 7. Do not use damaged or contaminated components. 8. Observe conductor types, conductor cross-sections, strip lengths and cable diameters. 9. Insert conductors up to the stop. 10. Use only with locking lever and strain relief. 11. Use original accessories only. **To be sold only with installation instructions!**
Note	The snap-in connectors must be relieved of tensile and transverse forces. A surface finish can influence the edge radius of the cutouts. This may affect the snap-in socket fit, so ensure an adequate fit before use. In addition, the punched edge should be on the inside for punched cutouts. The wings of the snap-in connectors must not be mechanically stressed for a long period before use (e.g., due to a pre-locking position).

Connection Data

Connection 1

Pole number	5

Mechanical data

Mounting type	Snap-in flange
Suitable	for cutout

Material data

Note (material data)	Information on material specifications can be found here
Color	black
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.068 MJ
Weight	2.3 g

Environmental requirements

Processing temperature	-5 … +40 °C
Continuous operating temperature	-35 … +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

Product Group	20 (Winsta)
PU (SPU)	100 pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332755467
Customs tariff number	39269097900

Product Classification

UNSPSC	39121703
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 9.0	EC002863
ETIM 10.0	EC002863
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Continued on next page

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-645

Documentation

Bid Text

770-645	19.02.2019	xml 2.57 KB
770-645	13.01.2015	doc 22.50 KB

CAD/CAE-Data

CAD data

2D/3D Models 770-645

CAE data

WSCAD Universe 770-645

ZUKEN Portal 770-645