


4

3


2

1


LOC G	DIST 02	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			F3	REVISED PER ECO-11-004917	11MAR11	RK	HMR

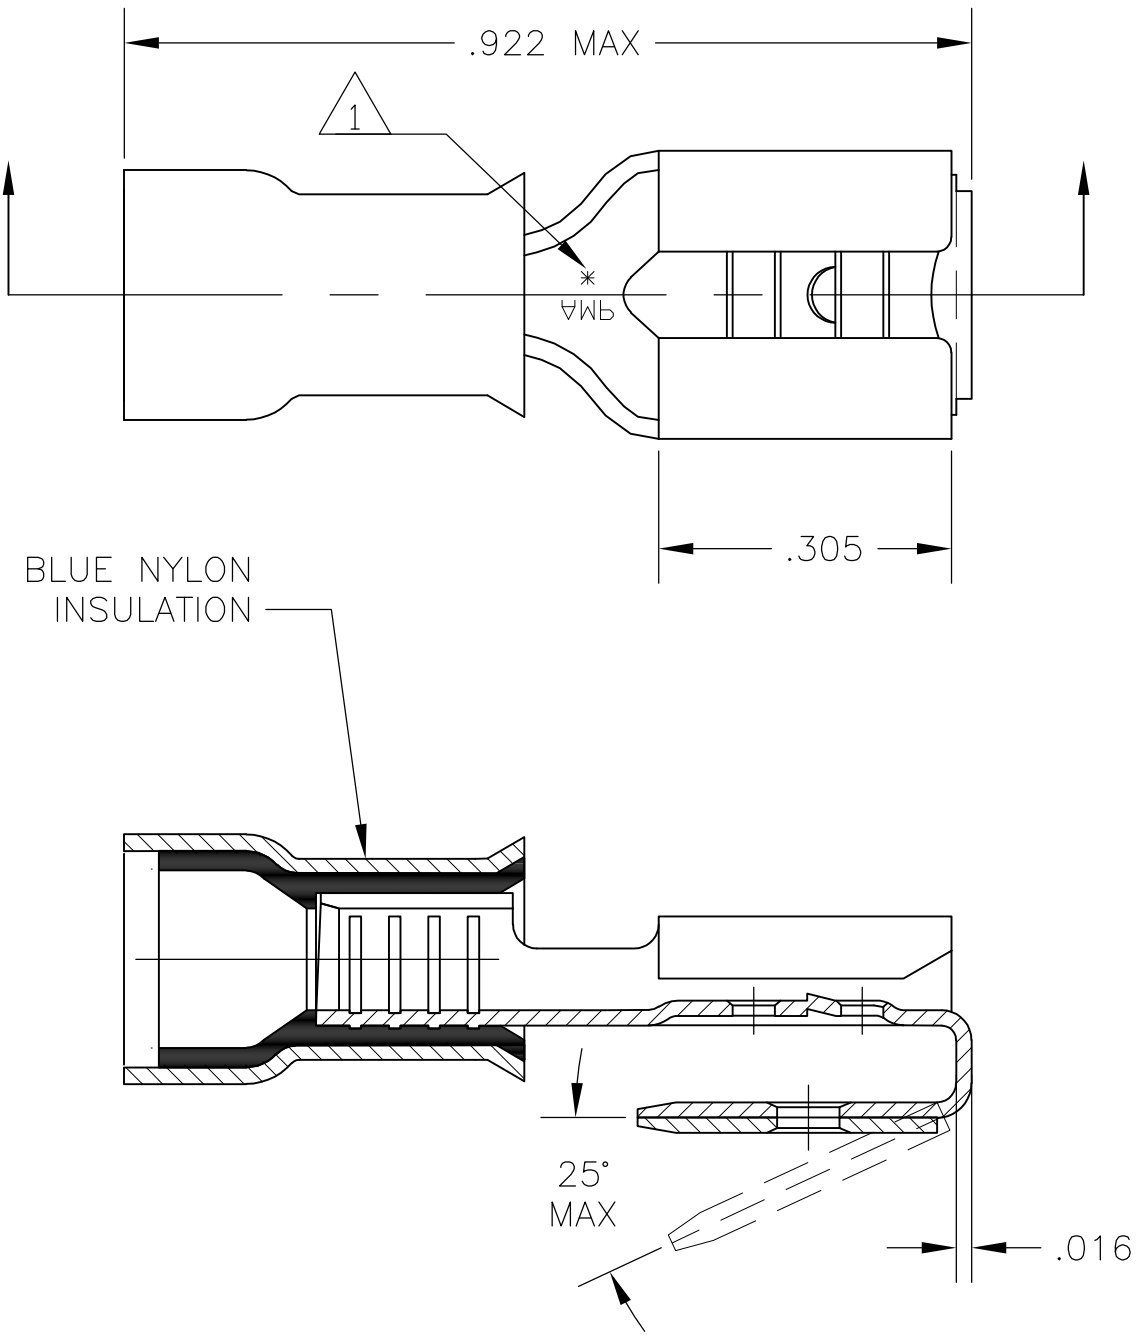

- 1 MATING TAB THICKNESS .032
- 2 ASTERISK * FOR PHOS. BRONZE ITEMS ONLY.
- 3 WIRE INSULATION DIA TO BE .170 MAX.
- 4 MAX RECOMMENDED OPERATING TEMP IS 105°C OR 221°F.
- 5 VOLTAGE RATING IS 300V MAX
- 6 CIRCULAR MIL AREA 1.0-2.5mm2 [1973-4934].

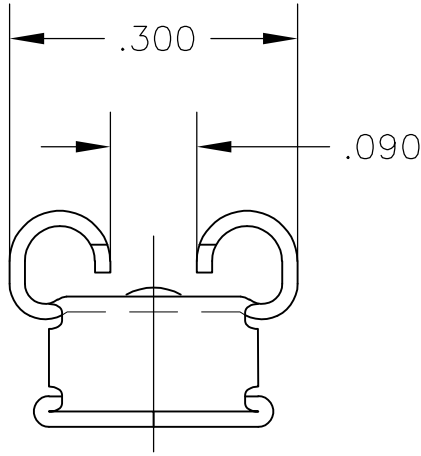

PHOS BRONZE ELECTRO-TIN	9-160463-5
BRASS ELECTRO-TIN	9-160463-2
DESCRIPTION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN jr ruth	11JUL05	TE Connectivity			
DIMENSIONS: INCHES		CHK T MICHELUTTI	11JUL05				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T MICHELUTTI	11JUL05	NAME 250 SERIES P.I.D.G. FASTON REC, ASS'Y, PIGGYBACK WIRE SIZE : 16-14 AWG		
	0 PLC ± - 1 PLC ± - 2 PLC ± .02 3 PLC ± .005 4 PLC ± - ANGLES ± 0°30'		PRODUCT SPEC —				
	MATERIAL —		APPLICATION SPEC —				
	FINISH —		WEIGHT —				
		CUSTOMER DRAWING		SIZE A3	CAGE CODE 00779	DRAWING NO C-160463	RESTRICTED TO —
				SCALE 5:1	SHEET 1 OF 1	REV F3	