

Strip Block for Snap-in Mounting with up to 7 IEC Appliance Outlets F




Snap-In Version



Snap-In Version



Snap-In Version

**Description**

- Panel Mount:
Snap-in version from front side 1 Function:
- Module of 2 up to 7 outlets,
- Pin temperature 70 °C, Protection class I
- Solder terminals

Characteristics

- Suitable for use in equipment according to IEC 60950

Other versions on request

- Other panel thickness


Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [CAD-Drawings](#), [Accessories](#), [Mounting instruction](#), [Detailed request for product](#)

Technical Data

Ratings IEC	10A / 250VAC; 50Hz	Appliance Outlet	F acc. to IEC 60320,
Ratings UL/CSA	15A / 250VAC; 60Hz		UL 498 CSA C22.2 no. 42 (for cold
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50Hz)		conditions) pin-temperature 70 °C, 10A,
Allowable Operation Temp.	-25 °C to 70 °C		Protection Class I
Degree of Protection	from front side IP 30 acc. to IEC 60529		
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140		
Terminal	Solder terminals		
Panel Thickness s	Snap-in 1.5 mm tolerance +0.0/-0.1		
Material: Housing	Thermoplastic, black, UL 94V-0		

Dimensions

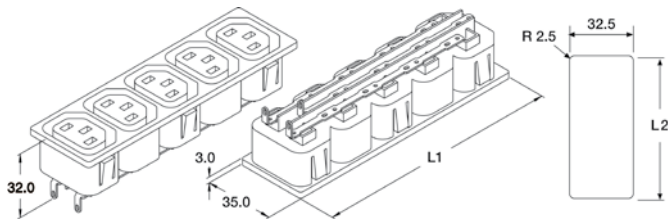

Variants

Panel Thickness s [mm]	Connector	Length L1 [mm]	Length L2 [mm]	Packaging unit	Order Number
1.5	2	51.2mm	48.3mm	120	0909.0001
1.5	3	75.2mm	72.3mm	80	0909.0011
1.5	4	99.2mm	96.3mm	60	0909.0021
1.5	5	123.2mm	120.3mm	40	0909.0031
1.5	6	147.2mm	144.4mm	40	0909.0041
1.5	7	171.2mm	168.4mm	32	0909.0051

Accessories

Description



[Cord retaining kits](#)
Cord retaining strain relief

Mating Inlets/Plugs

Category / Description

[Interconnection Cord Overview complete](#)



Interconnection Cord with IEC Plug E, Angled	0607
Interconnection Cord with IEC Plug E, Angled	0608
Interconnection Cord with IEC Plug E, Straight	0609
Interconnection Cord with IEC Plug G, Angled	607B
Interconnection Cord with IEC Plug G, Angled	608B
Interconnection Cord further types to 0909	...

[Plug Overview complete](#)

IEC Plug E, Cord Connector (Rewireable), Straight, max. cable Diameter 8.5 mm	4732
IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 8.5 mm	4733
IEC Plug E, Cord Connector (Rewireable), Straight, max. Cable Diameter 10 mm	4735
IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm	4736
IEC Plug E, Cord Connector (Rewireable), Straight	9009
Plug further types to 0909	...