

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [92318-1612](#)  
**Status:** **Active**  
**Overview:** [Picoflex®](#)  
**Description:** Picoflex® PF-50 IDT-Board-In Z-Style, 16 Circuits, 0.12m Length

**Documents:**

[3D Model](#) [Product Specification PS-99020-0011 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**General**

|                        |                           |
|------------------------|---------------------------|
| Product Family         | Cable Assemblies          |
| Series                 | <a href="#">92318</a>     |
| Connector to Connector | Picoflex® PCB-to-IDT      |
| Overview               | <a href="#">Picoflex®</a> |
| Product Name           | Picoflex®                 |
| UPC                    | 822350944687              |

**Physical**

|                                |  |
|--------------------------------|--|
| Cable Length                   | 0.12m                                    |
| Circuits (Loaded)              | 16                                       |
| Color - Resin                  | Natural                                  |
| Gender                         | Female-Female                            |
| Lock to Mating Part            | None                                     |
| Material - Metal               | Phosphor Bronze                          |
| Material - Plating Mating      | Tin                                      |
| Material - Plating Termination | Tin                                      |
| Material - Resin               | Polyester                                |
| Packaging Type                 | Bag                                      |
| Pitch - Mating Interface       | 1.27mm                                   |
| Plating min - Mating           | 2.032µm                                  |
| Plating min - Termination      | 2.032µm                                  |
| Single Ended                   | No                                       |
| Termination Interface: Style   | IDT or Pierce, Through Hole - Kinked Pin |
| Waterproof / Dustproof         | No                                       |
| Wire Insulation Diameter       | N/A                                      |
| Wire Size AWG                  | 28                                       |
| Wire/Cable Type                | PVC, Ribbon Cable                        |


**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 1.2A |
| Shielded                      | No   |
| Voltage - Maximum             | 250V |

**Material Info**

**Reference - Drawing Numbers**

|                       |               |
|-----------------------|---------------|
| Product Specification | PS-99020-0011 |
| Sales Drawing         | SD-92318-001  |

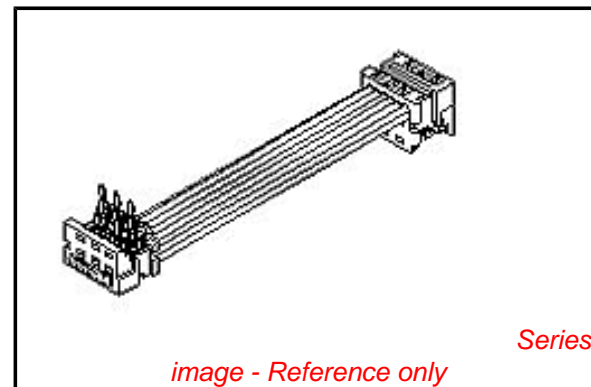

**EU RoHS**

**ELV and RoHS  
Compliant**  
**REACH SVHC  
Not Reviewed**  
**Low-Halogen Status  
Not Reviewed**

**China RoHS**



**Need more information on product  
environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[92318Series](#)

**Mates With**

Picoflex® PF-50 Header [90325](#) , [90800](#) ,  
[90779](#) , [90715](#) , [90814](#)