

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0930370751](#)  
**Status:** **Active**  
**Description:** 4CKT RAST 2.5 W/ PIP OEW RIB 3&4

**Documents:**


[Drawing \(PDF\)](#) [Packaging Specification PK-90871-001-001 \(PDF\)](#)  
[Product Specification PS-99020-0040-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Application Specification 990330008-000 \(PDF\)](#)

**Agency Certification**

CSA LR19980  
 UL E29179

**General**

Product Family IDT and Solder Connectors  
 Series [93037](#)  
 Comments "Various possibilities for temperature range: 4 Amp:-20°C to + 60°C with header 2 Amp:-20°C to +120°C double sided PCB or Header 2 Amp:-20°C to +110°C single sided PCB<P><P>This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.", "Various possibilities for temperature range: 4 Amp:-20°C to + 60°C with header 2 Amp:-20°C to +120°C double sided PCB or Header 2 Amp:-20°C to +110°C single sided PCB<P><P>This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher

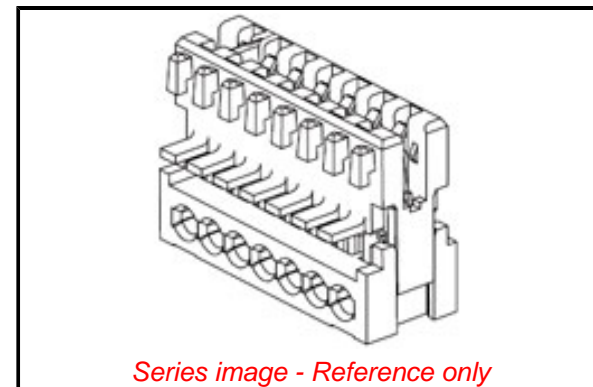

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per  
 -ED/88/2018 (15  
 January 2019)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[93037 Series](#)

Crimp Quality Equipment  
UPC

performance is required, please contact Molex for possible product options."

Yes  
884982112490

**Physical**

Flammability  
Net Weight

94V-2  
1.808/g

**Material Info**

**Reference - Drawing Numbers**

Application Specification  
Packaging Specification  
Product Specification  
Sales Drawing

990330008-000  
PK-90871-001-001  
PS-99020-0040-001  
930370001-000

This document was generated on 05/22/2019

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**