

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0930370752](#)
Status: **Active**
Description: 4CKT RAST 2.5 W/ PIP OEW RIB 3&4

Documents:


[Drawing \(PDF\)](#) [Packaging Specification PK-90871-001-001 \(PDF\)](#)
[Product Specification PS-99020-0040-001 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Application Specification 990330008-000 \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General

Product Family IDT and Solder Connectors
 Series [93037](#)
 Comments "Various possibilities for temperature range: 4 Amp:-20°C to + 60°C with header 2 Amp:-20°C to +120°C double sided PCB or Header 2 Amp:-20°C to +110°C single sided PCB<P><P>This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.", "Various possibilities for temperature range: 4 Amp:-20°C to + 60°C with header 2 Amp:-20°C to +120°C double sided PCB or Header 2 Amp:-20°C to +110°C single sided PCB<P><P>This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher

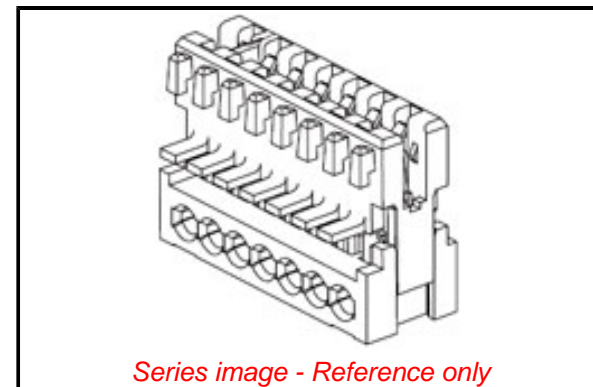

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per
 -ED/88/2018 (15
 January 2019)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[93037 Series](#)

Crimp Quality Equipment
UPC

performance is required, please contact Molex for possible product options."

Yes
883906559069

Physical

Flammability
Net Weight

94V-2
1.808/g

Material Info

Reference - Drawing Numbers

Application Specification
Packaging Specification
Product Specification
Sales Drawing

990330008-000
PK-90871-001-001
PS-99020-0040-001
930370001-000

This document was generated on 05/22/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION