

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [93050-0501](#)  
**Status:** **Active**  
**Overview:** [RAST 2.5 Connector System](#)  
**Description:** 2.50mm Pitch Appli-Mate RAST 2.5 Female Connector, 4 Circuits, Fully Coded, Glow Wire Compatible

**Documents:**

<a href="#">3D Model</a>	<a href="#">Application Specification AS-99033-0008 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Packaging Specification PK-90871-001 (PDF)</a>
<a href="#">Product Specification PS-99020-0040 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

**Agency Certification**

CSA	LR19980
UL	E29179


**General**

Product Family	IDT and Solder Connectors
Series	<a href="#">93050</a>
Comments	"This Molex product is manufactured from material that has the following ratings, tested by independent agencies: a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options."

Crimp Quality Equipment  
 Overview  
 Product Name  
 UPC  
 Use With

**Physical**

Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Natural
Durability (mating cycles max)	10
Flammability	94V-2
Gender	Female
Glow-Wire Compliant	Yes
Lock to Mating Part	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester
Net Weight	1.013/g

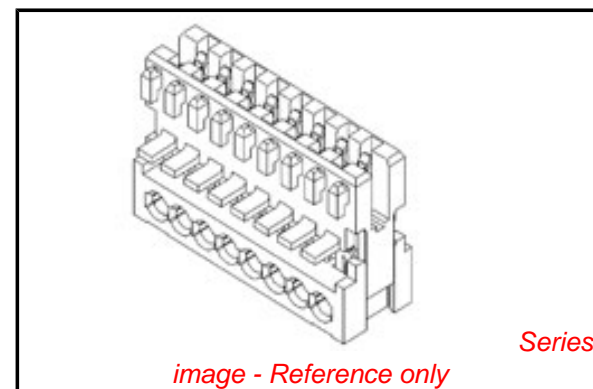

<b>EU RoHS</b> <b>ELV and RoHS</b> <b>Compliant</b> <b>REACH SVHC</b> <b>Contains SVHC: No</b> <b>Low-Halogen Status</b> <b>Not Low-Halogen</b>	<b>China RoHS</b> 
---	-----------------------

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[93050Series](#)

**Mates With**

[Appli-Mate RAST 2.5 Header 93070](#)

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
RAST 2.5 Semi-Automatic Terminator Machine	<a href="#">0623006200</a>

Number of Rows	1
Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface	2.50mm
Pitch - Termination Interface	2.50mm
Plating min - Mating	1.016µm
Plating min - Termination	1.016µm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-20C to +120C
Termination Interface: Style	IDT or Pierce
Wire Size AWG	22, 24

### **Electrical**

Current - Maximum per Contact	2A
Voltage - Maximum	250V AC

### **Material Info**

### **Reference - Drawing Numbers**

Application Specification	AS-99033-0008
Packaging Specification	PK-90871-001
Product Specification	PS-99020-0040
Sales Drawing	SD-93050-001

This document was generated on 06/26/2013

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**