
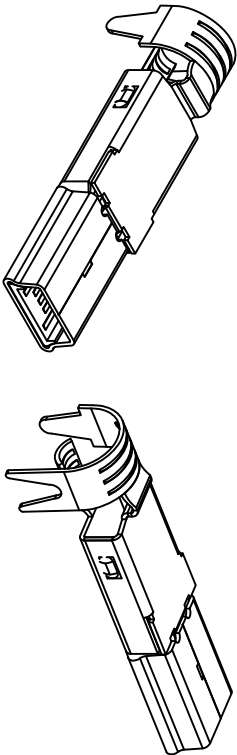
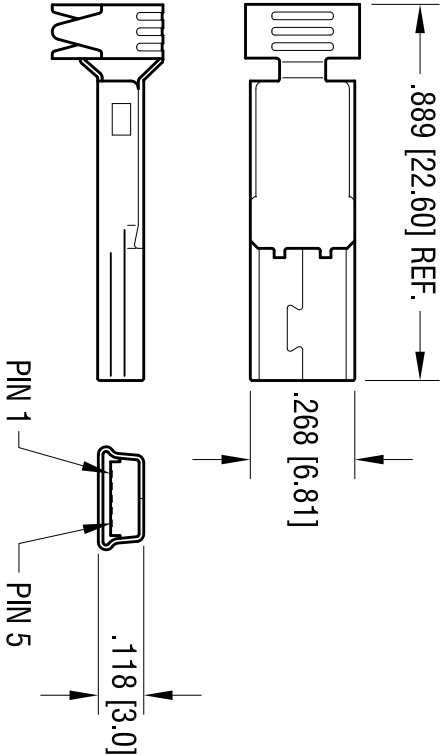



DATE	DESCRIPTION	REV.
5.31.11	CHANGE AS PER ECN 11-072	A

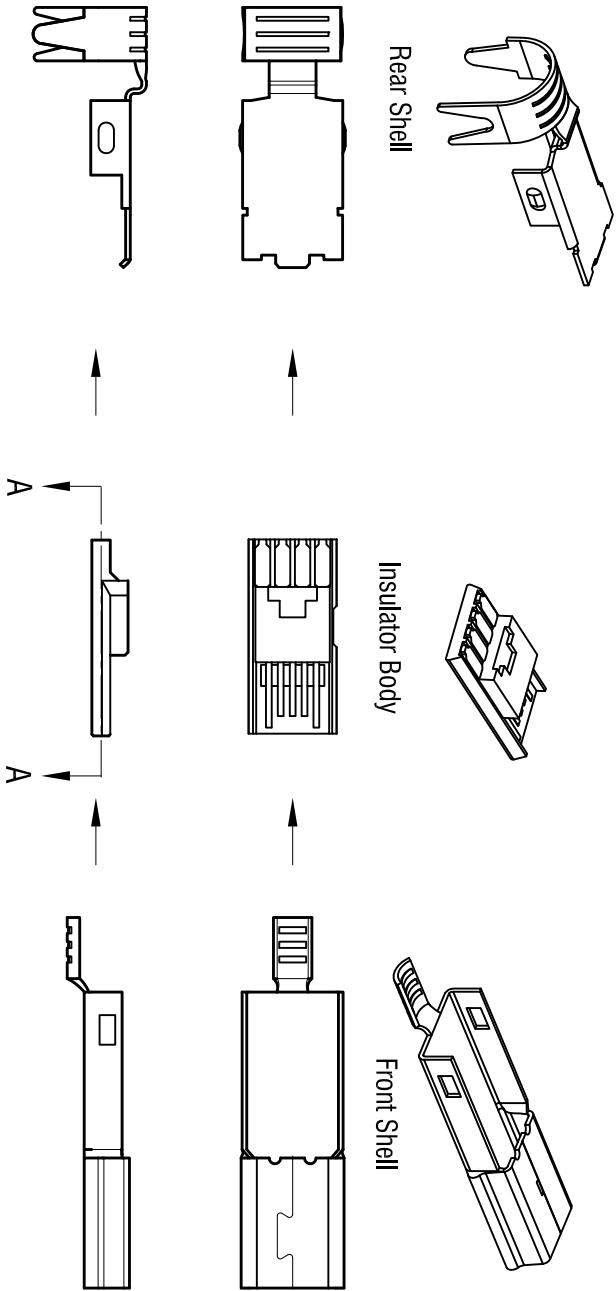

- NOTE:
- SHELL: MAT'L- STEEL
- FINISH: TIN OVER NICKEL PLATING
- INSULATION: THERMOPLASTIC, UL 94V-0
- CONTACT: MAT'L- PHOSPHOR BRONZE
- FINISH: GOLD PLATE ON CONTACT AREA
- TIN OVER NICKEL ON SOLDER TAILS
- ELECTRICAL CHARACTERISTICS:
- CONTACT RESISTANCE: 30m Ω max.
- INSULATION RESISTANCE: 1000 MEGA Ω min.
- DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC

KEYSTONE ELECTRONICS CORP. www.keystecoe.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900				
PART NAME				
USB MINI PLUG				
MATERIAL				
AS NOTED				
FINISH		DRN BY	DATE	
AS NOTED		BOONE	7.17.06	
TOLERANCES		CODE	DWG NO.	
DECIMAL $\pm .015$ [± 0.38]		APPD	LN	SCALE
ANGULAR $\pm 1^{\circ}$		C/M		2X
UNLESS OTHERWISE SPECIFIED				

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.