

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [94090-4080](#)  
**Status:** **Active**  
**Overview:** Quick Disconnect Terminals  
**Description:** 2 Circuit Housing for Quick Disconnect Female Terminal, Accepts 6.35 x 0.81mm Tab

**Documents:**

[3D Model](#) [Product Specification PS-94090-001 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**General**

Product Family	Crimp Housings
Series	<a href="#">94090</a>
Application	Power, Wire-to-Wire
Overview	<a href="#">Quick Disconnect Terminals</a>
Product Name	Quick Disconnect
UPC	800754327916


**Physical**

Breakaway	No
Circuits (maximum)	2
Color - Resin	Natural
Gender	Female
Glow-Wire Compliant	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Resin	Nylon
Net Weight	1.460/g
Number of Rows	2
Packaging Type	Carton
Panel Mount	No
Pitch - Mating Interface	5.80mm, 8.30mm
Polarized to Mating Part	No
Ports	2
Stackable	No
Temperature Range - Operating	-40°C to +105°C

**Material Info**

**Reference - Drawing Numbers**

Product Specification	PS-94090-001
Sales Drawing	SD-94090-013

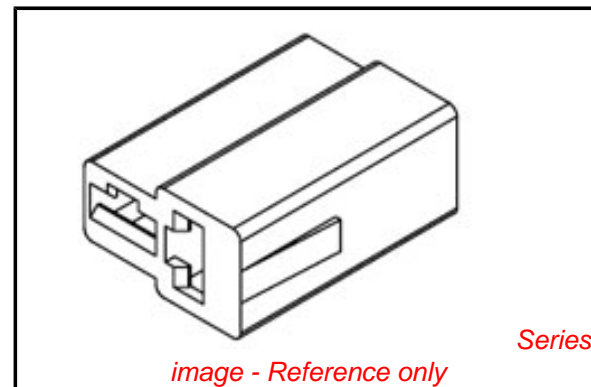

**EU RoHS**

**ELV and RoHS  
Compliant**  
**REACH SVHC  
Not Reviewed**  
**Low-Halogen Status  
Not Reviewed**

**China RoHS**



**Need more information on product  
environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[94090Series](#)

**Use With**

6.35 x 0.81mm Tab