

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [94506-9000](#)
Status: **Active**
Overview: Quick Disconnect Terminals
Description: Quick Disconnect Safelock Housing, accepts 6.35 x 0.81mm Female Tab Terminal, 14-20 AWG Wire, 1 Circuit

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
 UL E29179

General

Product Family Crimp Housings
 Series [94506](#)
 Application Power
 Overview [Quick Disconnect Terminals](#)
 Product Name Quick Disconnect, Safelock
 UPC 800754331449

Physical

Breakaway No
 Circuits (maximum) 1
 Color - Resin White
 Flammability 94V-2
 Gender Female
 Glow-Wire Compliant No
 Lock to Mating Part None
 Material - Resin Nylon
 Net Weight 0.572/g
 Number of Rows 1
 Packaging Type Bag
 Panel Mount No
 Pitch - Mating Interface N/A
 Pitch - Termination Interface N/A
 Polarized to Mating Part No
 Temperature Range - Operating -40°C to +105°C

Material Info

Reference - Drawing Numbers

Sales Drawing SD-94506-001

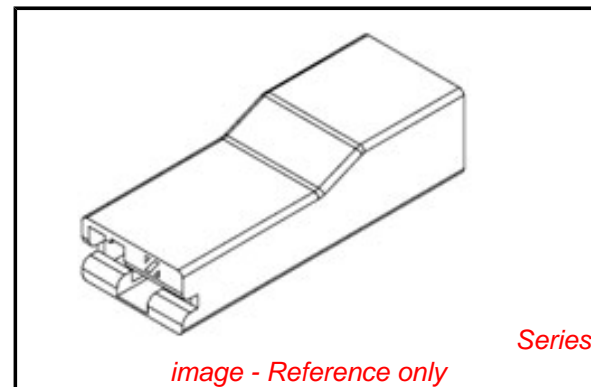


image - Reference only

EU RoHS

**ELV and RoHS
 Compliant**

REACH SVHC

Not Reviewed

Low-Halogen Status

Low-Halogen

China RoHS



**Need more information on product
 environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of
 Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
 non-product compliance questions.

Search Parts in this Series

94506Series

Use With

94506-0100